





± 178 - 200mm

Image shown above 16.9a.1, 500mm extender, with pendant anchor kit

Mounting Ceiling mounted

Glass Colours Grey 1, grey 2, white 1, white 2

Lamp 1W LED, 2700K, 100Im (2500K and 3000K options available)

Extenders Available in 150mm, 250mm, 500mm, 1200mm, 750mm

(attached with 2 pendants). Up to 2500mm drop

Finish Black powder coated

Materials Poured glass, black powder coated stainless steel armature,

electrical components, matte black canopy

Power Supply Integral

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP20

Note Pendant anchor kit include

Note Pendant anchor kit included.

Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual,

irregular expressions of our research.

Patent # CAN 16234

US D754,911

EU 002687774 - 0001 to 0012

Certifications



Weight (kg)


16.5a.1	16.7
16.8a.1	26.6
16.8a.2	28.2
16.9a.1	25.8
16.9a.2	29.5
16.11a.1	38.1
16.11a.2	36.2
16.13a.1	42.9
16.17a.1	55.7
16.20a.1	67.1
16.23a.1	78.7
16.33a.1	112.9

Each product is unique, there may be a variance in the weight up to 10%.





16.5A.1


All dimensions are in millimeters (mm) unless otherwise specified.




840 with 500 extender Maximum 2500 drop









16.8A.1



780 with 500 extender

Maximum 2500 drop




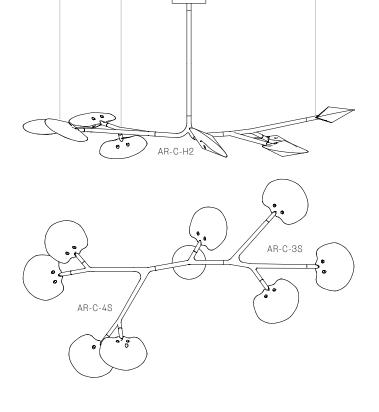




16.8A.2

All dimensions are in millimeters (mm) unless otherwise specified.





835 with 500 extender Maximum 2500 drop

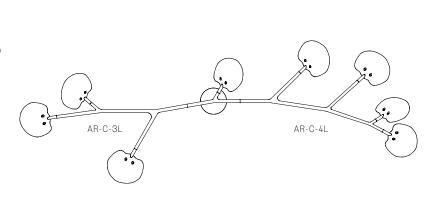

AR-C-H2

16.9A.1

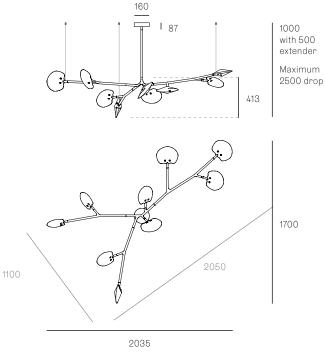


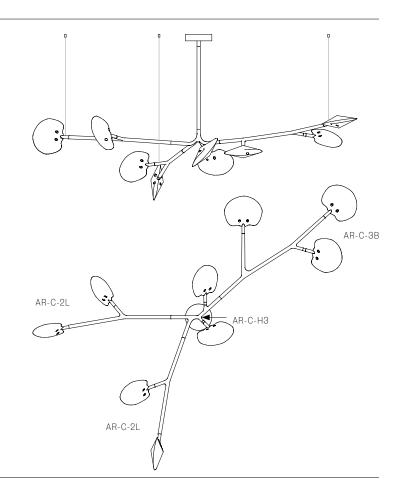





16.9A.2


All dimensions are in millimeters (mm) unless otherwise specified.



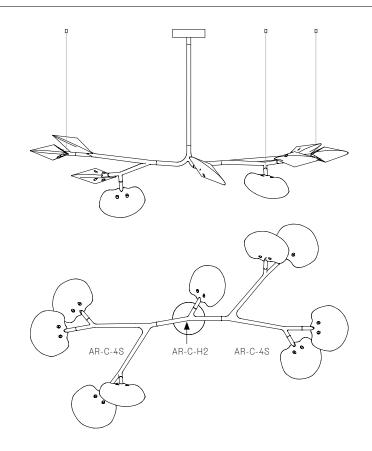

16.11A.1

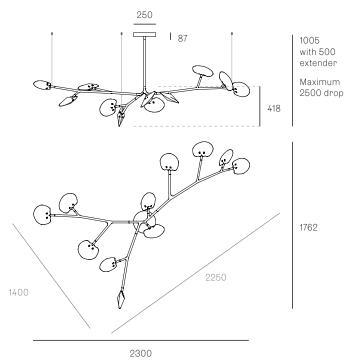

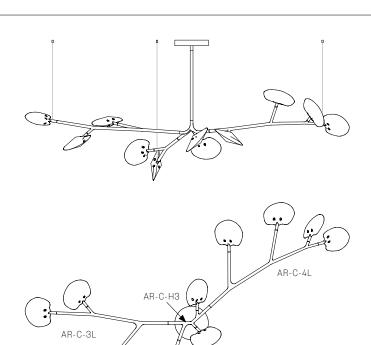


AR-C-2L




16.11A.2


All dimensions are in millimeters (mm) unless otherwise specified.




905 with 500 extender

Maximum 2500 drop






16.13A.1




1750

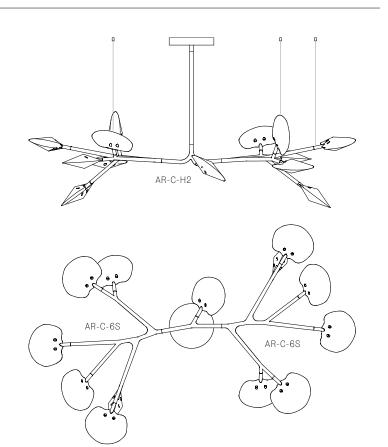





16.17A.1

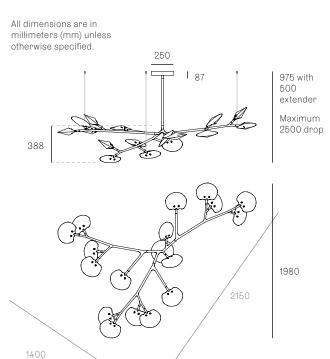


1890

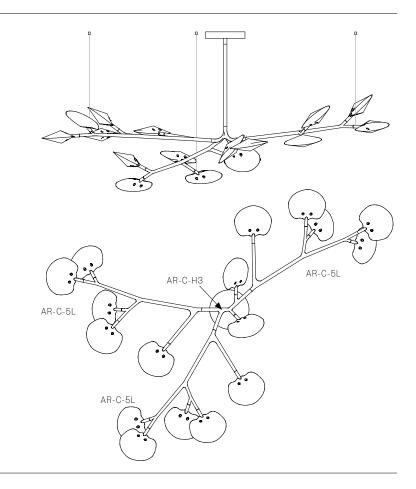


16.20A.1

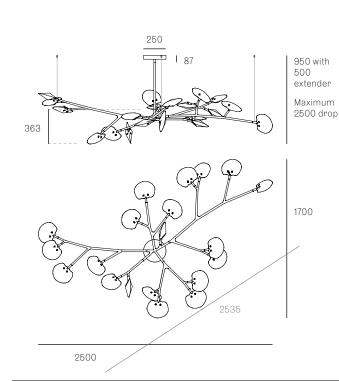


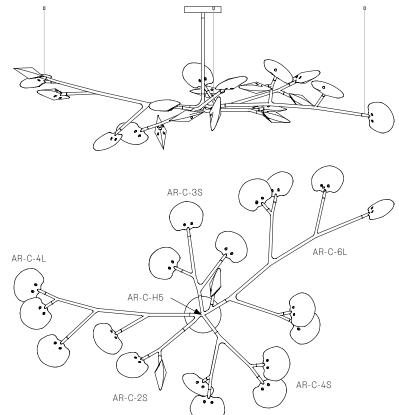



16.23A.1

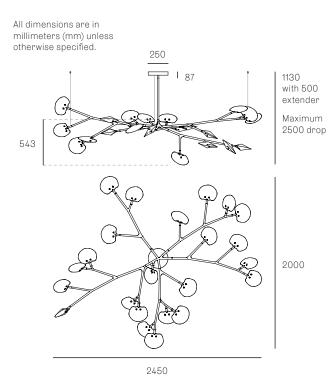

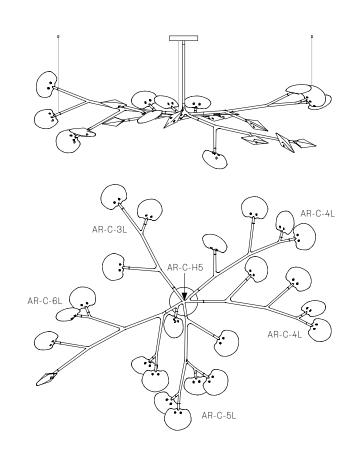

16.33A.1

