

approx 2kg (4.5lb)

- PENDANTS: one
- MOUNTING: 55mm (2.2") in diameter
- LAMPING: 1.5w LED (2500K or 3500K) / 10w xenon (2600K)
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, copper mesh, electrical components, silicon gasket, metal mounting plate
- WEIGHT: approximately 2kg (4.5lb)
- POWER SUPPLIES: remote mounted. Power supplies included

DESCRIPTION

The 's' designation in this variation on the 84 refers to it being surface-mounted, with Power supplies mounted remotely. This surface light has a discrete 55mm (2.2") mounting plate designed for installation on walls or ceilings.

A white glass bubble is captured inside a fine copper mesh basket and then plunged into hot clear glass. Air is blown into the matrix to gently push the white glass through the mesh, creating a delicate pillowed form that is suspended inside the thick outer layer of clear glass. Sometimes the copper mesh basket folds and crinkles, adding specificity to each piece.

NOTES


- + Purchase replacement lamps online at www.bocci.com/shop/bulbs
- + Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible
- + Please specify the colour temperature when ordering LED fixtures
- + Unless otherwise specified, a single class 2 power supply will be sent for every 5 xenon fixtures or every 12 LED fixtures
- + Suitable for wet locations

US Patent Pending
EU Patent # 003611144-0001 to 0004


Made in Vancouver, Canada

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europa@bocci.com
www.bocci.com



SURFACE LIGHT
84s PRODUCT SPECIFICATION




1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Xenon (110V) or LED: connect the black wire to live wire and white wire to neutral wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

Note: Standard junction boxes are not compatible with the 84s. The surface mounted light cover plate mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

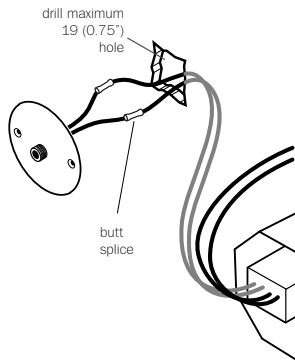

2

Drill a maximum 19mm (0.75") diameter hole.


Join power supply wiring to back plate wiring using #16 butt splices, provided (stagger the splices).

Tuck wiring into wall opening and affix the back plate with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.

Turn power to fixture on.

DRY LOCATION




3

For dry location:

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.

Note: when using a dimmer use only low voltage electronic dimmer.

WET LOCATION

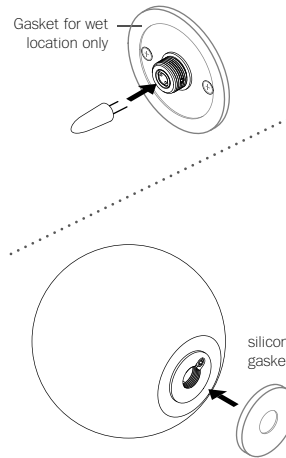


4

For wet location:

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.


Install the silicone ring by slightly stretching it to fit around the back plate and on the glass pendant.

Note: when using a dimmer use only low voltage electronic dimmer.



5

Gently thread glass pendant onto back plate. Do not tighten past the point of contact.



6

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europe@bocci.com
www.bocci.com

US Patent Pending
EU Patent # 003611144-0001
to 0004

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE
E476186

SURFACE LIGHT

84s

PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

BOCCI