

approx. 2.7kg (6lb)

- PENDANTS: one
- MOUNTING: metal mounting plate 79mm (3.1") in diameter
- LAMPING: 1.5w LED or 10w xenon
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, stainless steel hardware, electrical components, silicone gasket, metal mounting plate
- WEIGHT: approx. 2.7kg (6lb)
- POWER SUPPLIES: remote mounted. Power supplies included

#### DESCRIPTION

The 's' designation in this variation on the 73 refers to it being surface-mounted, with power supplies mounted remotely. This surface light has a discrete 79mm (3.1") in diameter mounting plate designed for installation on walls as well as ceilings. It is also IP65 designated meaning that the 73s can be used outdoors and in other wet environments.

The 73 is formed by blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. Each 73 is completely unique in proportion, size and shape.

#### NOTES


- + Purchase replacement lamps online at [www.bocci.com/shop/bulbs](http://www.bocci.com/shop/bulbs)
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + Unless otherwise specified, a single class 2 power supply will be sent for every 5 xenon fixtures or every 12 LED fixtures
- + Requires power supplies to be remote mounted.

US Patent # D762,323 S  
EU Patent # 002633230-0001 - 0003

Made in Vancouver, Canada


Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com



SURFACE LIGHT (WET LOCATION)

**73s** PRODUCT SPECIFICATION




# 1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Xenon (110V) or LED: connect the black wire to live wire and white wire to neutral wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.


Note: Standard junction boxes are not compatible with the 73s. The surface mounted light cover plate mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.



# 2

Drill a maximum 13mm (0.75") diameter hole.

Join power supply wiring to back plate wiring using #16 butt splices, provided (stagger the splices).



# 3

Slightly stretch the silicone ring to fit around the cover plate.

Tuck wiring into wall opening and affix the cover plate with fasteners provided.


Turn power to fixture on.

Bocci LED or xenon lamps included.

Plug the lamp into the socket.


Do not touch the lamp with your bare hands. Ensure power to lamp is working correctly.

Note: when using a dimmer use only low voltage electronic dimmer.

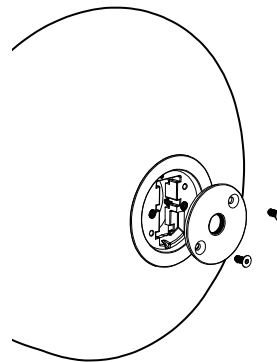


# 4

Attach the attachment plate with fasteners provided.

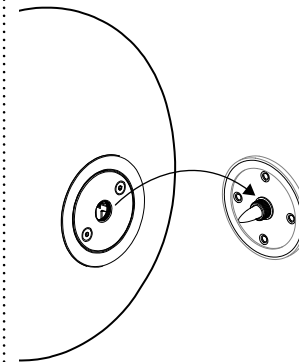

# 5

Gently thread glass pendant onto back plate.



# 6

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

US Patent # D762,323 S  
EU Patent # 002633230-0001  
- 0003

Made in Vancouver, Canada



SURFACE LIGHT

# 73s

PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

# BOCCI