




BRASS ARCHITECTURAL COLLECTION
PENDANT 80, 2017

Polished Brass
Mouth blown opaline glass
Pendant rod length to order



OVERALL DIMENSIONS


(Small ceiling rose only for 240V)



STANDARD MATERIAL/FINISH



CUSTOM FINISHES



CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.


Polished Brass: As the item is unlacquered it will naturally oxidise and darken. Upon touching the items without gloves, fingerprints are likely to occur and leave marks. Use a good quality brass cleaning liquid and follow the product instructions using the extra soft dust cloth. Do not apply pressure on persistent marks. Remove them using repeated gentle motions and by reapplying the brass cleaning liquid.

Plated Finish: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth and gently go over marks until clean. The brass patina is achieved through an artisanal technique of applying pigments by hand during a hot patination process. Through this alchemic process, the brass is transformed whilst retaining the material's inherent qualities. It will mature and change overtime. The manner and speed in which it will change will depend on the environment, handling and the level and frequency of maintenance. Verdigris can also appear when the copper in the brass begins to oxidise.

BACKPLATE DIMENSIONS

Mounting screws not included.
5mm countersunk screw recommended.

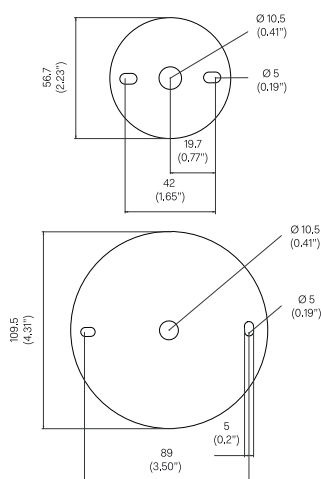

BULB SPECIFICATIONS

G9 2W LED bulb
250 lm / 2700K

PRODUCT SPECIFICATIONS

Input voltage: 120V / 240V
Maximum wattage: 5W
120V / 240V dimmable LED triac
Weight: 2kg
IP20

Please supply required drop length of fixture, measured from the ceiling to bottom fitting at time of order.

Minimum total drop length 240V: 200mm.
Maximum total drop length 240V: 2080mm.
Minimum total drop length 120V: 200mm.
Maximum total drop length 120V: 2075mm.

Please allow 25mm tolerance of drop length.




BRASS ARCHITECTURAL COLLECTION
PENDANT 150, 2017

Polished Brass
Mouth blown opaline glass
Pendant rod length to order




OVERALL DIMENSIONS

(Small ceiling rose only for 240V)

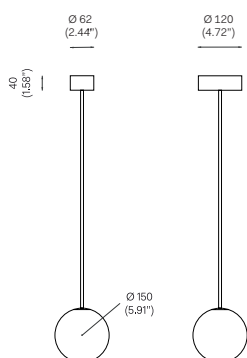


BACKPLATE DIMENSIONS


Mounting screws not included.
5mm countersunk screw recommended.

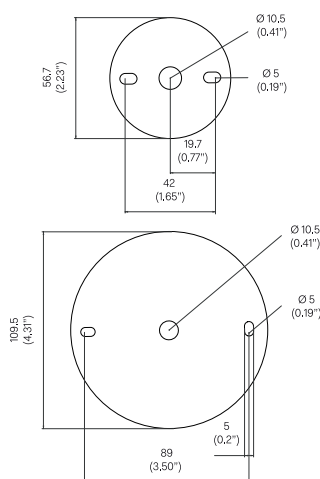

STANDARD MATERIAL/FINISH



CUSTOM FINISHES



CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

Polished Brass: As the item is unlacquered it will naturally oxidise and darken. Upon touching the items without gloves, fingerprints are likely to occur and leave marks. Use a good quality brass cleaning liquid and follow the product instructions using the extra soft dust cloth. Do not apply pressure on persistent marks. Remove them using repeated gentle motions and by reapplying the brass cleaning liquid.

Plated Finish: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth and gently go over marks until clean. The brass patina is achieved through an artisanal technique of applying pigments by hand during a hot patination process. Through this alchemic process, the brass is transformed whilst retaining the material's inherent qualities. It will mature and change overtime. The manner and speed in which it will change will depend on the environment, handling and the level and frequency of maintenance. Verdigris can also appear when the copper in the brass begins to oxidise.

Opaline Glass: Remove the opaline glass from the product. Using a lightly damp cloth, clean only the outside of the sphere. Only put the glass sphere back on the product once it is fully dry.

BULB SPECIFICATIONS

G9 3.5W LED bulb
330 lm / 2700K

PRODUCT SPECIFICATIONS

Input voltage: 120V / 240V
Maximum wattage: 40W
120V / 240V dimmable LED triac
Product weight: 2.5kg
IP20

Please supply required drop length of fixture, measured from the ceiling to bottom fitting at time of order.

Minimum total drop length 240V: 300mm.
Maximum total drop length 240V: 2150mm.
Minimum total drop length 120V: 300mm.
Maximum total drop length 120V: 2140mm.

Please allow 25mm tolerance of drop length.




BRASS ARCHITECTURAL COLLECTION PENDANT 250, 2017

Polished Brass
Mouth blown opaline glass
Pendant rod length to order




OVERALL DIMENSIONS

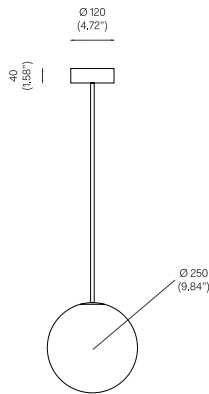


BACKPLATE DIMENSIONS


Mounting screws not included.
5mm countersunk screw recommended.



STANDARD MATERIAL/FINISH



CUSTOM FINISHES



BULB SPECIFICATIONS

E26 / E27 13W LED bulb
1400lm / 2700k

PRODUCT SPECIFICATIONS

Input voltage: 120V / 240V
Maximum wattage: 75W
120V / 240V dimmable LED triac
Product weight: 3.5kg
IP20

Please supply required drop length of fixture, measured from the ceiling to bottom fitting at time of order.

Minimum total drop length: 400mm.
Maximum total drop length: 2245mm.

Please allow 25mm tolerance of drop length.

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

Polished Brass: As the item is unlacquered it will naturally oxidise and darken. Upon touching the items without gloves, fingerprints are likely to occur and leave marks. Use a good quality brass cleaning liquid and follow the product instructions using the extra soft dust cloth. Do not apply pressure on persistent marks. Remove them using repeated gentle motions and by reapplying the brass cleaning liquid.

Plated Finish: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth and gently go over marks until clean. The brass patina is achieved through an artisanal technique of applying pigments by hand during a hot patination process. Through this alchemical process, the brass is transformed whilst retaining the material's inherent qualities. It will mature and change overtime. The manner and speed in which it will change will depend on the environment, handling and the level and frequency of maintenance. Verdigris can also appear when the copper in the brass begins to oxidise.

Opaline Glass: Remove the opaline glass from the product. Using a lightly damp cloth, clean only the outside of the sphere. Only put the glass sphere back on the product once it is fully dry.




BRASS ARCHITECTURAL COLLECTION
PENDANT 350, 2017

Polished Brass
Mouth blown opaline glass
Pendant rod length to order




OVERALL DIMENSIONS

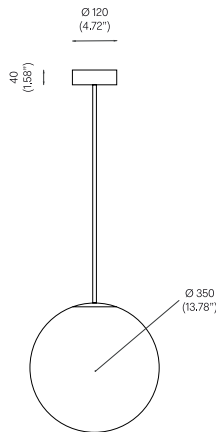


BACKPLATE DIMENSIONS


Mounting screws not included.
5mm countersunk screw recommended.



STANDARD MATERIAL/FINISH



CUSTOM FINISHES



BULB SPECIFICATIONS

E26 14 W / E27 15W LED bulb
2000lm / 2700k

PRODUCT SPECIFICATIONS

Input voltage: 120V / 240V
Maximum wattage: 150W
120V / 240V dimmable LED triac
Product weight: 4.5kg
IP20

Please supply required drop length of fixture,
measured from the ceiling to bottom fitting at
time of order.

Minimum total drop length: 500mm.
Maximum total drop length: 2340mm.

Please allow 25mm tolerance of drop length.

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must
be turned off and unplugged from mains
electricity. Whilst cleaning please take care
and use the gloves provided.

Polished Brass: As the item is unlacquered
it will naturally oxidise and darken. Upon
touching the items without gloves, fingerprints
are likely to occur and leave marks. Use
a good quality brass cleaning liquid and
follow the product instructions using the
extra soft dust cloth. Do not apply pressure
on persistent marks. Remove them using
repeated gentle motions and by reapplying
the brass cleaning liquid.

Plated Finish: Use a lightly damp soft dust
cloth and gently go over marks until clean.
Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth
and gently go over marks until clean. The
brass patina is achieved through an artisanal
technique of applying pigments by hand
during a hot patination process. Through this
alchemic process, the brass is transformed
whilst retaining the material's inherent
qualities. It will mature and change overtime.
The manner and speed in which it will change
will depend on the environment, handling
and the level and frequency of maintenance.
Verdigris can also appear when the copper in
the brass begins to oxidise.

Opaline Glass: Remove the opaline glass from
the product. Using a lightly damp cloth, clean
only the outside of the sphere. Only put the
glass sphere back on the product once it is
fully dry.