
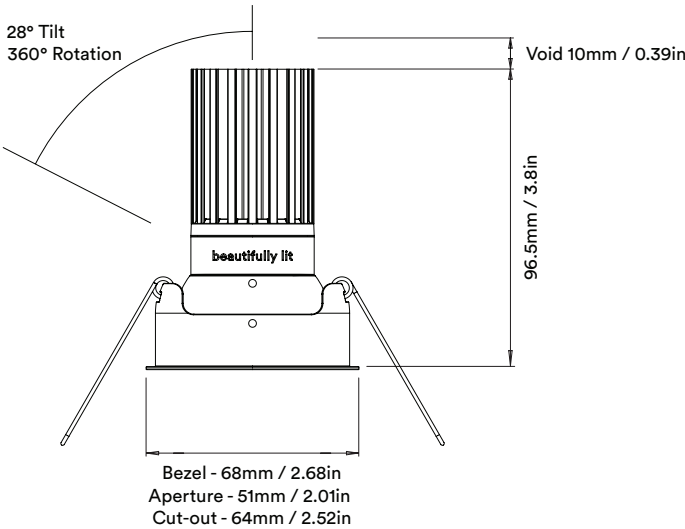


infinity midi fixed
origin

installation

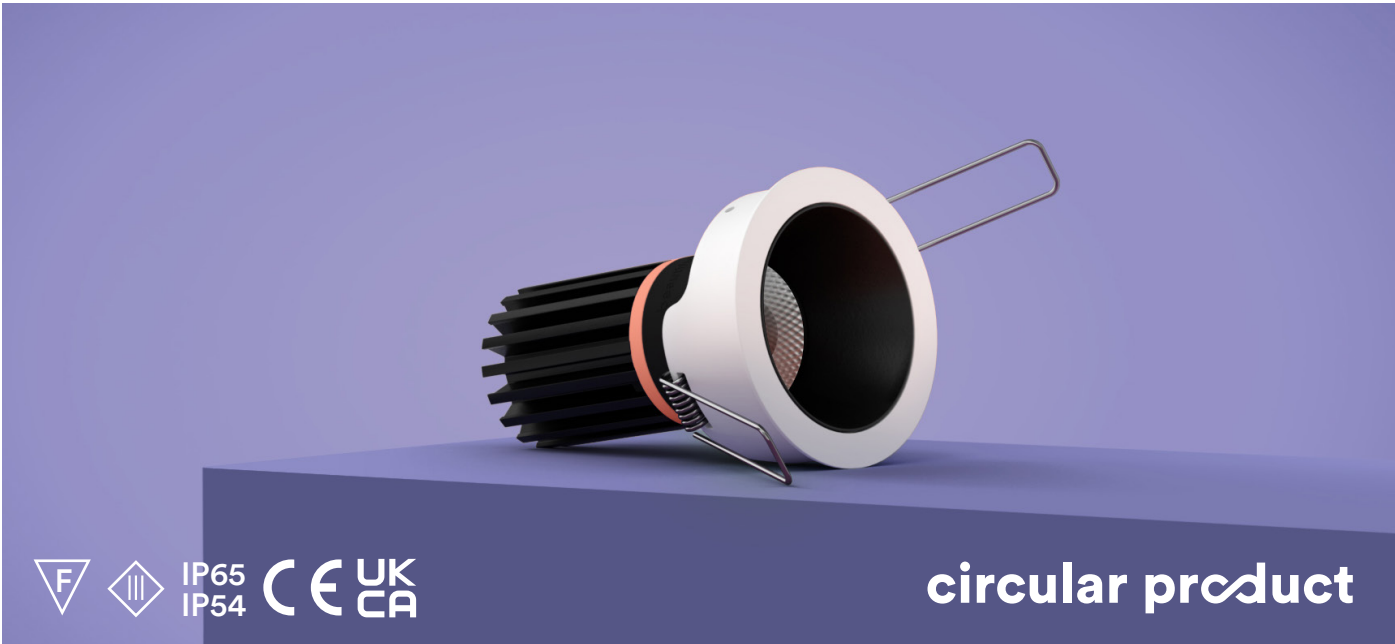

How to Install

- Cut hole in ceiling as per above cut-out;
- Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Bend back mouse trap springs and feed luminaire into cut-out pushing the light fitting fully up into the ceiling. Ensure Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details

Cut-out	Ø64mm	Class	III
Recess Depth	97mm	IP Rating	IP54/IP65
Clearance	Ø250mm	IP Zone	Zone 1
Fixing Method	Mouse Trap springs	Material	Aluminium ADC12
Min Ceiling Thickness	1mm	Cable type	2 Core 0.75mm²
Max Ceiling Thickness	28mm	Cable Length	300mm
Max Driver Distance	20m	Bezel Temp	F Rated