



F1084064 Bright Aluminium

Bellhop Glass S1

Designed by Edward Barber and Jay Osgerby, 2025



LED retrofit - 30W

Bellhop Glass Suspension can be used it as an ambient but also as a task light, which directly illuminates, with a non-blinding cone of light, the surface on which it is suspended. The hole in the bottom part of the lamp, protected by an aluminum element, is shaped to direct the light (and change the bulb) avoiding the diffusion up to the eyes of those sitting at the table. A cone of light is therefore created inside the suspended Bellhop Glass, which expands homogeneously in the environment on all sides and lands on the table precisely, like a torch, visually signaled by the colored aluminum ring that surrounds the lower opening of the lamp.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Ø132 0027 Ø68,4 Ø330

Main specifications

EAN	8059607073797	
Mounting	Suspension	
Environments	Indoor dry location	
Light source type	Bulb	
Light sources included	No	
Lamp category	LED retrofit	
Lamp type	А	
Lamp holders	E27	
Ilcos	HSGSA	
Number of lamps	1	
Power (W)	30	
System power (W)	30	

Physical

Colour	Bright Aluminium
Length (mm)	330
Cord length (mm)	2700
Canopy colour	White
Canopy length/diameter (mm)	132
Canopy height (mm)	31
Net weight (kg)	3.1
Package volume (m3)	0.07
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

· 上:

Ecodesign and Energy Labelling



Replaceable (LED only) light source by an enduser

https://professional.flos.com/en/global/product/bellhop-glass-s1-f1084064/

F1084064

















Schematic light drawing



Beam Angle: - 73'		
h(m)	E(lx)	D(m)
1	878	1.48
2	219	2.97
3	98	4.45
4	55	5.94
5	35	7.42


Luminous flux **l**uminaire 3400 lm

Photometric

Lighting type	Total
Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	I	
Frequency (Hz)	50/60	
Main voltage (Vac)	220-250	
Dimmable	Yes	
Dimming interface	Remote Dimmable (Dimmer Not Included)	
Batteries inside	No	




NOT INCLUDED

RF36503

LED 25W E27 3700lm 2700K 240° DIMMER

Spare Parts

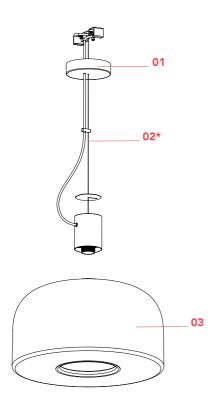

*To be replaced only by authorised service centres or qualified professionals.

01. Bellhop Glass S shiny white RF1081109 ceiling rose assembly

)2. Steel cable 3 meters RF36887







RF1081109

Bellhop Glass S shiny white ceiling rose assembly

RF36887

Steel cable 3 meters





F1081064 Bright Aluminium

Bellhop Glass S2

Designed by Edward Barber and Jay Osgerby, 2025



LED retrofit - 30W

Bellhop Glass Suspension can be used it as an ambient but also as a task light, which directly illuminates, with a non-blinding cone of light, the surface on which it is suspended. The hole in the bottom part of the lamp, protected by an aluminum element, is shaped to direct the light (and change the bulb) avoiding the diffusion up to the eyes of those sitting at the table. A cone of light is therefore created inside the suspended Bellhop Glass, which expands homogeneously in the environment on all sides and lands on the table precisely, like a torch, visually signaled by the colored aluminum ring that surrounds the lower opening of the lamp.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607067758	
Mounting	Suspension	
Environments	Indoor dry location	
Light source type	Bulb	
Light sources included	No	
Lamp category	LED retrofit	
Lamp holders	E27	
Ilcos	HSGSA	
Number of lamps	1	
Power (W)	30	
System power (W)	30	

Physical

Colour	Bright Aluminium
Orientation	Fixed
Length (mm)	450
Cord colour	Grey
Cord length (mm)	2700
Canopy colour	White
Canopy length/diameter (mm)	132
Canopy height (mm)	31
Net weight (kg)	7.2
Package volume (m3)	0.14
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

	 _	0	
2D			↓ ZIP
3D			<u>↓</u> ZIP

Ecodesign and Energy Labelling



Replaceable (LED only) light source by an enduser

https://professional.flos.com/en/global/product/bellhop-glass-s2-f1081064/

F1081064




















Schematic light drawing



 Beam Angle: - 60°

 h(m)
 E(lx)
 D(m)

 1
 927
 1.15

 2
 232
 2.30

 3
 103
 3.45

 4
 58
 4.60

 5
 37
 5.75


Luminous flux Juminaire 3660 lm

Photometric

Lighting type	Total
Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	1
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No




NOT INCLUDED

RF36503

LED 25W E27 3700lm 2700K 240° DIMMER

Spare Parts

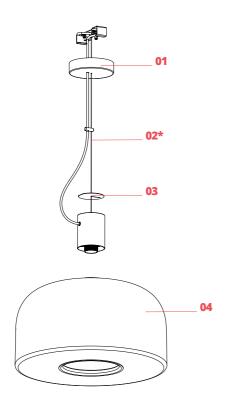

*To be replaced only by authorised service centres or qualified professionals.

Bellhop Glass S shiny white ceiling rose assembly Steel cable 3 meters

Bellhop Glass S2 white diffuser

shiny ring







RF1081109

Bellhop Glass S shiny white ceiling rose assembly

RF36887

Steel cable 3 meters

F100206/

Bellhop Glass S2 white diffuser shiny ring