
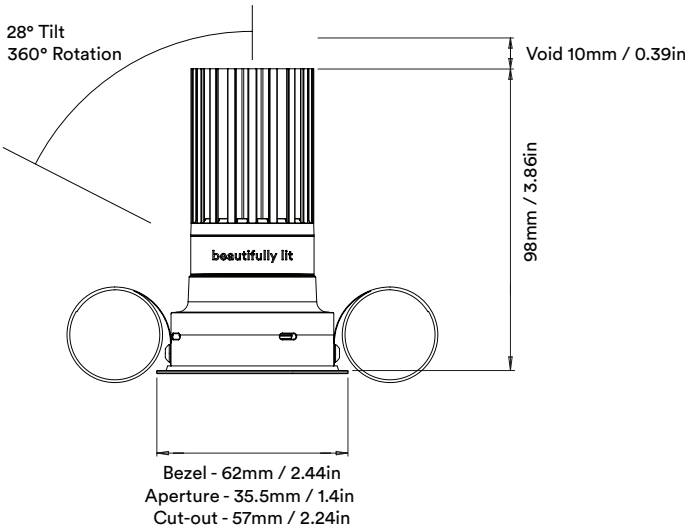


suri midi fixed
origin

installation

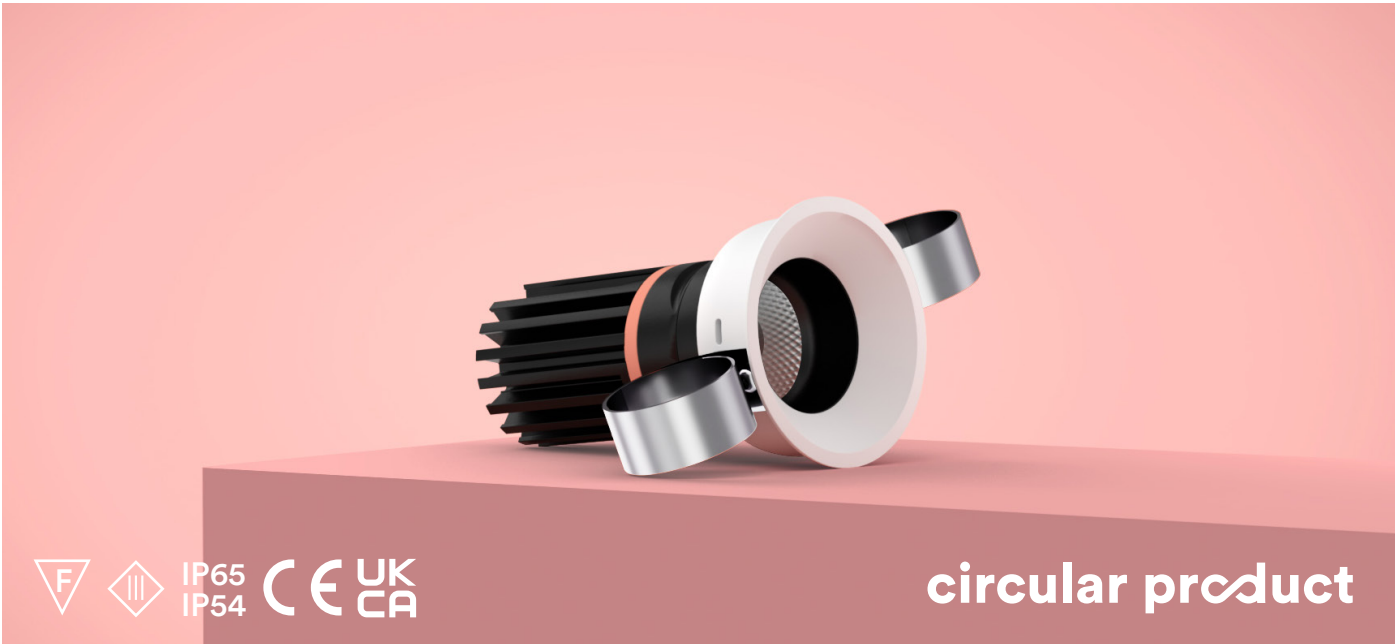

- How to Install**
- Cut hole in ceiling as per above cut-out;
 - Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
 - With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
 - Feed luminaire into cut-out by inserting constant torsion springs first and pushing the light fitting fully up into the ceiling, ensuring Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details			
Cut-out	Ø57mm	Class	III
Recess Depth	98mm	IP Rating	IP54/IP65
Clearance	Ø250mm	IP Zone	Zone 1
Fixing Method	Constant Torsion Springs	Material	Aluminium ADC12
Min Ceiling Thickness	8mm	Cable type	2 Core 0.75mm²
Max Ceiling Thickness	28mm	Cable Length	300mm
Max Driver Distance	20m	Bezel Temp	F Rated