

approx 8kg (17.6lb)

- LIGHT SOURCES: three
- MOUNTING: white powder-coated canopy 152mm (6") in diameter x 32mm (1.3") deep
- LAMPING: 1.5w LED or 10w xenon
- LENGTH OF COPPER: as specified by client, up to 9900mm (32') technical maximum
- INSTALLATION: jack-connected (preset lengths, composed during installation)
- MATERIALS: blown glass, steel canopy, electrical components, flexible copper tubing, copper hardware
- WEIGHT: approximately 8kg (17.6lb)
- POWER SUPPLIES: integral

DESCRIPTION

The 38.3 is a 38 series light fixture with 3 light sources and 2 moons. The 38 series is an extension of the blown glass technique introduced in the 28 series. In this case, there are 4-6 cavities blown within each pendant, 3 of which house light sources, while the remainder are deep enough to house plants.

Electricity and suspension are achieved using stiff copper tubing, which is allowed to tangle and crinkle, seemingly without regard for gravity. Once in a while these copper tubes loop around moon white planters, which appear to have escaped from the confines of the lit clear glass spheres.

NOTES

- + Purchase replacement lamps online at www.bocci.com/shop/bulbs
- + Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible
- + Air plants and/or succulents recommended (not included). Prior to watering the plants, please wait for the glass to cool down.

EU Patent # 002071019-001

Made in Vancouver, Canada


Vancouver
sales@bocci.com
www.bocci.com

Berlin
europe@bocci.com
www.bocci.com



38.3

PRODUCT SPECIFICATION




152 (6')

1

Measure and mark the light fixture canopy position on the ceiling.

Ensure structural substrate is strong enough to support fixture weight.

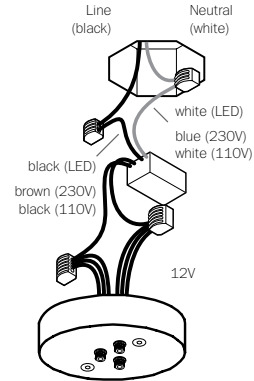

2

Connect power supplies inside the canopy to line voltage.

Xenon (110V) or LED: connect the black wire to black and white wire to white wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

Note: Bocci recommends mounting power supplies remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure compliance with the code.

3

Tuck the power supply and wiring into the junction box, if available. If junction box is not available, use the back plate to enclose the wiring and transformer into the fixture.

Mount canopy directly to junction box with fasteners provided or affix directly to structural ceiling surface.

Turn power to fixture on.

4

Separate the copper tubes according to length.

Each copper tube is labeled with a series of numbers that correspond to its length in millimeters.

5

Very carefully uncoil the copper tube with both hands to avoid kinking.


Note: be very careful not to overbend the copper tubes as it will leave a permanent kink that can not be removed.

6

Each copper tube terminates in a "headphone jack" type connector, which plugs into a receiving receptacle in the canopy.

7

Locate and install the shortest copper tube, which will be the load-bearing length for the pendant. Plug the headphone jack-connector into the canopy receptacle and turn the threaded barrel until adequately tightened.

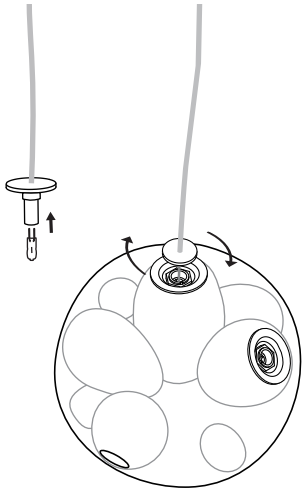

8

Bocci lamps are included. Plug a lamp into each socket prior to connecting to the pendant. Do not touch the lamp with your bare hands. Ensure power to lamp is working correctly.

Determine the orientation of the pendant by choosing the topmost mounting point that will allow the large cavities to face upwards in order to receive the plants.

Connect the pendant to the load bearing copper tube by tightening the center cap by hand.

DO NOT OVERTIGHTEN.


Tighten the set screw in the cap with the Allen key provided.

Note: When using a dimmer, use low voltage electronic dimmer.



9


Install the remaining copper tubes one at a time, gently bending them with both hands to avoid kinking.

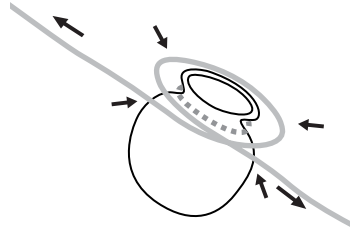

10


Prior to connecting the remaining tubes to the pendants, be sure to install the glass moons, one moon per tube.

When installing the moons, first gently form a loop with the tube approximately 130mm (5") in diameter in the location of your choice. Insert the moon into the loop and tighten the loop around the moon, using the glass lip as a guide.

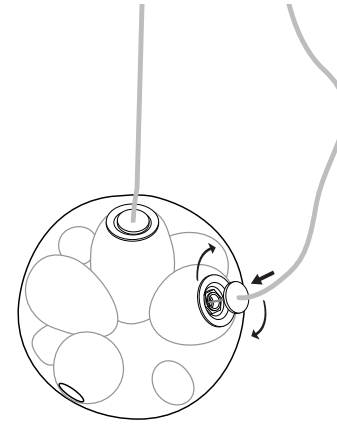

11

Once the moons are installed, connect the tubes to the pendant by tightening the center cap of each copper tube by hand.

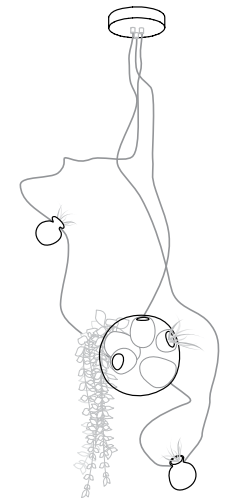

12

Place the plants into the pendant and moon cavities as desired. Reshape the tubes as needed.

Note: Bocci recommends succulents and/or air plants (not included).

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europa@bocci.com
www.bocci.com

EU Patent # 002071019-001

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE
E476186