

±300-500  
(12-20')

±115-240  
(4.5-9.5')

WALL LIGHT

87s

Design by Omer Arbel  
PRODUCT SPECIFICATION

PENDANTS: one

MOUNTING: white powder coated metal mounting plate 55mm (2.2') in diameter

LAMPING: 1.5w LED

INSTALLATION: threaded on - wall mount

MATERIALS: pulled glass, electrical components, metal mounting plate

WEIGHT: approximately 1.4kg (3lb)

POWER SUPPLIES: remote mounted.

#### DESCRIPTION

The 's' designation in this variation on the 87 refers to it being surface-mounted, with power supplies mounted remotely. This surface light has a discrete 55mm (2.2') mounting plate designed for installation on walls.

A vacuum is introduced to a strata composed of hot white and clear glass with copper mesh between. The vacuum causes the white layer to pull away through the embedded mesh, leaving numerous tendrils of white glass suspended within an interstitial space as it goes.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.com/shop/bulbs](http://www.bocci.com/shop/bulbs)
- + Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible


Worldwide patents pending  
EU Patent # 03611144 - 0005-0009


Made in Vancouver, Canada

Vancouver  
[sales@bocci.com](mailto:sales@bocci.com)  
[www.bocci.com](http://www.bocci.com)

Berlin  
[europe@bocci.com](mailto:europe@bocci.com)  
[www.bocci.com](http://www.bocci.com)

approx 1.4kg (3lb)






1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Connect the black wire to live wire and white wire to neutral wire.


Note: Standard junction boxes are not compatible with the 87s. The surface mounted light back plate mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

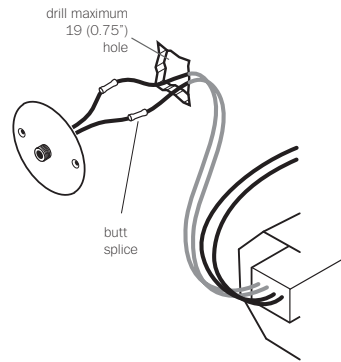

2

Drill a maximum 19mm (0.75") diameter hole.

Join power supply wiring to back plate wiring using #16 butt splices, provided (stagger the splices).




3

Tuck wiring into wall opening and affix the back plate with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.


**Turn power to fixture on.**

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.



4

Screw the diffuser to the back plate.



5

Insert the diffuser cap


WALL LIGHT

87s

Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS


© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**

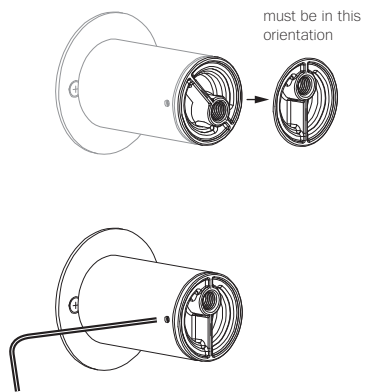


6

Rotate the diffuser cap so it is upright. See diagram above.  
Tighten set screws to secure the position of the diffuser cap.

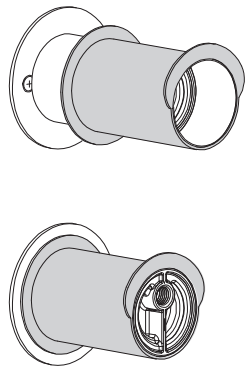

7

Slide the silicone pad onto the diffuser.

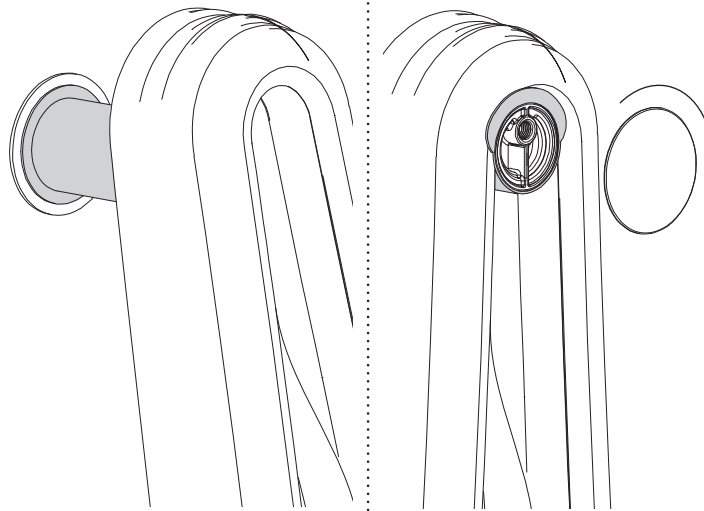


8

Gently rest pendant on to the diffuser.

9

Tighten the end cap to secure the pendant

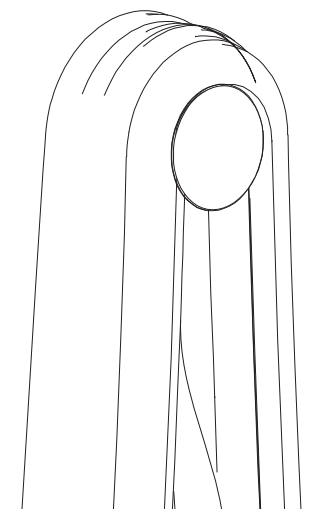

10

Clean fingerprints from surfaces.

For additional assistance,  
please contact Bocci:

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

Worldwide patents pending  
EU Patent # 03611144 - 0005-0009

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE  
E476186

WALL LIGHT

87s

Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**