




COLONNE PENDANT H. 100

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET

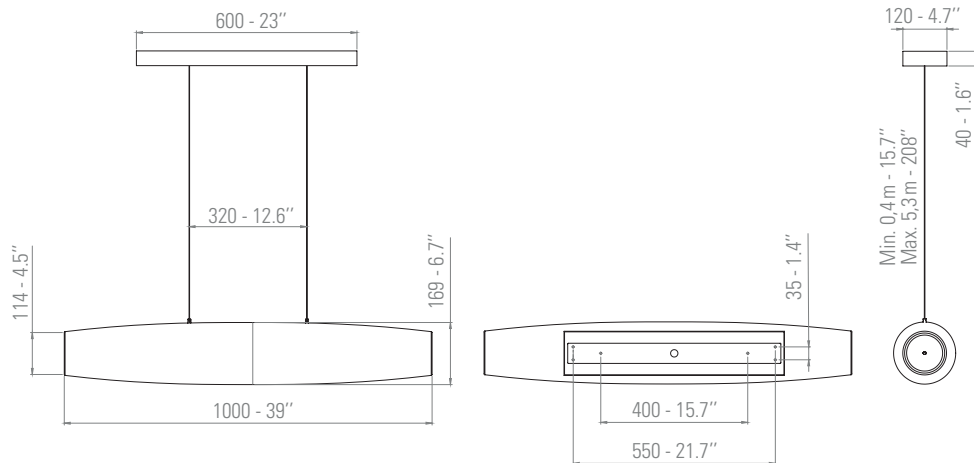

SUSPENSION

PENDANT LAMP

Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
4,5 kg

Emballage
Packaging
1075 x 240 x 300 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

36W

Source
Source

LED intégrée 2700 K, gradable TRIAC
Integrated LED 2700 K, dimmable TRIAC

Lumens
Lumens output

5400lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

Longueur: 5 m
Length: 5 m




Interrupteur
Switch

NA

Fiches
Plug

NA



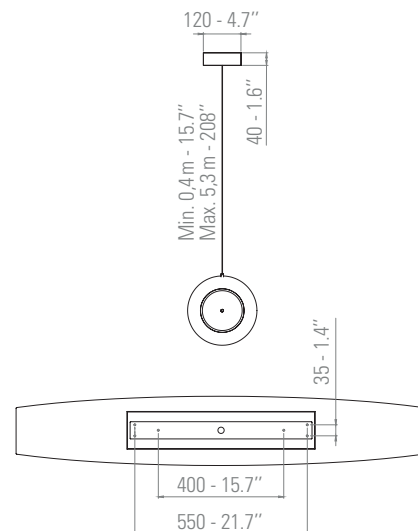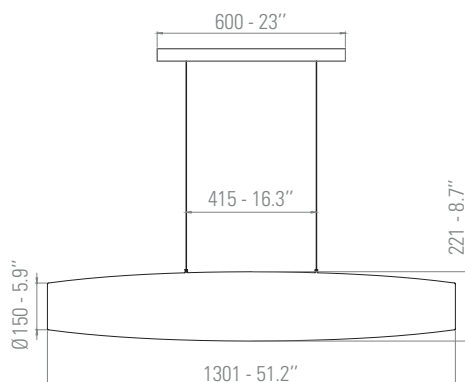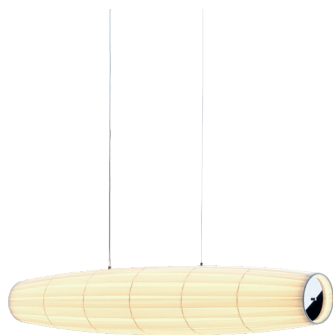

COLONNE PENDANT H. 130

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET




SUSPENSION

PENDANT LAMP

Matériaux	Taffetas de polyester, aluminium, acier
Materials	Polyester taffetas, aluminium, steel
Poids net	5 kg
Net weight	
Emballage	1395 × 300 × 360 mm
Packaging	
IP	20
IP	

Tension	230V (110V pour la version CETL)
Voltage	230V (110V for CETL version)
Classe	1
Class	
Watt	44W
Watt	
Source	LED intégrée 2700 K, gradable TRIAC
Source	Integrated LED 2700 K, dimmable TRIAC
Lumens	6600 lm
Lumens output	
Driver	Driver interne fourni
	Gradable TRIAC intégré 60W / 2,5A / 24V
	Option DALI ou CASAMBI sur demande
Driver	Integrated driver supplied
	TRIAC dimmable 60W / 2.5A / 24V
	DALI or CASAMBI option on request
Câble	Longueur: 5 m
Wire	Length: 5 m
Interrupteur	NA
Switch	
Fiches	NA
Plug	



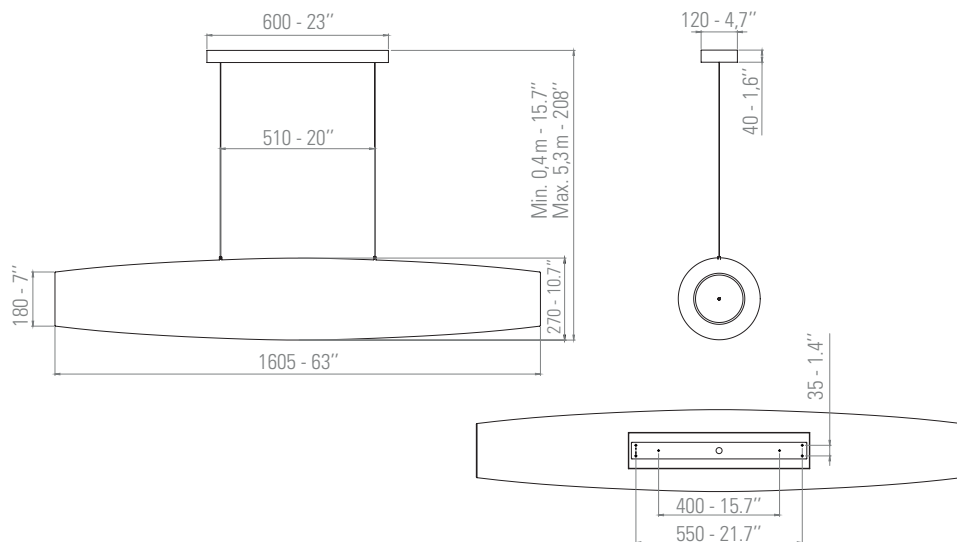

COLONNE PENDANT H. 160 de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



SUSPENSION

PENDANT LAMP

Matériaux	Taffetas de polyester, aluminium, acier
Materials	Polyester taffetas, aluminium, steel
Poids net	6 kg
Net weight	
Emballage	1715 × 360 × 420 mm
Packaging	
IP	20
IP	

Tension	230V (110V pour la version CETL)
Voltage	230V (110V for CETL version)
Classe	1
Class	
Watt	52W
Watt	
Source	LED intégrée 2700K, gradable TRIAC
Source	Integrated LED 2700K, dimmable TRIAC
Lumens	7800lm
Lumens output	
Driver	Driver interne fourni
	Gradable TRIAC intégré 60W / 2,5A / 24V
	Option DALI ou CASAMBI sur demande
Driver	Integrated driver supplied
	TRIAC dimmable 60W / 2.5A / 24V
	DALI or CASAMBI option on request
Câble	Longueur: 5 m
Wire	Length: 5m
Interrupteur	NA
Switch	
Fiches	NA
Plug	

