
<u>orluna</u>

cero origin





cero origin

circular product

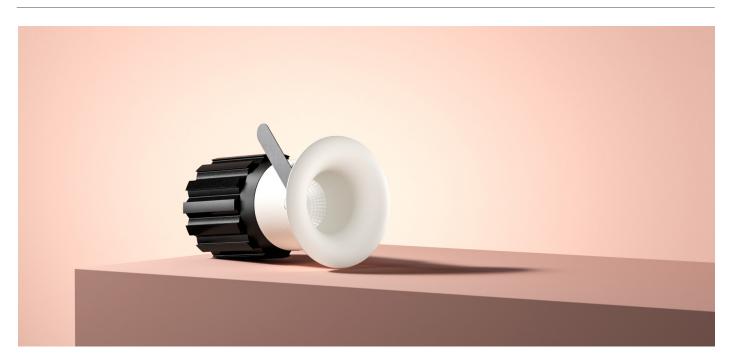








cero origin

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us. 1

3

The fully repaired and tested product enters back into our stock—with a brand new warranty.

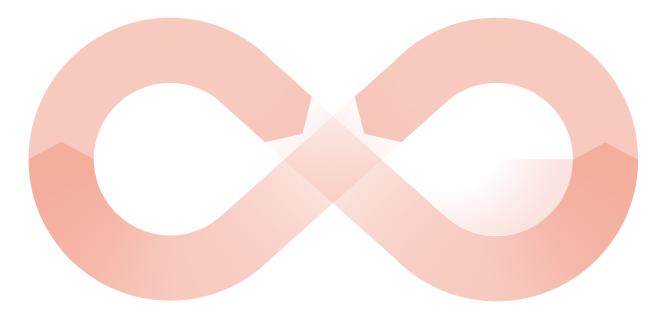

The 'new' light fitting is despatched to a new customer.

4

2

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.








cero origin

circular product

		2700K							
		SOFT							
LIGHT VALUES	Beam Width FWHM Initial Lumens Engine Lumens Luminaire Lumens Engine Lm/W Luminiare Cd	Medium 32° 478 379 306 71 786		Wide 36° 478 385 308 73 650		Flood 42° 478 379 286 71 455			
POWER	Voltage Drive Current Circuit Power (typ)								

		3000K						
		SOFT						
LIGHT VALUES		Medium		Wide		Flood		
	Beam Width FWHM	32°		37°		42°		
	Initial Lumens	514		514		514		
	Engine Lumens	403		399		392		
	Luminaire Lumens	324		320		296		
	Engine Lm/W	76		75		74		
	Luminiare Cd	826		667		465		
POWER	Voltage Drive Current Circuit Power (typ)			17.6V 300mA 5.3W				

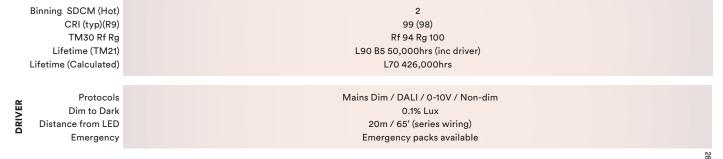

SPECIFICATION CODE

OR - CER - 27

27/2700K
30/3000K

M / Mains Dim
D / DALI
0 / 0-10v
N / Non Dim
X / No Driver

Driver

M / Medium
W / Wide
F / Flood

Bezel Colour

W / White RAL 9010

W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass K / Brushed Chrome L / Polished Chrome L / Polished Chrome 54 E

F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa E / 3hr Emergency Z / LSZH Cable

*NOTE: Fire Hood if used with constant torsion springs

⊖rluna