Cabildo Wall LED 2700K
Eric Solè

IP20 ⏚ EAC CCC CE ● Dimmerable: +◐-

DESCRIPTION

The indirect light shapes the body lamp, bringing out its winding form and giving it the astonishing appearance of a ring of light. Wall support and body lamp in painted die-cast aluminium.

410   200   190
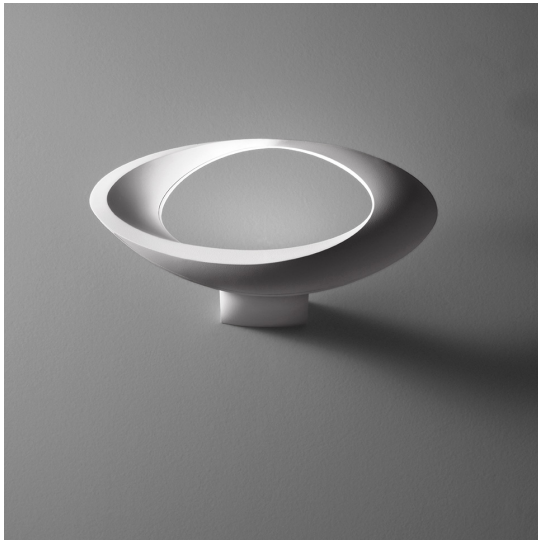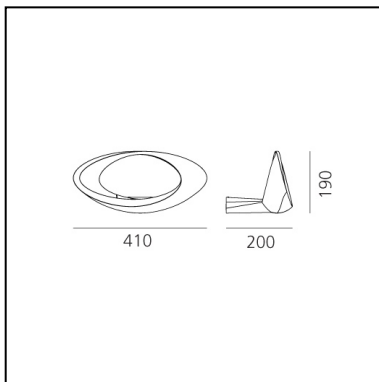
LUMINAIRE

– Watt: **28W**
– Voltage: **220-240V**
– Delivered lumen output: **1996lm**
– CCT: **2700K**
– Efficiency: **73%**
– Efficacy: **71.29lm/W**
– CRI: **95**
– Dimmable Typology: **Push**

Notes

Lamp included.

FEATURES

– Product Code: **1181W10A**
– Colour: **White**
– Installation: **Wall**
– Material: **Aluminium**
– Series: **Design Collection**
– Environment: **Indoor**
– Area contract: **Residential**
– Emission: **Indirect Diffused**
– design by: **Eric Solè**

DIMENSIONS

– Length: **200 mm**
– Width: **410 mm**
– Height: **190 mm**
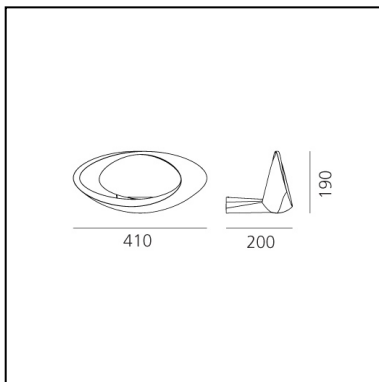– Glow Wire Test: **750°**

SOURCES INCLUDED

– Category: **Led**
– Number: **1**
– Watt: **28W**
– Delivered lumen output: **2990lm**
– Color temperature (K): **2700K**
– CRI: **90**
– Color Tolerance: **MacAdam 2SDCM**

We reserve the right to change our product specifications. — Last update: August 2023
Please visit www.artemide.com for the latest product information

Artemide

Cabildo Wall LED 3000K
Eric Solè

IP20 ⏚ 〖EAC〗 ⓒⓒⓒ CE ● Dimmerable: +◐−

410   200   190

DESCRIPTION

The indirect light shapes the body lamp, bringing out its winding form and giving it the astonishing appearance of a ring of light. Wall support and body lamp in painted die-cast aluminium.

FEATURES

– Product Code: **1181010A**
– Colour: **White**
– Installation: **Wall**
– Material: **Aluminium**
– Series: **Design Collection**
– Environment: **Indoor**
– Area contract: **Residential**
– Emission: **Indirect Diffused**
– design by: **Eric Solè**

LUMINAIRE

– Watt: **28W**
– Voltage: **220-240V**
– Delivered lumen output: **2137lm**
– CCT: **3000K**
– Efficiency: **73%**
– Efficacy: **76.32lm/W**
– CRI: **95**
– Dimmable Typology: **Push**

Notes

Lamp included.

DIMENSIONS

– Length: **200 mm**
– Width: **410 mm**
– Height: **190 mm**
– Glow Wire Test: **750°**

SOURCES INCLUDED

– Category: **Led**
– Number: **1**
– Watt: **28 W**
– Delivered lumen output: **3200lm**
– Color Rendering: **90**
– Color temperature (K): **3000K**
– Color Tolerance: **MacAdam 2SDCM**

Artemide