


IN FINE 650 WALL

Gaëlle Lauriot-Prévost & Dominique Perrault



Finition Corps Body Finishing

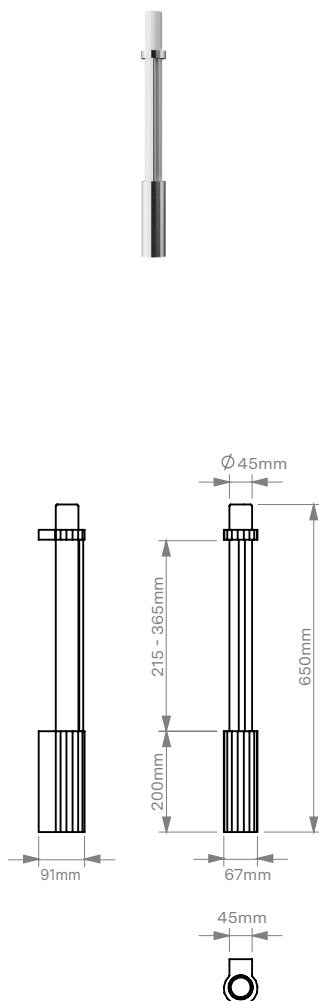

Finition Verre Glass Finishing



DCW Refs DCW Refs

IN FINE 650 W 2700K SIL	3700677667793
IN FINE 650 W 2700K DG	3700677667809
IN FINE 650 W 2700K WH	3700677667816
IN FINE 650 W 2700K RED	3700677667823
CASAMBI CBU-TED CONTROLLER	3700677662293
TRIAC TO DALI CONVERTER	3700677662866
IN FINE 650 W COVER PLATE SIL	3700677667588
IN FINE 650 W COVER PLATE DG	3700677667595
IN FINE 650 W COVER PLATE WH	3700677667601
IN FINE 650 W COVER PLATE RED	3700677667618

Typologie Typology

Tension Voltage

Indice de protection Protection index

Classe Class

Puissance Power

Source Lumineuse Light Source

Température de couleur Color Temperature

Flux Lumineux Light Flux

Driver Light Flux

Gradation Dimming

Interrupteur Switch

Matériaux Materials

Poids Net Net Weight

Poids Brut Gross Weight

Emballage Packaging

Marquages Marks

EPREL EPREL

Options Options

Applique Wall lamp

220-240V

IP65

2

12W

LED intégrée - remplaçable
Integrated LED - replaceable

2700K

1200lm (valeur nominale)
1200lm (nominal value)

Intégré - CC - 200mA - 82×30×20mm
Integrated - CC - 200mA - 82×30×20mm

Oui, TRIAC
Yes, TRIAC

Non
No

Aluminium, verre
Aluminum, glass

1,4kg
3,1lbs

2.8kg
6.2lbs

330×120×730mm
(13×4.7×28.7in)

CE UK
CA

2589112

Plaque d'ornement
Cover plate


CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur
DALI with converter



IN FINE 1050 WALL

Gaëlle Lauriot-Prévost & Dominique Perrault

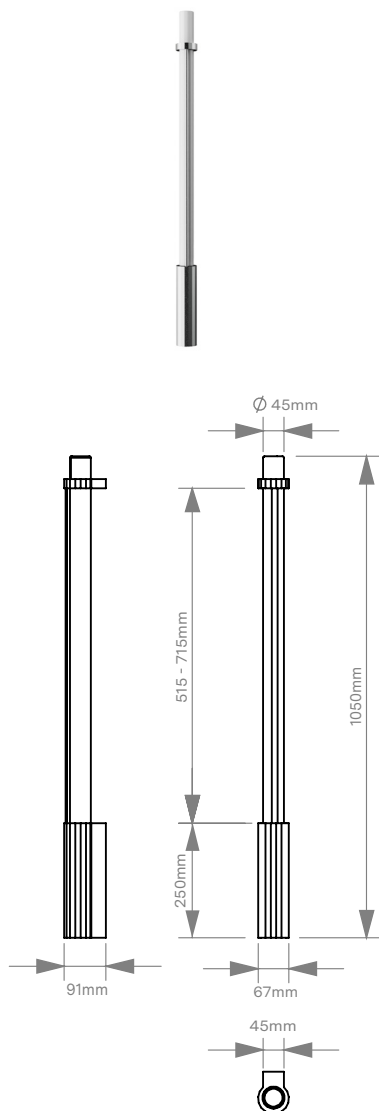

Typologie
Typology

Applique
Wall lamp

Tension
Voltage

220-240V

Indice de protection
Protection index

IP65

Classe
Class

2

Puissance
Power

15W

Source Lumineuse
Light Source

LED intégrée - remplaçable
Integrated LED - replaceable

Température de couleur
Color Temperature

2700K

Flux Lumineux
Light Flux

1500lm (valeur nominale)
1500lm (nominal value)

Driver
Light Flux

Intégré - CC - 350mA - 82×30×20mm
Integrated - CC - 350mA - 82×30×20mm

Gradation
Dimming

Oui, TRIAC
Yes, TRIAC

Interrupteur
Switch

Non
No

Matériaux
Materials

Aluminium, verre
Aluminum, glass

Poids Net
Net Weight

2,1kg
4,6lbs

Poids Brut
Gross Weight

3,8kg
8,4lbs

Emballage
Packaging

330×120×1130mm
(13×4,7×44.5in)

Marquages
Marks



EPREL
EPREL

2589113

Options
Options

Plaque d'ornement
Cover plate


CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur
DALI with converter

Finition Corps
Body Finishing



Finition Verre
Glass Finishing




DCW Refs
DCW Refs

IN FINE 1050 W 2700K SIL	3700677667755
IN FINE 1050 W 2700K DG	3700677667762
IN FINE 1050 W 2700K WH	3700677667779
IN FINE 1050 W 2700K RED	3700677667786
CASAMBI CBU-TED CONTROLLER	3700677662293
TRIAC TO DALI CONVERTER	3700677662866
IN FINE 1050 W COVER PLATE SIL	3700677667540
IN FINE 1050 W COVER PLATE DG	3700677667557
IN FINE 1050 W COVER PLATE WH	3700677667564
IN FINE 1050 W COVER PLATE RED	3700677667571



IN FINE 1600 WALL

Gaëlle Lauriot-Prévost & Dominique Perrault

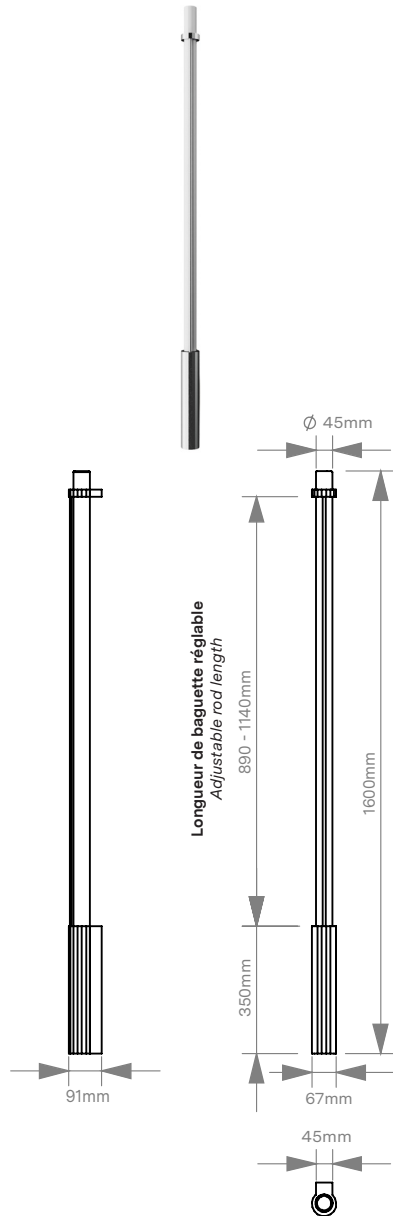

Finition Corps Body Finishing



Les finitions sont compatibles avec une installation en bord de mer.
The finishings are suitable for coastal environments.

Finition Verre Glass Finishing



DCW Refs DCW Refs

IN FINE 1600 W 2700K SIL	3700677667717
IN FINE 1600 W 2700K DG	3700677667724
IN FINE 1600 W 2700K WH	3700677667731
IN FINE 1600 W 2700K RED	3700677667748
CASAMBI CBU-TED CONTROLLER	3700677662293
TRIAC TO DALI CONVERTER	3700677662866
IN FINE 1600 W COVER PLATE SIL	3700677667502
IN FINE 1600 W COVER PLATE DG	3700677667519
IN FINE 1600 W COVER PLATE WH	3700677667526
IN FINE 1600 W COVER PLATE RED	3700677667533

Typologie Typology

Tension Voltage

Indice de protection Protection index

Classe Class

Puissance Power

Source Lumineuse Light Source

Température de couleur Color Temperature

Flux Lumineux Light Flux

Driver Light Flux

Gradation Dimming

Interrupteur Switch

Matériaux Materials

Poids Net Net Weight

Poids Brut Gross Weight

Emballage Packaging

Marquages Marks

EPREL EPREL

Options Options

Applique Wall lamp

220-240V

IP65

2

30W

LED intégrée - remplaçable
Integrated LED - replaceable

2700K

3000lm (valeur nominale)
3000lm (nominal value)

Intégré - CV - 12V - 260×30×18,5mm
Integrated - CV - 12V - 260×30×18,5mm

Oui, TRIAC
Yes, TRIAC

Non
No

Aluminium, verre
Aluminum, glass

2,8kg
6,2lbs

4,3kg
9,5lbs

330×120×1690mm
(13×4,7×66.5in)

CE UK
CA

2589114

Plaque d'ornement
Cover plate

CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur
DALI with converter

