\vee | 3 | \wedge

4695

Design By Martín Azúa

Dots Outdoor beacon. Minimalist and compact, Dots Outdoor is integrated in outdoor spaces thanks to its natural tones. It can be installed individually or in clusters, and radiates a gentle circle of ambient directed light.

Model Sheet





ø 20 cm

Finish	53 Green M1 NCS S 6005-G80Y
	25 Beige D1 NCS S 4005-Y50R
	22 Graphite Black NCS S 8000-N
LED temperature color	2700 К
Materials	Body: Aluminum Diffuser: Polycarbonate LED support: Aluminum
Light source	1 x LED STRIP 7,8W 350mA
LED	CRI>90 750.2 lm 96,18 2700 K
Driver	Constant Current 350 100~277 V V 50~60 Hz HZ
	LED [IP65] Multi-volt 50-60Hz
Application	Outdoor lamps
Packaging	1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.4 Net weigth 2.7 Vol. 0.0145

General Lighting Reduced-height outdoor lamp to shade light on the ground.

Lighting effect



Photometric Data

Efficiency Coordinate System

Total Flux Maximum Value 18.38 lm/W CG 144.56 lm 113.17 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

12 cm

Vibia Lighting, S.L.U.

Office / Oficina Progrés 4-6. 08850 Gavà. Barcelona, Spain. International T +34 934 796 971 Spain / Portugal T +34 934 796 970 customer.service@vibia.com vibia.com

\vee | 3 | \wedge

4697

Design By Martín Azúa

Dots Outdoor beacon. Minimalist and compact, Dots Outdoor is integrated in outdoor spaces thanks to its natural tones. It can be installed individually or in clusters, and radiates a gentle circle of ambient directed light.

Model Sheet





ø 15 cm

LED temperature 2700 K color Surface Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 4,6W 350mA F LED CRI>90 375.9 lm 96,33 2700 K Driver Constant Current 350 100~240 V V 50~60 Hz HZ ↓ LED IP65 Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5 Vol. 0.0062	Finish	 25 Beige D1 NCS S 4005-Y50R 53 Green M1 NCS S 6005-G80Y 22 Graphite Black NCS S 8000-N
Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 4,6W 350mA F LED CRI>90 375.9 lm 96,33 Driver Constant Current 350 100~240 V V 50~60 Hz HZ LED IP65 Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5		2700 K
Light source 1 x LED STRIP 4,6W 350mA F LED CRI>90 375.9 lm 96,33 2700 K Driver Constant Current 350 100-240 V V 50-60 Hz HZ () LED IP65 Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	Instalation type	Surface
F LED CRI>90 375.9 lm 96,33 2700 K Driver Constant Current 350 100~240 V V 50~60 Hz HZ LED IP65 Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	Materials	
2700 K Driver Constant Current 350 100~240 V V 50~60 Hz HZ () [IP65] Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	Light source	
V V 50~60 Hz HZ LED IP65 Bi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	LED	
50-60Hz Application Outdoor lamps Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	Driver	Constant Current 350 100~240 V V 50~60 Hz HZ
Packaging 1 Box 0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5		
0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5	Application	Outdoor lamps
	Packaging	0.13 m x 0.2 m x 0.24 m Gross weigth 1.9 Net weigth 1.5

Lighting effect

General Lighting Reduced-height outdoor lamp to shade light on the ground.



Photometric Data

19.87 lm/W CG 77.77 lm 63.15 cd

Other Applications

Efficiency Coordinate System

Total Flux Maximum Value





9 cm

Vibia Lighting, S.L.U.

Office / Oficina Progrés 4-6. 08850 Gavà. Barcelona, Spain.

4700

Design By Martín Azúa

Dots is an outdoor beacon easily integrated in any garden or patio thanks to its finishes in natural tones. It can be installed individually or in clusters, and radiates a gentle circle of ambient light at 360°, like a bright crown.

Model Sheet





ø 20 cm

53 Green M1 NCS S 6005-G80Y 22 Graphite Black NCS S 8000-N LED temperature color 2700 K Instalation type Surface Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 14,8W 350mA F LED LED CRI>90 1445 lm 103,63 2700 K Driver Constant Current 350 100-277 V V 50~60 Hz HZ LED IP65 Multi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1 Vol. 0.0145 	Finish	25 Beige D1 NCS S 4005-Y50R
LED temperature color 2700 K Instalation type Surface Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 14,8W 350mA F LED LED CRI>90 1445 lm 103,63 2700 K Driver Constant Current 350 100-277 V V 50~60 Hz HZ IED LED IP65 Multi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box O.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1		
color Instalation type Surface Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 14,8W 350mA F Isolar Carrow LED CRI>90 1445 lm 103,63 2700 K Driver Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V V 50~60 Hz HZ Image: Constant Current 350 100-277 V S0~60 Hz HZ Image: Constant Current 350 100-277 V S0~60 Hz HZ Image: Constant Current 350 100-277 V S0~60 Hz HZ Image: Constant Current 350 100-277		22 Graphite Black NCS S 8000-N
Materials Body: Aluminum Diffuser: Polycarbonate Light source 1 x LED STRIP 14,8W 350mA F Ix LED STRIP 14,8W 350mA LED CRI>90 1445 Im 103,63 2700 K Driver Constant Current 350 100~277 V V 50~60 Hz HZ Image: Constant Current 350 100~277 Driver Constant Current 350 100~277 Image: Constant Current 350 100~277 Driver Constant Current 350 100~277 Image: Constant Current 350 100~277 Constant Current 350 100~277 Driver Constant Current 350 100~277 Image: Constant Current 350 100~277 Driver Constant Current 350 100~277 Image: Constant Current 350 100~277 Driver Constant Current 350 100~277 Driver Constant Current 350 100~277 Driver Constant Current 350 100~277 Image: Constant Current 350 100~277 Driver Image: Constant Current 350 100~277<		2700 К
Diffuser: Polycarbonate Light source 1 x LED STRIP 14,8W 350mA F LED CRI>90 1445 lm 103,63 2700 K Driver Constant Current 350 100~277 V V 50~60 Hz HZ LED IP65 Multi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	Instalation type	Surface
F LED CRI>90 1445 lm 103,63 2700 K Driver Constant Current 350 100~277 V V 50~60 Hz HZ LED IP65 Multi-volt 50-60 Hz Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	Materials	
2700 K Driver Constant Current 350 100~277 V V 50~60 Hz HZ () [IP65] Multi-volt 50-60Hz Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	Light source	
V V 50~60 Hz HZ () LED [IP65 [Multi-volt] 50-60Hz Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	LED	
Application Outdoor lamps Packaging 1 Box 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	Driver	Constant Current 350 100~277 V V 50~60 Hz HZ
Packaging 0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1		
0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1	Application	Outdoor lamps
	Packaging	0.18 m x 0.27 m x 0.3 m Gross weigth 3.8 Net weigth 3.1

Lighting effect

General Lighting Reduced-height outdoor lamp to shade light on the ground.



Photometric Data

25.41 lm/W CG 341.12 lm 107.61 cd

 $\setminus | \exists | \land$


Other Applications

Efficiency Coordinate System

Maximum Value

Total Flux





12 cm

Vibia Lighting, S.L.U.

Office / Oficina Progrés 4-6. 08850 Gavà. Barcelona, Spain. International T +34 934 796 971 Spain / Portugal T +34 934 796 970 customer.service@vibia.com vibia.com

4702

Design By Martín Azúa

Dots is an outdoor beacon easily integrated in any garden or patio thanks to its finishes in natural tones. It can be installed individually or in clusters, and radiates a gentle circle of ambient light at 360°, like a bright crown.


/|3|/

22.56 lm/W CG

269.58 lm

83.73 cd

Model Sheet

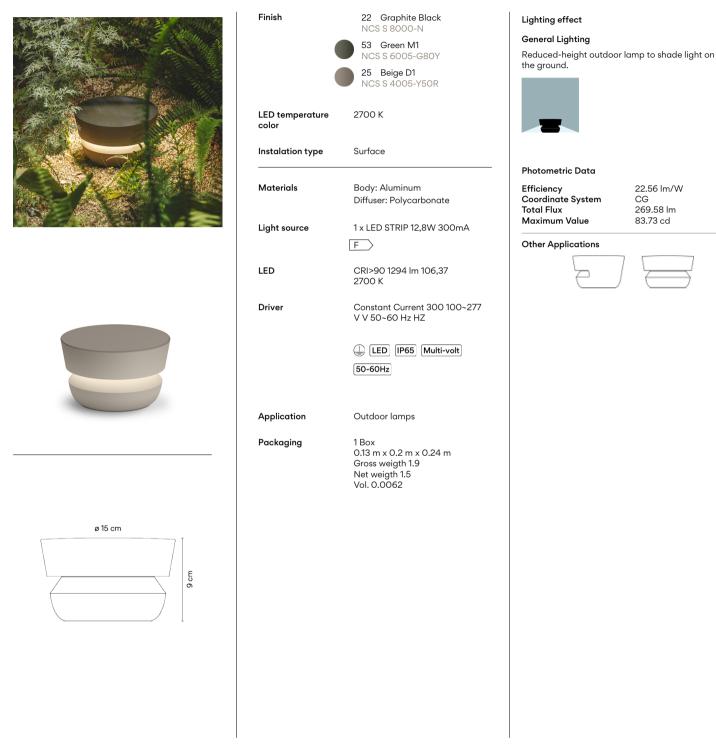

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina Progrés 4-6. 08850 Gavà. Barcelona, Spain.