


Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Energy class light source	F
Light source	SMD LED
Light source included	Yes
Luminous Flux (lm)	136
Color temperature (K)	3000K
CRI	>80
Switch type	On/Off
Cable length	4300 mm
Structure material	Steel
Diffuser material	PMMA
Structure finish	Matt Black+Matt Gold
Diffuser finish	Opal

↓ Installation instructions

↓ Energy label

↓ Photometric

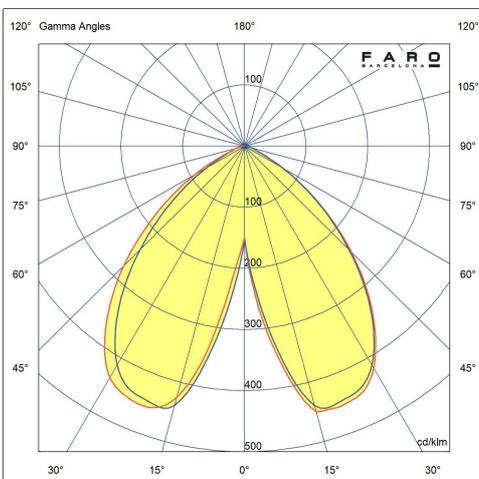

Related accessories



Tider Cable Management Accessory

Reference	20546
Structure material	TPU



