





DRIVER BOX

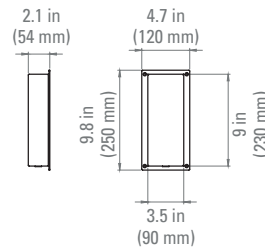

ITT 360° US 1000

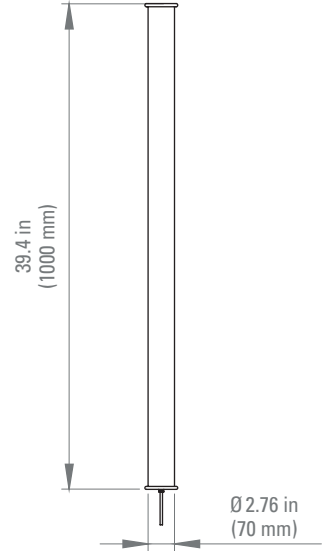

IN THE TUBE 360° - 1000

by Dominique Perrault & Gaëlle Lauriot-Prévost

TECHNICAL SHEET

North America standards

FICHE TECHNIQUE

normes Nord Américaines



WALL & PENDANT LAMP APPLIQUE & SUSPENSION

| | |
|------------------|---|
| Materials | Tube: borosilicate glass Waterproof stopper: black silicon and aluminium cast Adjustable collar: stainless steel Removable mesh: no mesh, gold or silver finish Fastenings: stainless steel Wire: black rubber |
| Matériaux | Tube: verre borosilicate Bouchon étanche: silicone et fonte d'aluminium noirs Collier de fixation: acier inoxydable Maille amovible: finitions doré, argenté ou sans maille Visserie: acier inoxydable Câble: caoutchouc noir |

Net weight **3 kg**
Poids net

Use **Indoor / outdoor / bathroom**
Usage Intérieur / extérieur / salle de bain

Packaging **7.48 x 7.48 x 53.54 in**
Emballage 190 x 190 x 1360 mm

IP IP **65**

IK IK **07**

| | |
|-----------------------------|--|
| Voltage | 110V |
| Tension | |
| Class | 1 |
| Classe | |
| Watt | 18W |
| Watt | |
| Source | LED INTEGRATED 2700K |
| Source | |
| Lumens output | 570lm (with mesh) |
| Lumens | 570lm (avec maille) |
| Driver | Driver supplied (7x2.36x1.37 in) |
| Driver | TRIAC dimmable 500 mA / 30W Driver fourni (180x60x35mm) Dimmable TRIAC 500 mA / 30W |
| Wire | Black rubber, length : 118in |
| Câble | Caoutchouc noir, longueur : 3m |
| Accessories included | 2 Adjustable collars are included |
| Accessoires fournis | 2 Colliers de fixations fournis |
| Switch | NA |
| Interrupteur | |
| Plug | NA |
| Fiches | |

MESHES MAILLES



Silver

SIL



Gold

GOLD

IN THE TUBE 360° - 1000

by Dominique Perrault & Gaëlle Lauriot-Prévost

TECHNICAL SHEET
North America standards

FICHE TECHNIQUE
normes Nord Américaines

PHOTOMETRIC DATA DONNÉES PHOTOMÉTRIQUES

Flux **570lm**
(with mesh · avec maille)

Tc

CRI

