

FOCUS X3

de Yuji Okitsu

FICHE TECHNIQUE TECHNICAL SHEET



SUSPENSION

PENDANT LAMP

Matériaux Aluminium, PMMA
Materials Aluminium, PMMA

Poids net 3,3 kg
Net weight

Emballage 495 x 150 x 870 mm
Packaging

IP 20
IP

Tension 220-240V
Voltage

Classe 2
Class

Watt 20,4W
Watt

Source LED intégrée 2700K, gradable
Source Integrated LED 2700K, dimmable

Lumens 2040 lm
Lumens output

Driver Driver fourni intégré (137x50x15,5 mm)
1000 mA / 24V
Driver Integrated driver supplied (137x50x15,5 mm)
1000 mA / 24V

Câble Longueur: 3 m
Dans un lieu sujet à courants d'air ou ventilation, il est nécessaire de laisser une distance minimum de 20 cm entre le canopy et le mobile, et de ne pas tendre le câble d'alimentation.

Wire Length: 3m
In an environment with drafts or ventilation, a minimum distance of 20cm must be left between the canopy and the mobile, and the power cable must not be stretched.

Interrupteur NA
Switch

Fiches NA
Plug

FINITIONS FINISHES




Black

BL



White

WH

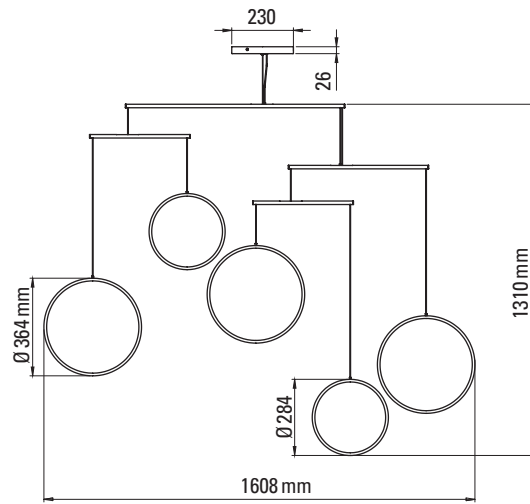

FOCUS X5

de Yuji Okitsu

FICHE TECHNIQUE TECHNICAL SHEET



SUSPENSION

PENDANT LAMP

Matériaux Materials	Aluminium, PMMA Aluminium, PMMA
Poids net Net weight	4,2 kg
Emballage Packaging	1330 x 200 x 480 mm
IP IP	20

Tension Voltage	220-240V
Classe Class	2
Watt Watt	31,8W
Source Source	LED intégrée 2700K, gradable Integrated LED 2700K, dimmable
Lumens Lumens output	3180 lm
Driver Driver	Driver fourni intégré (170x57x18 mm) 1500 mA / 24V Integrated driver supplied (170x57x18 mm) 1500 mA / 24V
Câble Wire	Longueur: 3 m <i>Dans un lieu sujet à courants d'air ou ventilation, il est nécessaire de laisser une distance minimum de 20 cm entre le canopy et le mobile, et de ne pas tendre le câble d'alimentation.</i> Length: 3 m <i>In an environment with drafts or ventilation, a minimum distance of 20 cm must be left between the canopy and the mobile, and the power cable must not be stretched.</i>
Interrupteur Switch	NA
Fiches Plug	NA

FINITIONS FINISHES

