

PANZERI

Gonio

220-240V AC dimmable (DALI/Push DIM)

A01901.030.0502

● white



Data sheet


CODE	A01901.030.0502
SYSTEM POWER CONSUMPTION	26W
EFFICACY	83.38lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 72.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	asymmetric
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3120lm
LUMEN OUTPUT	2168lm
EFFICIENCY	69.5%
WEIGHT	1,08 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	19,5 x 35,0 x 10,0 cm




Wall lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal wall bracket in polyacrylic paint.
Extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Extruded acrylic diffusers with opaline finish.
Die-cast aluminium end caps in polyacrylic paint.



Technical drawing

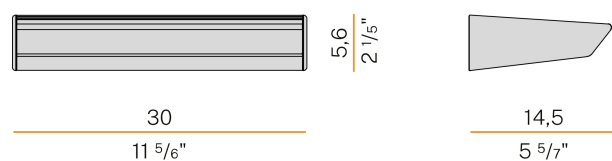

Polar diagram

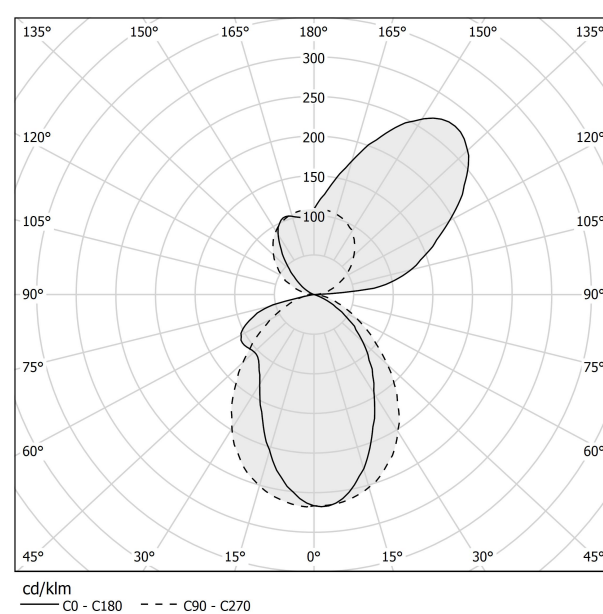

PANZERI

Gonio

220-240V AC dimmable (DALI/Push DIM)

A01901.060.0502

● white



Data sheet


CODE	A01901.060.0502
SYSTEM POWER CONSUMPTION	50W
EFFICACY	86.74lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 72.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	asymmetric
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6240lm
LUMEN OUTPUT	4337lm
EFFICIENCY	69.5%
WEIGHT	2,05 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,5 x 63,0 x 12,5 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal wall bracket in polyacrylic paint.
Extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Extruded acrylic diffusers with opaline finish.
Die-cast aluminium end caps in polyacrylic paint.



Technical drawing

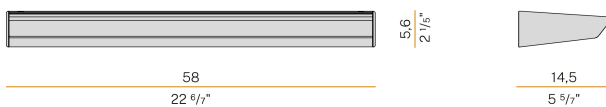

Polar diagram

