

erluna

**infinity midi
fixed
origin**

circular product





IP65
IP54



UK
CA

infinity midi fixed origin

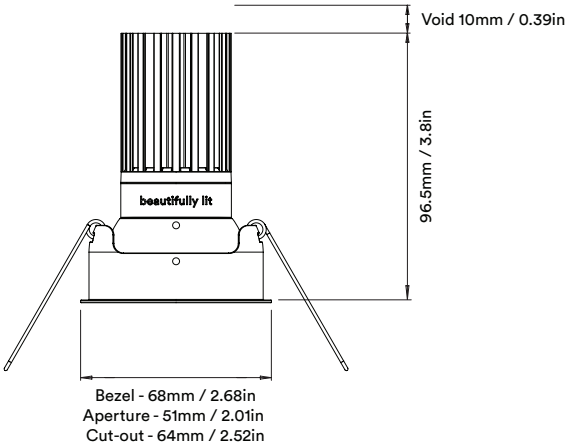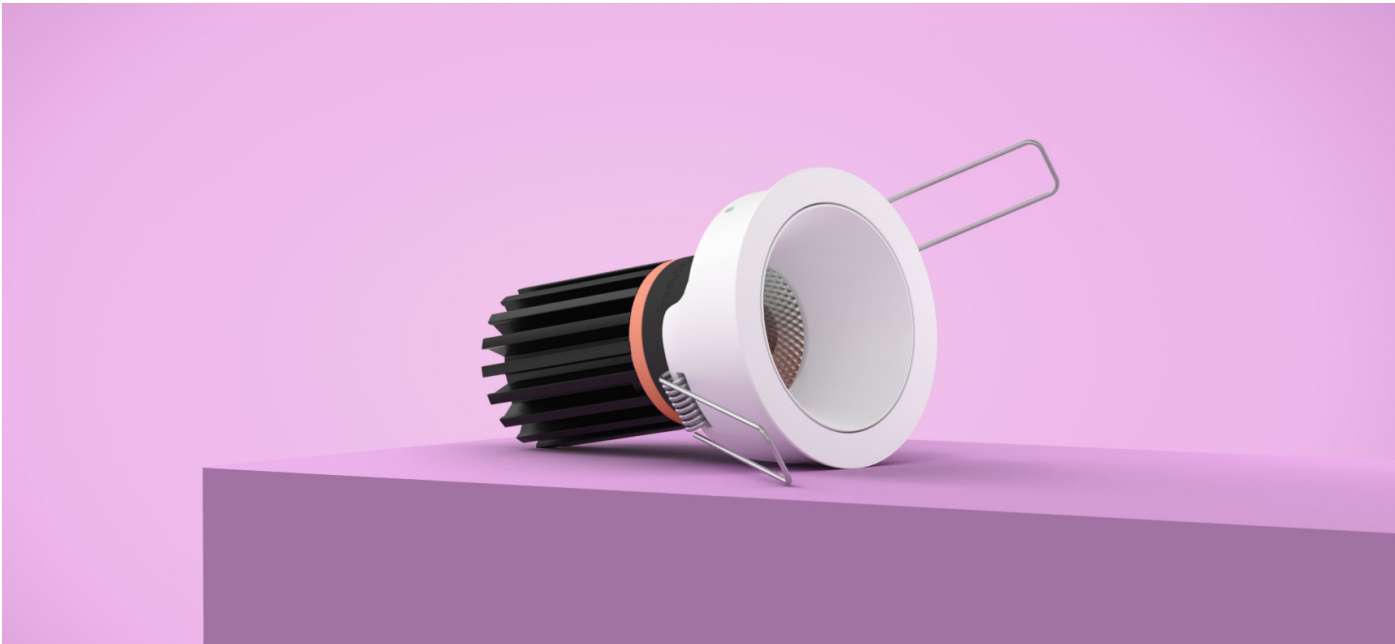


infinity midi fixed origin

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

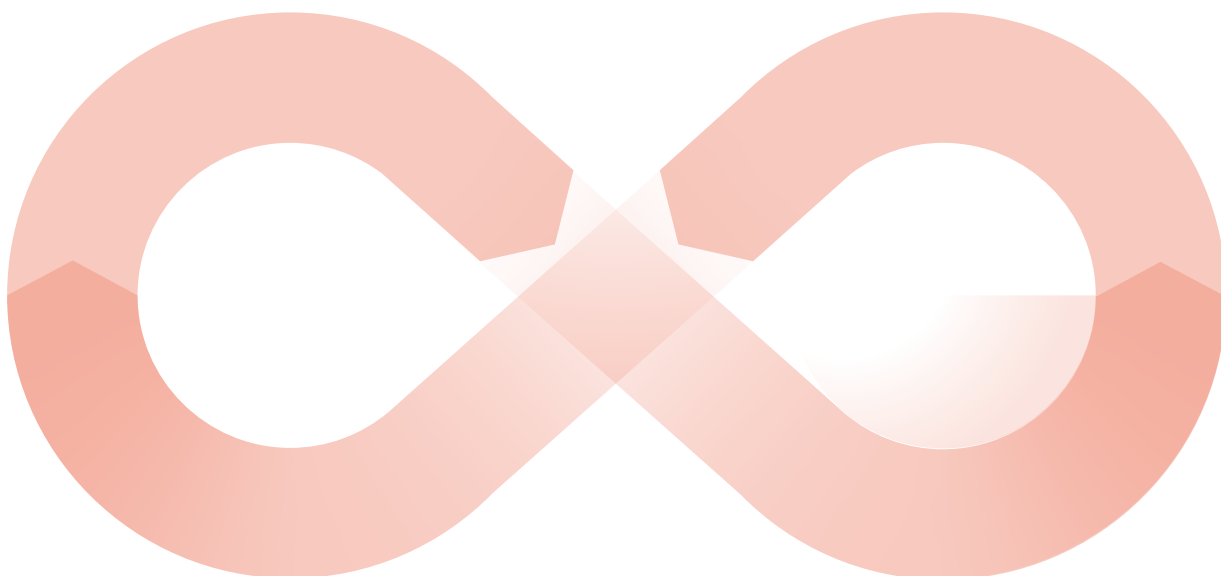

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna

infinity midi fixed origin

circular product

		2700K				
		SOFT				
LIGHT VALUES	Beam Width FWHM	Spot	Narrow	Medium	Wide	Flood
	Source Lumens	12°	18°	24°	37°	45°
	Engine Lumens	925	925	925	925	925
	Luminaire Lumens	358	687	724	731	732
	Source Lm/CW *1	329	609	669	685	682
	Luminaire Lm/CW *2	95	95	95	95	95
	Luminaire Cd	34	63	69	71	70
	Luminaire Cd	4190	4496	3583	1785	1244
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

		3000K				
		SOFT				
LIGHT VALUES	Beam Width FWHM	Spot	Narrow	Medium	Wide	Flood
	Source Lumens	12°	18°	24°	37°	45°
	Engine Lumens	988	988	988	988	988
	Luminaire Lumens	382	734	773	781	782
	Source Lm/CW *1	351	650	715	732	729
	Luminaire Lm/CW *2	102	102	102	102	102
	Luminaire Cd	36	67	74	76	75
	Luminaire Cd	4476	4804	3827	1907	1329
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 93.8 Rg 101.9
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Protocols	Mains Dim / DALI / 0-10V / Non-dim
DRIVER	Dim to Dark	0.1% Lux
	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OR	- INXD	27	M	M	- W	- WB	54 H
		27 / 2700K 30 / 3000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	S / Spot N / Narrow M / Medium W / Wide F / Flood	W / White 9010 D / White RAL 9003 C / Other RAL G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass AW / Anodised White 9016 AB / Anodised Black AV / Anodised Bronze AP / Anodised Burnished	WB / White RAL 9010 DB / White RAL 9003 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass AWB / Anodised White 9016 ABB / Anodised Black AVB / Anodised Bronze APB / Anodised Burnished	54 / IP54 65 / IP65 H / Honeycomb Louvre K / Click Connector Z / LSZH Cable E / Emergency F / 60 min Fire Rated