


IRIS CEILING 60

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET

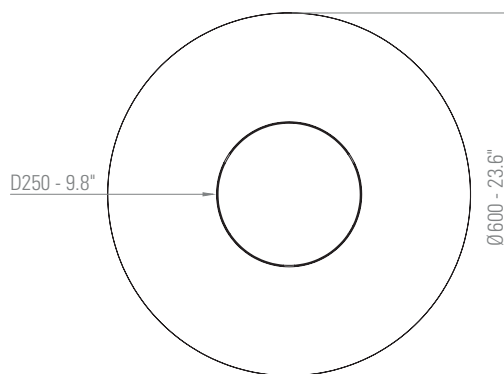

APPLIQUE & PLAFONNIER WALL & CEILING LAMP



Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
2,45 kg

Emballage
Packaging
685 x 150 x 685 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

35W

Source
Source

LED intégrée 2700 K, gradable TRIAC
Integrated LED 2700 K, dimmable TRIAC

Lumens
Lumens output

5250 lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

NA




Interrupteur
Switch

NA

Fiches
Plug

NA



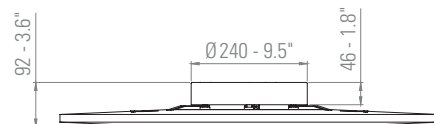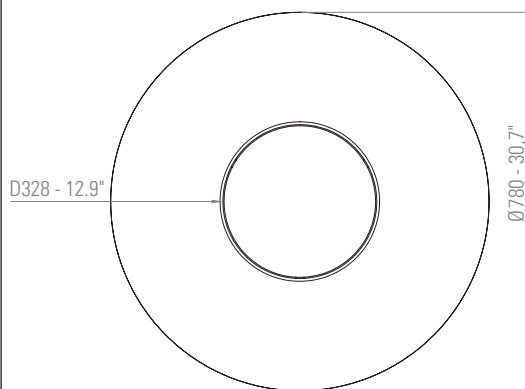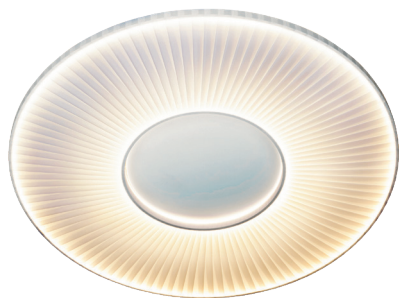

IRIS CEILING 80

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



APPLIQUE & PLAFONNIER WALL & CEILING LAMP



Matériaux	Taffetas de polyester, aluminium, acier
Materials	Polyester taffetas, aluminium, steel
Poids net	3,45 kg
Net weight	
Emballage	875 x 150 x 875 mm
Packaging	
IP	20
IP	

Tension	230V (110V pour la version CETL)
Voltage	230V (110V for CETL version)
Classe	1
Class	
Watt	49W
Watt	
Source	LED intégrée 2700 K, gradable TRIAC
Source	Integrated LED 2700 K, dimmable TRIAC
Lumens	7350 lm
Lumens output	
Driver	Driver interne fourni
	Gradable TRIAC intégré 60W / 2.5A / 24V
	Option DALI ou CASAMBI sur demande
Driver	Integrated driver supplied
	TRIAC dimmable 60W / 2.5A / 24V
	DALI or CASAMBI option on request
Câble	NA
Wire	
Interrupteur	NA
Switch	
Fiches	NA
Plug	

