



IRIS MIRROR 60

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



APPLIQUE & PLAFONNIER WALL & CEILING LAMP

Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
2,45 kg

Emballages
Packagings
685 x 150 x 685 mm
292 x 26 x 292 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

35W

Source
Source

LED intégrée 2700 K, gradable TRIAC
Integrated LED 2700 K, dimmable TRIAC

Lumens
Lumens output

5250 lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

NA


Interrupteur
Switch

NA

Fiches
Plug

NA



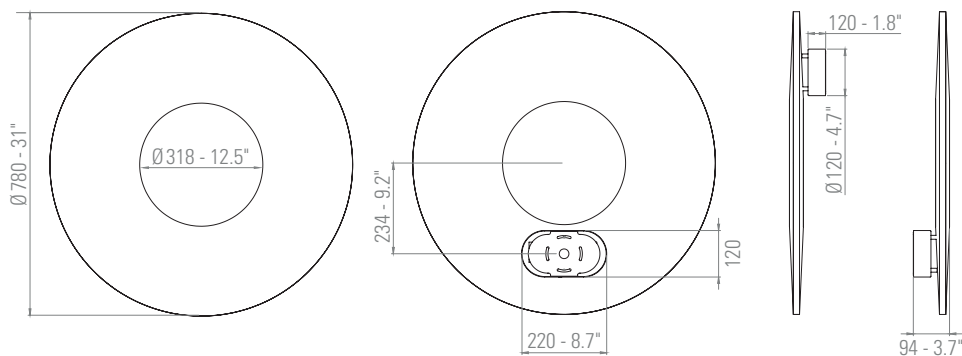

IRIS MIRROR 80

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



APPLIQUE & PLAFONNIER WALL & CEILING LAMP

Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
3,45 kg

Emballages
Packagings
875 x 150 x 875 mm
396 x 26 x 396 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

49W

Source
Source

LED intégrée 2700K, gradable TRIAC
Integrated LED 2700K, dimmable TRIAC

Lumens
Lumens output

7350lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

NA

Interrupteur
Switch

NA

Fiches
Plug

NA

