




IRIS WALL 60

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



APPLIQUE

WALL LAMP

Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
2,2 kg

Emballage
Packaging
685 x 85 x 685 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

35W

Source
Source

LED intégrée 2700 K, gradable TRIAC
Integrated LED 2700 K, dimmable TRIAC

Lumens
Lumens output

5250 lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

NA



Interrupteur
Switch

NA

Fiches
Plug

NA



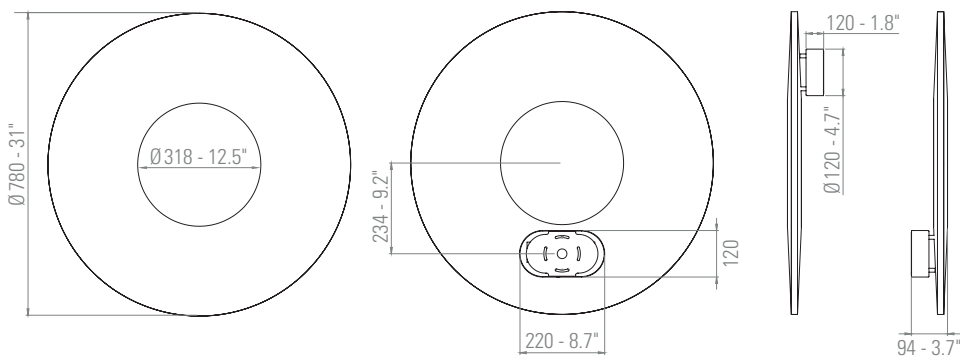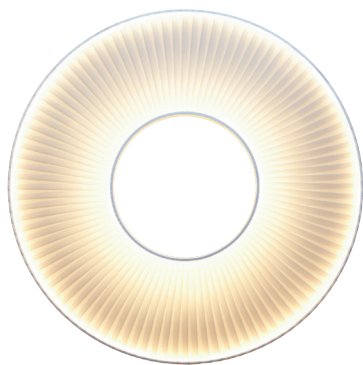

IRIS WALL 80

de Fabrice Berrux

FICHE TECHNIQUE TECHNICAL SHEET



APPLIQUE

WALL LAMP

Matériaux
Materials
Taffetas de polyester, aluminium, acier
Polyester taffetas, aluminium, steel

Poids net
Net weight
3,2 kg

Emballage
Packaging
875 x 85 x 875 mm

IP
IP
20

Tension
Voltage

230V (110V pour la version CETL)
230V (110V for CETL version)

Classe
Class

1

Watt
Watt

49W

Source
Source

LED intégrée 2700 K, gradable TRIAC
Integrated LED 2700 K, dimmable TRIAC

Lumens
Lumens output

7350 lm

Driver

Driver interne fourni
Gradable TRIAC intégré 60W / 2,5A / 24V
Option DALI ou CASAMBI sur demande
Integrated driver supplied
TRIAC dimmable 60W / 2.5A / 24V
DALI or CASAMBI option on request

Driver

Câble
Wire

NA

Interrupteur
Switch

NA

Fiches
Plug

NA

