

erluna

luga midi trimless
fixed
origin

circular product





IP65
IP54



UK
CA

luga midi trimless fixed origin

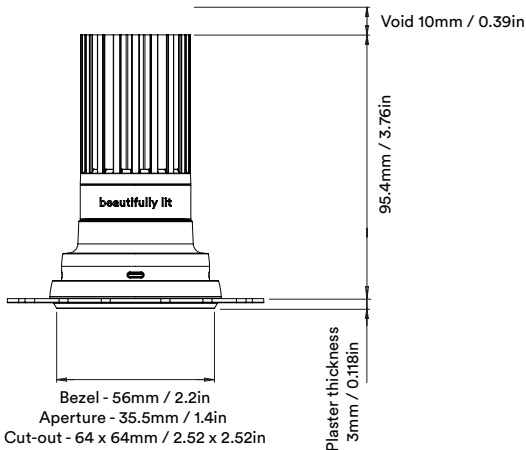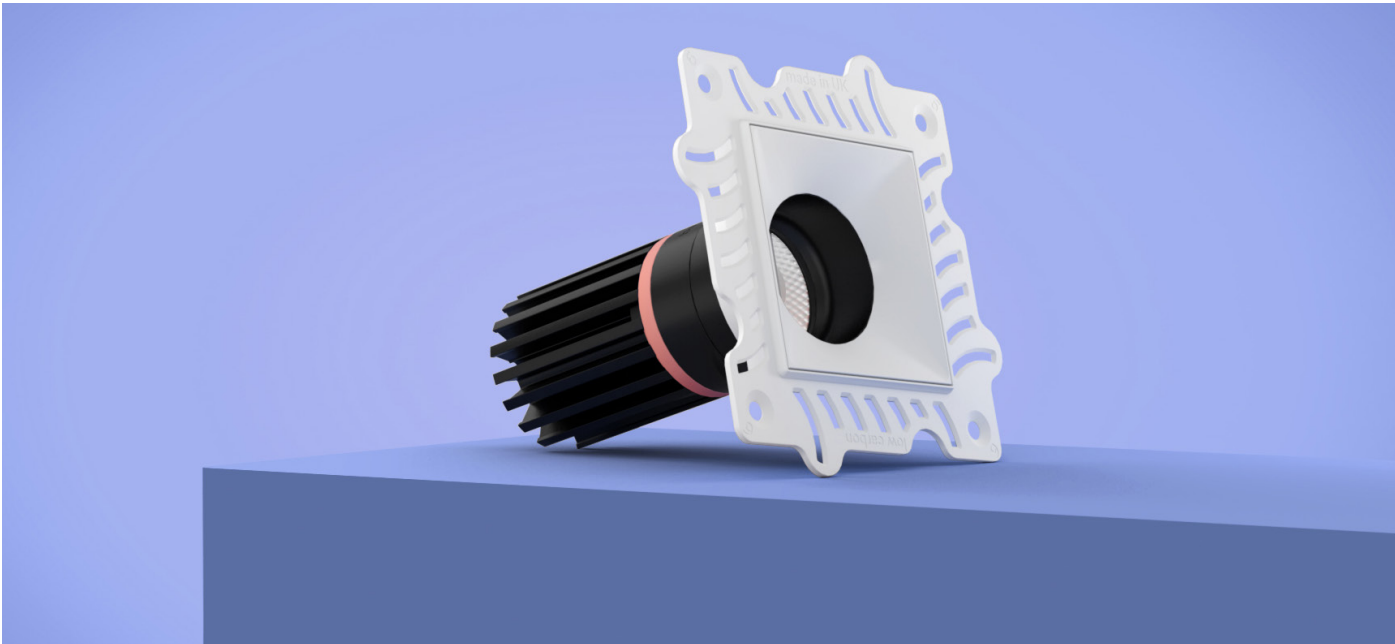


luga midi trimless fixed origin

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

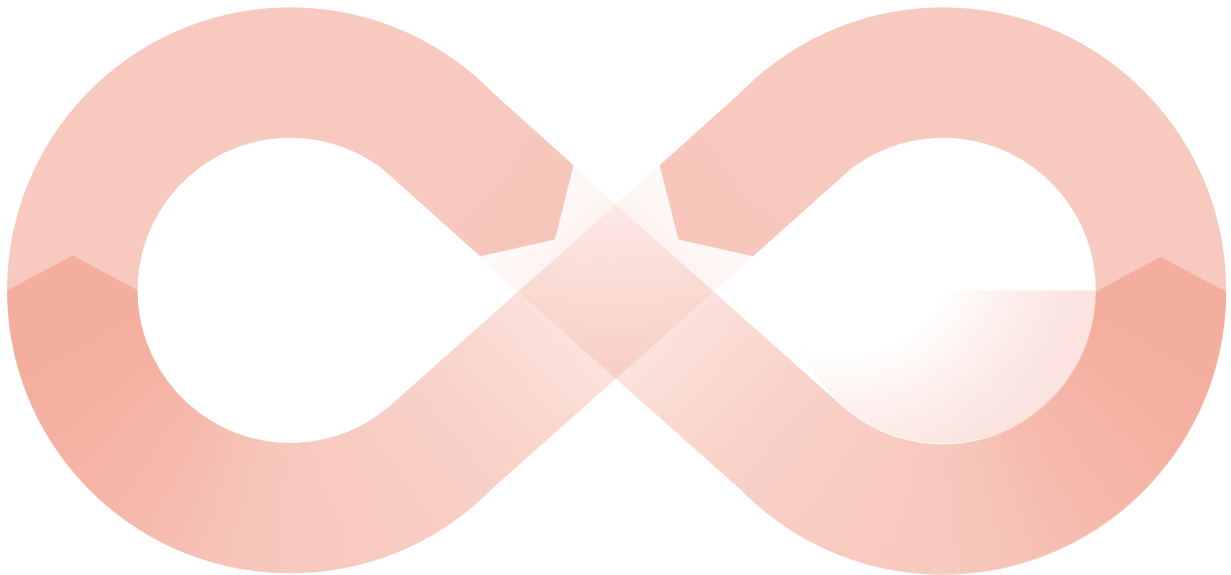

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna

luga midi trimless fixed origin

circular product

		2700K				
		SOFT				
LIGHT VALUES		Spot	Narrow	Medium	Wide	Flood
	Beam Width FWHM	12°	18°	24°	37°	45°
	Source Lumens	925	925	925	925	925
	Engine Lumens	358	687	724	731	732
	Luminaire Lumens	329	609	669	685	682
	Source Lm/CW *1	95	95	95	95	95
	Luminaire Lm/CW *2	34	63	69	71	70
	Luminiare Cd	4190	4496	3583	1785	1244
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

		3000K				
		SOFT				
		Spot	Narrow	Medium	Wide	Flood
LIGHT VALUES	Beam Width FWHM	12°	18°	24°	37°	45°
	Source Lumens	988	988	988	988	988
	Engine Lumens	382	734	773	781	782
	Luminaire Lumens	351	650	715	732	729
	Source Lm/CW *1	102	102	102	102	102
	Luminaire Lm/CW *2	36	67	74	76	75
	Luminiare Cd	4476	4804	3827	1907	1329
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

DRIVER	Binning	SDCM (Hot)	2
	CRI (typ)(R9)		98 (99)
	TM30 Rf Rg		Rf 93.8 Rg 101.9
	Lifetime (TM21)		L90 B5 50,000hrs (inc driver)
	Protocols	Mains Dim / DALI / 0-10V / Non-dim	
DRIVER	Dim to Dark	0.1% Lux	
	Distance from LED	20m / 65' (series wiring)	
	Emergency	Emergency packs available	

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OR	- LUGXDT -	27	M	M	- W -	BB	54 H
		27 / 2700K 30 / 3000K	M / Mains Dim D / DALI 0 / 0-10V N / Non Dim X / No Driver	S / Spot N / Narrow M / Medium W / Wide F / Flood	W / White 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass	BB / Black 9005 WB / White RAL 9010 DB / White RAL 9003 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	54 / IP54 65 / IP65 H / Honeycomb Louvre K / Click Connector Z / LSZH Cable E / Emergency F / 60 min Fire Rated

