

MELT CHANDELIER SMALL LED




Melt is evocative of molten glass, the interior of a melting glacier or images of deep space. An imperfect, organic and naturalistic light that produces a mesmerizing hot-blown glass effect. Melt is created through a process of blow moulding and vacuum metallisation to achieve melted orbs with abundant and unusual luminosity. Melt Chandelier Small features four orbs protruding from steel tubes.

Year of Design	2020
Product Weight	9.25kg
Finishing Process	Semi Metallised, Plated
Surface Mount Shape/Diameter	Dome, 25.4cm
Power Method	Mains
Cable Spec	H03VV-F 2 x 0,75 mm ²
Cable Type/Length	Clear, 500cm
Light Source	4 x 6W LED
Max Wattage	30W
Lumens	2300
CRI	>90
Colour Temperature	3000K
Dimmability	Mains Dimmable, Leading & Trailing Edge
Voltage	220-240V
Environment	Indoor
Spares	LEDRING02A, LEDCDRIVER01EU
Certification/Electrical Class	Certified for NZ/AUS



SILVER	
Code	MEC01CH-CEUM4
Shade Code	4 X MES01CH
Shade Material	Polycarbonate
Shade Colour/Finish	Silver, Mirrored
Fitting Code	LEDC01CHEU (CHINA : LEDC01CHCCC)
Fitting Material	Steel
Fitting Colour/Finish	Silver, Polished
Service Offer	Collection

GOLD	
Code	MEC01GO-CEUM4
Shade Code	4 X MES01G
Shade Material	Polycarbonate
Shade Colour/Finish	Gold, Mirrored
Fitting Code	LEDC01GOEU (CHINA : LEDC01GOCCC)
Fitting Material	Steel
Fitting Colour/Finish	Gold, Polished
Service Offer	Collection



MELT CHANDELIER SMALL LED




Melt is evocative of molten glass, the interior of a melting glacier or images of deep space. An imperfect, organic and naturalistic light that produces a mesmerizing hot-blown glass effect. Melt is created through a process of blow moulding and vacuum metallisation to achieve melted orbs with abundant and unusual luminosity. Melt Chandelier Small features four orbs protruding from steel tubes.

Year of Design	2020
Product Weight	9.25kg
Finishing Process	Semi Metallised, Plated
Surface Mount Shape/Diameter	Dome, 25.4cm
Power Method	Mains
Cable Spec	H03VV-F 2 x 0,75 mm2
Cable Type/Length	Clear, 500cm
Light Source	4 x 6W LED
Max Wattage	30W
Lumens	2300
CRI	>90
Colour Temperature	3000K
Dimmability	Mains Dimmable, Leading & Trailing Edge
Voltage	220-240V
Environment	Indoor
Spares	LEDRING02A, LEDCDRIVER01EU
Certification/Electrical Class	Certified for NZ/AUS




COPPER	
Code	MEC01CO-CEUM4
Shade Code	4 X MES01CO
Shade Material	Polycarbonate
Shade Colour/Finish	Copper, Mirrored
Fitting Code	LEDC01GOEU (CHINA : LEDC01GOCCC)
Fitting Material	Steel
Fitting Colour/Finish	Gold, Polished
Service Offer	Collection

SMOKE	
Code	MEC01SM-CEUM4
Shade Code	4 X MES01SM
Shade Material	Polycarbonate
Shade Colour/Finish	Smoke, Mirrored
Fitting Code	LEDC01CHEU (CHINA : LEDC01CHCCC)
Fitting Material	Steel
Fitting Colour/Finish	Silver, Polished
Service Offer	Collection



MELT SMALL CHANDELIER OPAL LED

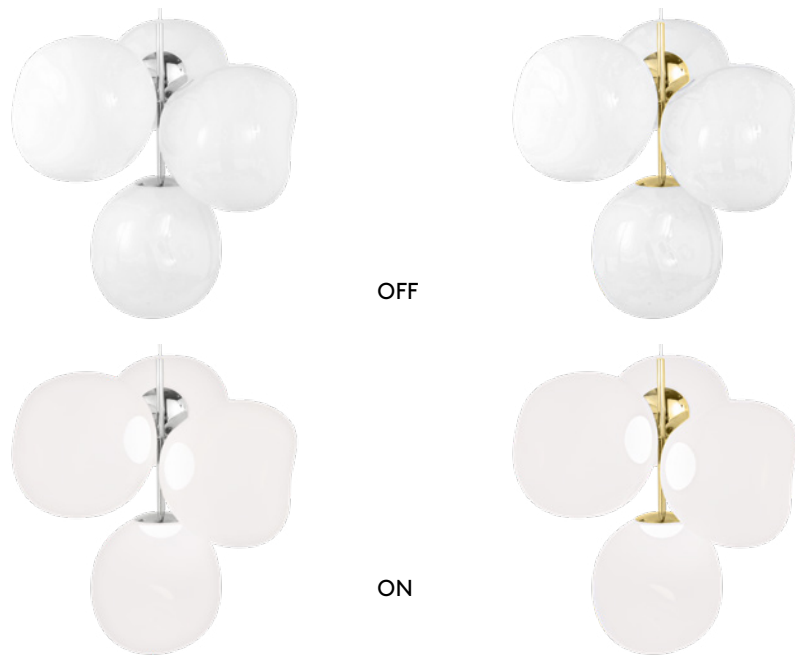

Melt Small Chandelier features four opalescent shades protruding from steel tubes and measuring one metre high. By retaining Melt’s organic form, we have created an opal version, which boosts its luminosity. To complement our range of metallic shades, we’ve introduced Opal as an alternative finish for interiors that have a more monochromatic style. Semi translucent, it maintains an ethereal ghostliness in the daylight and at night forms perfectly illuminated orbs.

OPAL WITH SILVER FITTING

Code	MEC01OP-CEUM4
Shade Code	4 x MES01OP
Shade Material	Polycarbonate
Shade Colour/Finish	Opalescent, tinted
Fitting Code	LEDC02CHEU (China: LEDC01CHCCC)
Fitting Material	Steel
Fitting Colour/Finish	Silver, Polished
Service Offer	New

OPAL WITH GOLD FITTING

Code	MEC01OPG-CEUM4
Shade Code	4 x MES01OP
Shade Material	Polycarbonate
Shade Colour/Finish	Opalescent, tinted
Fitting Code	LEDC01GOEU (China: LEDC01GOCCC)
Fitting Material	Steel
Fitting Colour/Finish	Gold, Polished
Service Offer	New

Year of Design	2020
Product Weight	9.25kg
Finishing Process	Tinted, Plated
Surface Mount Shade/Diameter	Dome, 25.4cm
Power Method	Mains
Cable Spec	H03VVH2-F 2 x 0,75 mm ² FEP/PVC
Cable Type Length	Clear, 500cm
Light Source	4 x 6W LED
Max Wattage	30W
Lumens	2300
CRI	>90
Colour Temperature	3000K (Standard), 2700K Accessory Available
Dimmability	Mains Dimmable, Leading and Trailing Edge
Voltage	220-240V
Environment	Indoor
Spares	4 x LEDRING02A; 4 x LEDRING12A; 1 x LEDCDRIVER01EU
Certification/Electrical Class	Certified for NZ/AUS

