

FLOS


■ F0264000 Black

Noctambule Suspension 3 High Cylinder

Designed by Konstantin Grcic, 2019

36W - 1202lm - 2700K - CRI> 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000557
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	36
System flux (lm)	1202

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	14.9
Package volume (m3)	0.26
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
---------------------------	-------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000A
Noctambule High Cylinder



F0258030A
Terminal ring

FLOS


■ F0276000 Black

Noctambule Suspension 3 Low Cylinder

Designed by Konstantin Grcic, 2019

36W - 1196lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000717
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	36
System flux (lm)	1196

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	13.4
Package volume (m3)	0.23
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

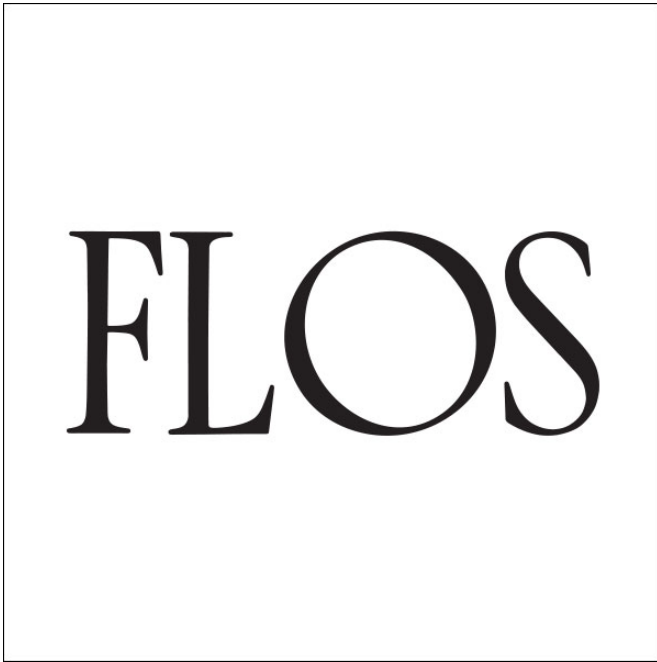

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0258030A
Terminal ring

FLOS

■ F0277000 Black

Noctambule Suspension 4 Low Cylinder

Designed by Konstantin Grcic, 2019




45W - 1482lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

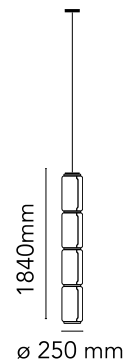

Main specifications

EAN	8059607000724
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	1482

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	16.9
Package volume (m3)	0.29
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0258030A
Terminal ring

FLOS

■ F0278000 Black

Noctambule Suspension 5 Low Cylinder

Designed by Konstantin Grcic, 2019


54W - 1768lm - 2700K



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000731
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	54
System flux (lm)	1768

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	20.4
Package volume (m3)	0.36
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

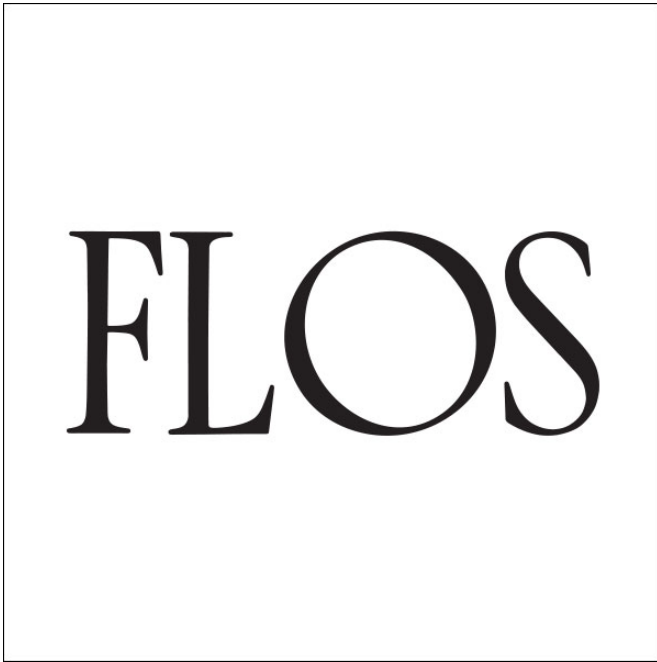

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0258030A
Terminal ring

FLOS

■ F0279000 Black

Noctambule Suspension 6 Low Cylinder

Designed by Konstantin Grcic, 2019


63W - 2054lm - 2700K



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

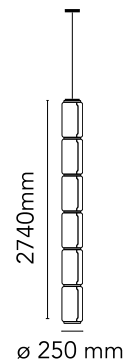

Main specifications

EAN	8059607000748
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	63
System flux (lm)	2054

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	23.9
Package volume (m3)	0.42
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0258030A
Terminal ring

FLOS


■ F0280000 Black

Noctambule Suspension 4 High Cylinder

Designed by Konstantin Grcic, 2019

45W - 1500lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607000755
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	1500

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	18.9
Package volume (m3)	0.33
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-------

Technical Drawings

3D	↓ ZIP
🔒 Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

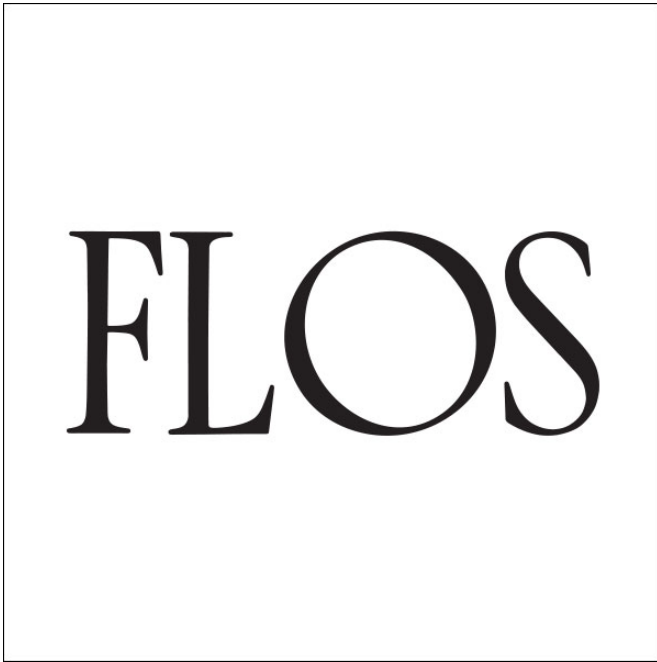

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000A
Noctambule High Cylinder



F0258030A
Terminal ring

FLOS

■ F0281000 Black

Noctambule Suspension 5 High Cylinder

Designed by Konstantin Grcic, 2019


54W - 1798lm - 2700K



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000762
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	54
System flux (lm)	1798

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	22.9
Package volume (m3)	0.41
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
---------------------------	-------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000A
Noctambule High Cylinder



F0258030A
Terminal ring

FLOS

■ F0282000 Black

Noctambule Suspension 6 High Cylinder

Designed by Konstantin Grcic, 2019


63W - 2096lm - 2700K



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000779
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	63
System flux (lm)	2096

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	26.9
Package volume (m3)	0.48
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
---------------------------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

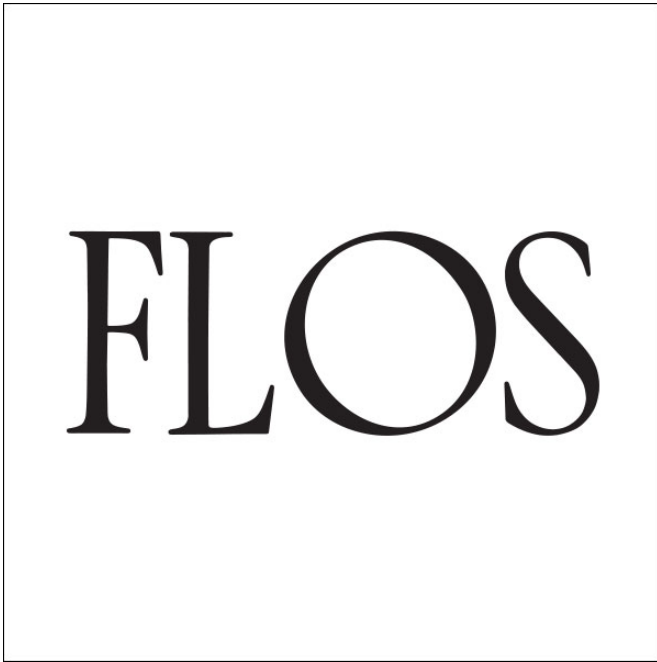

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000A |
| 08. | Terminal ring | F0258030A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000A
Noctambule High Cylinder



F0258030A
Terminal ring