

FLOS

■ F0263000 Black

Noctambule Suspension 1 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019



36W - 1007lm - 2700K - CRI> 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000540
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	36
System flux (lm)	1007

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	10.7
Package volume (m3)	0.43
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
---------------------------	-------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|------------------------------------------------------|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 10. | Noctambule Bowl | F0255000A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0255000A
Noctambule Bowl

FLOS

■ F0273000 Black

Noctambule Suspension 2 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019




45W - 1007lm - 2700K - CRI> 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000687
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	1007

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	14.2
Package volume (m3)	0.5
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

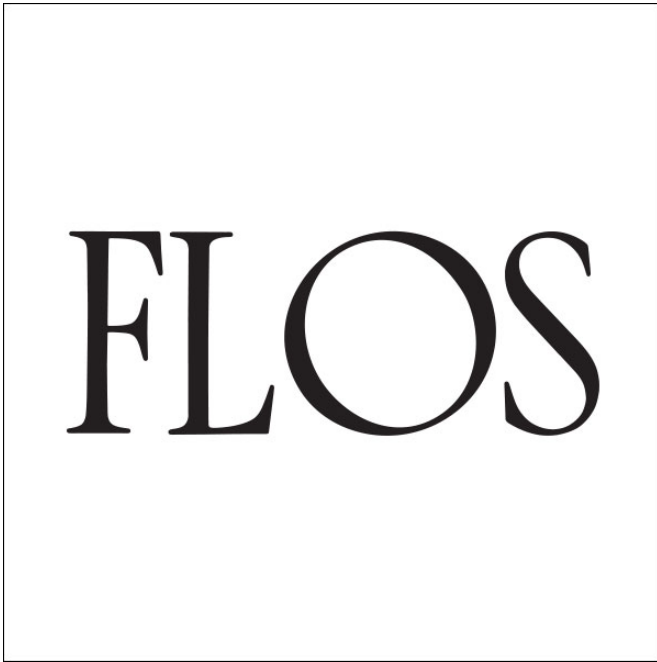

- | | | |
|-----|------------------------------------------------------|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 10. | Noctambule Bowl | F0255000A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0255000A
Noctambule Bowl

FLOS

■ F0274000 Black

Noctambule Suspension 3 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019




54W - 1293lm - 2700K - CRI > 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10V/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000694
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	54
System flux (lm)	1293

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	17.7
Package volume (m3)	0.56
IP internal	20

Download

- [Mounting instructions](#) PDF
- [Mounting instructions](#) PDF
- [Spare Parts](#) PDF

Photometric Files


- [LDT / IES](#) ZIP

Technical Drawings

- [3D](#) ZIP
- [Bim](#) ZIP



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|------------------------------------------------------|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 10. | Noctambule Bowl | F0255000A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0255000A
Noctambule Bowl

FLOS

■ F0275000 Black

Noctambule Suspension 4 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019


63W - 1579lm - 2700K - CRI> 90



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000700
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	63
System flux (lm)	1579

Physical

Colour	Black
Cord length (mm)	4000
Canopy dimension (mm)	46
Net weight (kg)	21.2
Package volume (m3)	0.62
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

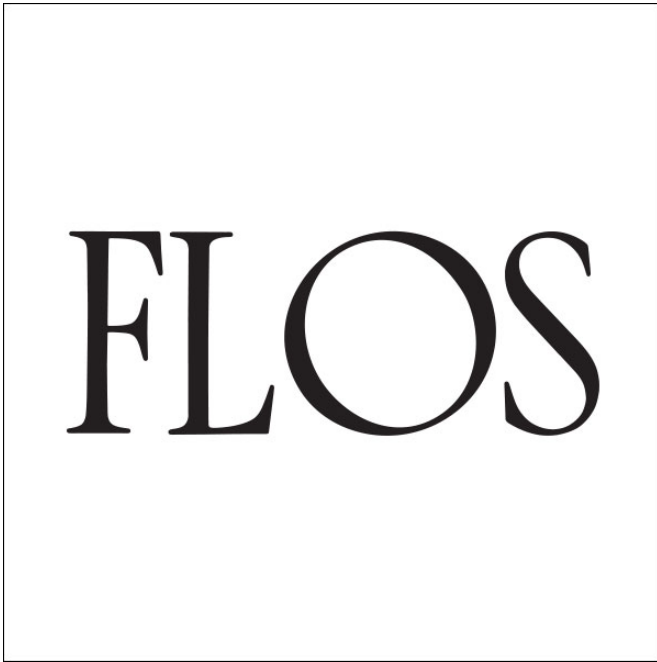

- | | | |
|-----|------------------------------------------------------|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030A |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000A |
| 10. | Noctambule Bowl | F0255000A |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030A
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000A
Noctambule Low Cylinder



F0255000A
Noctambule Bowl