


Murané

220-240V AC ON-OFF  
L11505.010.0501




Data sheet

|                          |                       |
|--------------------------|-----------------------|
| CODE                     | L11505.010.0501       |
| SYSTEM POWER CONSUMPTION | 4W                    |
| EFFICACY                 | 41.75lm/W             |
| LIGHT SOURCE             | LED                   |
| COLOUR TEMPERATURE       | 2700K Ra>90           |
| LIGHT DISTRIBUTION       | diffused              |
| POWER SUPPLY             | 220-240V AC           |
| FREQUENCY                | 50/60Hz               |
| ELECTRICAL CONFIGURATION | ON-OFF                |
| DRIVER                   | integrated included   |
| LUMEN OUTPUT             | 167lm                 |
| WEIGHT                   | 0,68 Kg               |
| PROTECTION DEGREE        | IP20                  |
| COLOUR TOLLERANCES       | SDCM 3                |
| PACKING DIMENSIONS       | 14,0 x 30,0 x 13,0 cm |



Suspension lighting fixture for interiors, with direct and indirect light emission. Turned brass wiring support. Diffuser in blown glass with bronze colour. Turned aluminium closing disk in champagne polyacrylic paint. 3m (118,1") long suspension and coaxial power cable in transparent PVC. Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in champagne polyacrylic paint.

Technical drawing

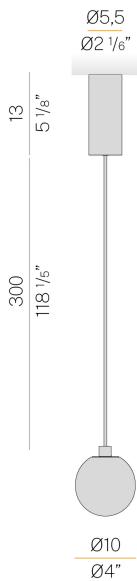

Polar diagram

