


Superbold

220-240V AC dimmable (phase cut)  
P09905.045.0404

 champagne




Data sheet

CODE	P09905.045.0404
SYSTEM POWER CONSUMPTION	21W
EFFICACY	68.71lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3237lm
LUMEN OUTPUT	1443lm
EFFICIENCY	44.6%
WEIGHT	2,06 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	46,0 x 46,0 x 16,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.  
Aluminium wiring support plate with polyacrylate paint finish.  
Curved diffuser screen made of matt PMMA technopolymer.  
DALI/Push DIM driver available on request.

Technical drawing

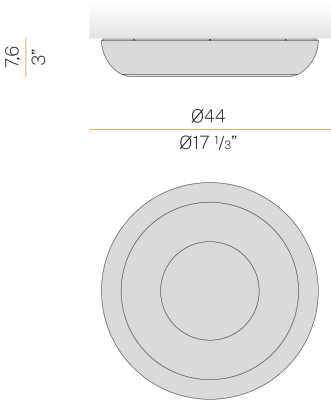


Application



Superbold

220-240V AC dimmable (phase cut)  
P09905.045.0504

 champagne




Data sheet

CODE	P09905.045.0504
SYSTEM POWER CONSUMPTION	21W
EFFICACY	67.33lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3172lm
LUMEN OUTPUT	1414lm
EFFICIENCY	44.6%
WEIGHT	2,06 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	46,0 x 46,0 x 16,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.  
Aluminium wiring support plate with polyacrylate paint finish.  
Curved diffuser screen made of matt PMMA technopolymer.  
DALI/Push DIM driver available on request.

Technical drawing

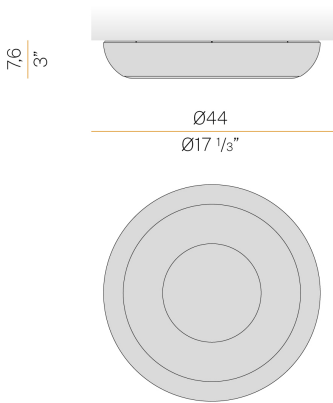


Application



Superbold

220-240V AC dimmable (phase cut)  
P09905.060.0404

 champagne




Data sheet

CODE	P09905.060.0404
SYSTEM POWER CONSUMPTION	32W
EFFICACY	67.66lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4856lm
LUMEN OUTPUT	2165lm
EFFICIENCY	44.6%
WEIGHT	3,88 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	62,0 x 62,0 x 20,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.  
Aluminium wiring support plate with polyacrylate paint finish.  
Curved diffuser screen made of matt PMMA technopolymer.  
DALI/Push DIM driver available on request.

Technical drawing

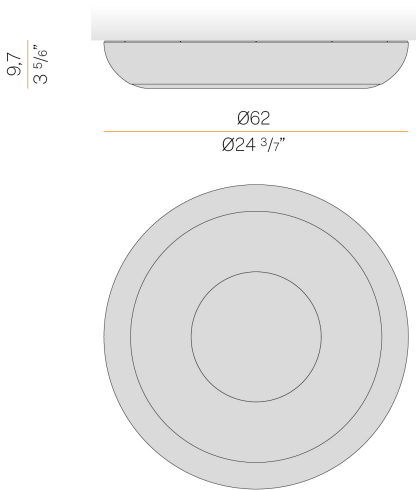

Application



Superbold

220-240V AC dimmable (phase cut)  
P09905.060.0504

champagne




Data sheet

CODE	P09905.060.0504
SYSTEM POWER CONSUMPTION	32W
EFFICACY	66.31lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4758lm
LUMEN OUTPUT	2122lm
EFFICIENCY	44.6%
WEIGHT	3,88 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	62,0 x 62,0 x 20,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.  
Aluminium wiring support plate with polyacrylate paint finish.  
Curved diffuser screen made of matt PMMA technopolymer.  
DALI/Push DIM driver available on request.

Technical drawing

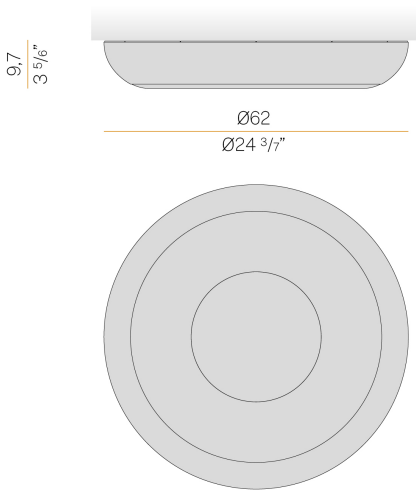

Application

