PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.060.0404

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.060.0404
SYSTEM POWER CONSUMPTION	35W
EFFICACY	77.37lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4800lm
LUMEN OUTPUT	2708lm
EFFICIENCY	56.4%
WEIGHT	2,11 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,5 x 63,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

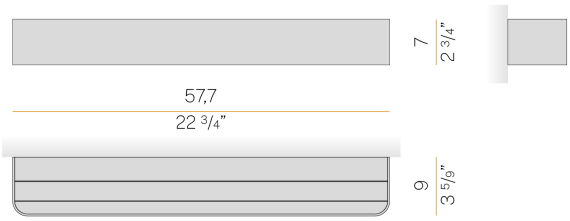

Polar diagram

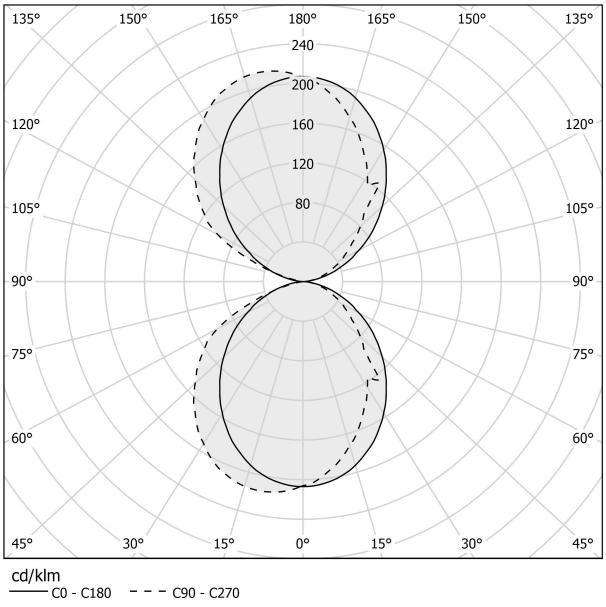

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.045.0404

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.045.0404
SYSTEM POWER CONSUMPTION	26W
EFFICACY	78.12lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3600lm
LUMEN OUTPUT	2031lm
EFFICIENCY	56.4%
WEIGHT	1,66 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,5 x 45,0 x 10,5 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

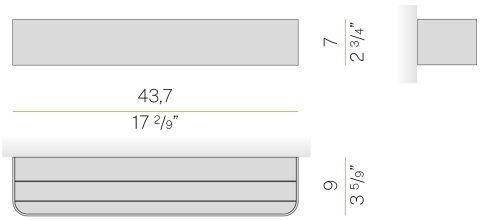

Polar diagram

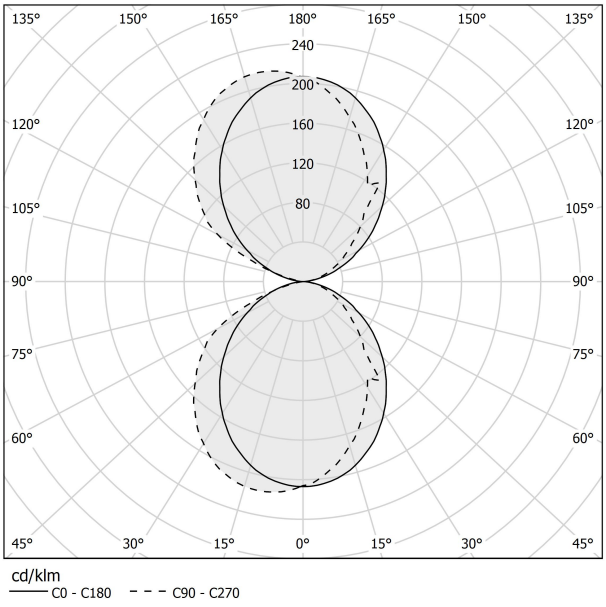

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.030.0404

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.030.0404
SYSTEM POWER CONSUMPTION	20W
EFFICACY	67.7lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2400lm
LUMEN OUTPUT	1354lm
EFFICIENCY	56.4%
WEIGHT	1,20 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 32,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

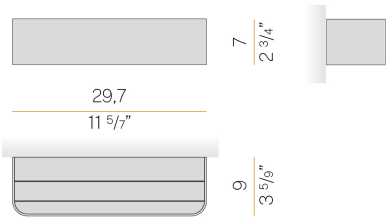

Polar diagram

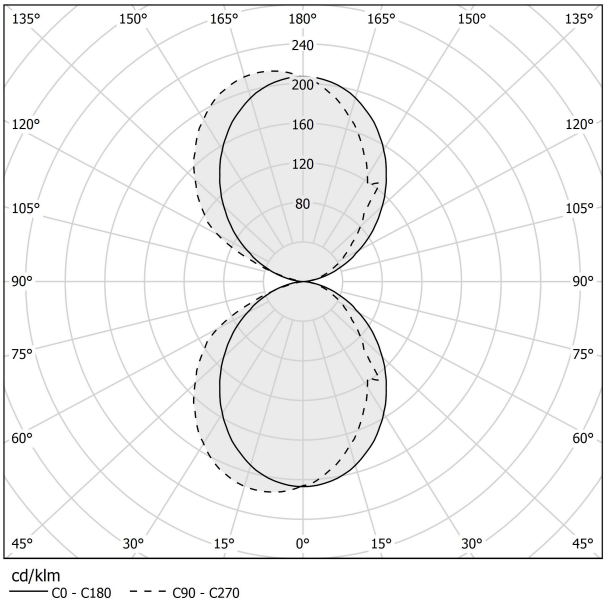

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.015.0404

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.015.0404
SYSTEM POWER CONSUMPTION	10W
EFFICACY	67.7lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1200lm
LUMEN OUTPUT	677lm
EFFICIENCY	56.4%
WEIGHT	0,69 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 24,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing



Polar diagram

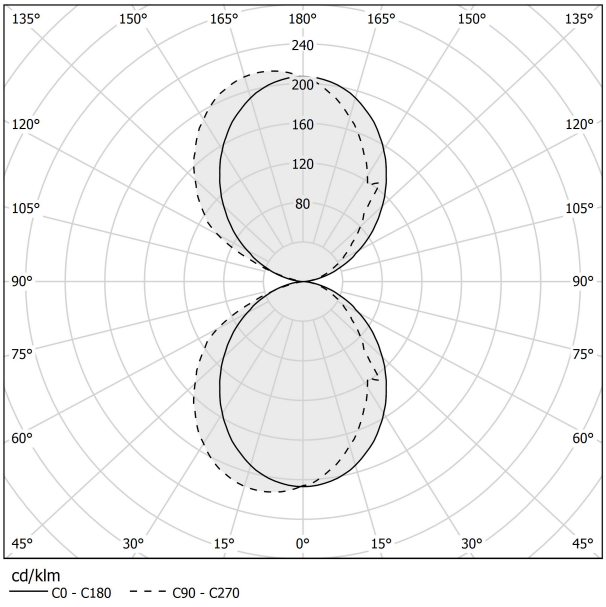

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.060.0504

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.060.0504
SYSTEM POWER CONSUMPTION	35W
EFFICACY	75.09lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4652lm
LUMEN OUTPUT	2628lm
EFFICIENCY	56.5%
WEIGHT	2,11 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,5 x 63,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

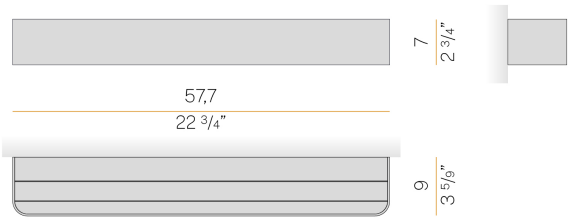

Polar diagram

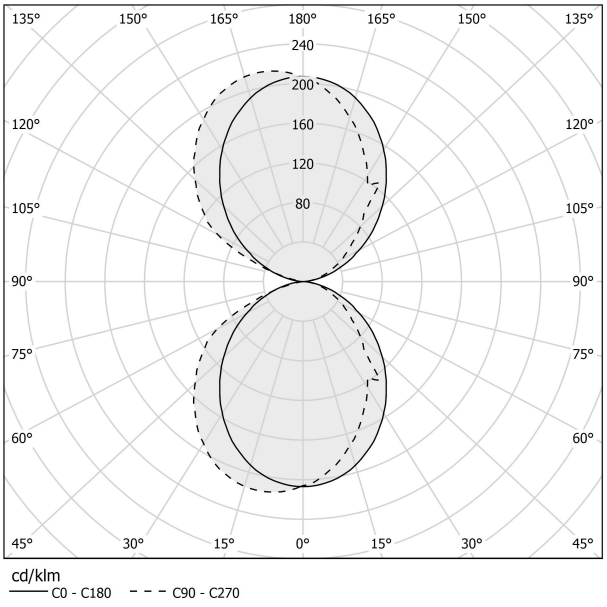

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.045.0504

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.045.0504
SYSTEM POWER CONSUMPTION	26W
EFFICACY	75.81lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3600lm
LUMEN OUTPUT	1971lm
EFFICIENCY	54.8%
WEIGHT	1,66 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,5 x 45,0 x 10,5 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

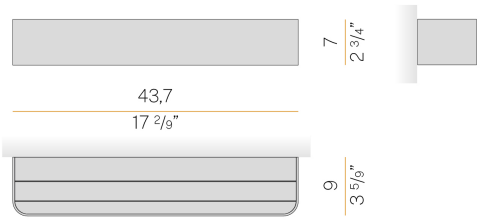

Polar diagram

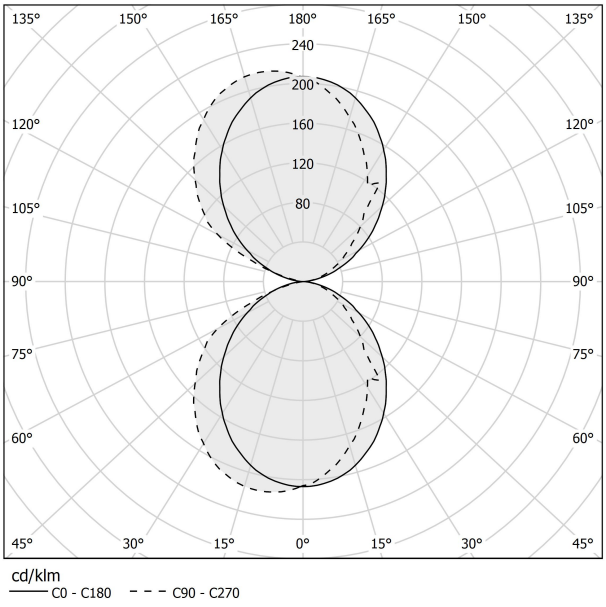

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.030.0504

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.030.0504
SYSTEM POWER CONSUMPTION	20W
EFFICACY	65.7lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2326lm
LUMEN OUTPUT	1314lm
EFFICIENCY	56.5%
WEIGHT	1,20 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 32,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

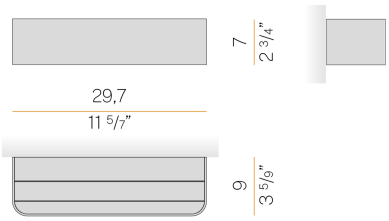

Polar diagram

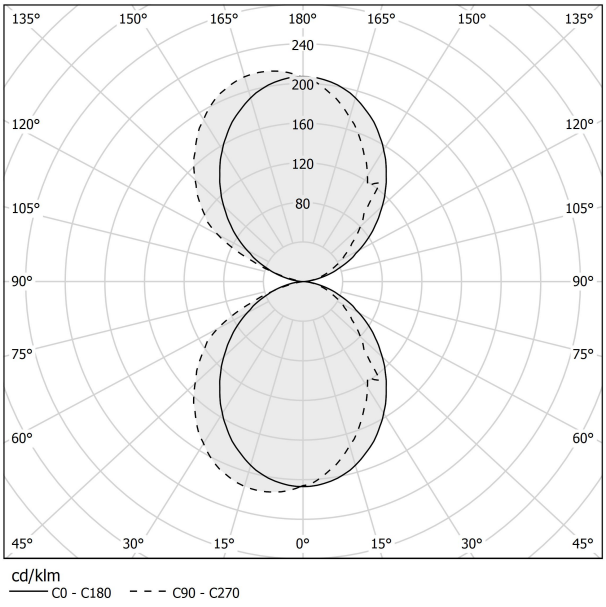

PANZERI

Toy R

220-240V AC dimmable (phase cut)
A14201.015.0504

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.015.0504
SYSTEM POWER CONSUMPTION	10W
EFFICACY	65.7lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1163lm
LUMEN OUTPUT	657lm
EFFICIENCY	56.5%
WEIGHT	0,69 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 24,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing



Polar diagram

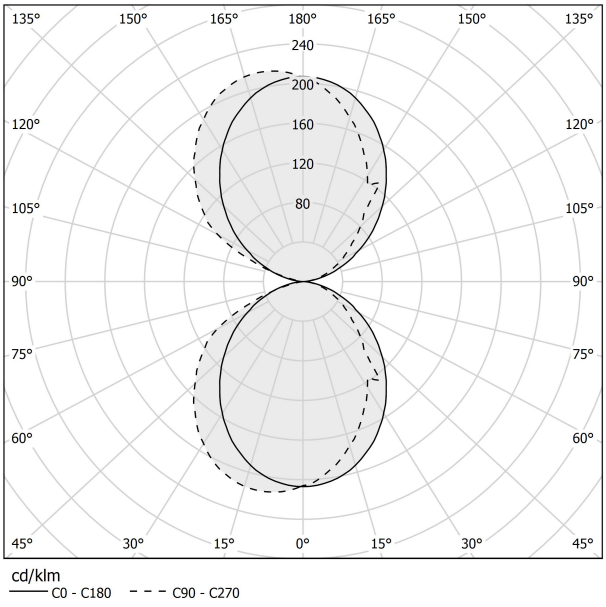

PANZERI

Toy R

220-240V AC ON-OFF
A14201.060.0401

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.060.0401
SYSTEM POWER CONSUMPTION	35W
EFFICACY	77.37lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4800lm
LUMEN OUTPUT	2708lm
EFFICIENCY	56.4%
WEIGHT	2,11 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,5 x 63,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

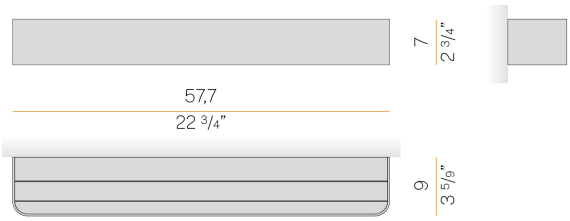

Polar diagram

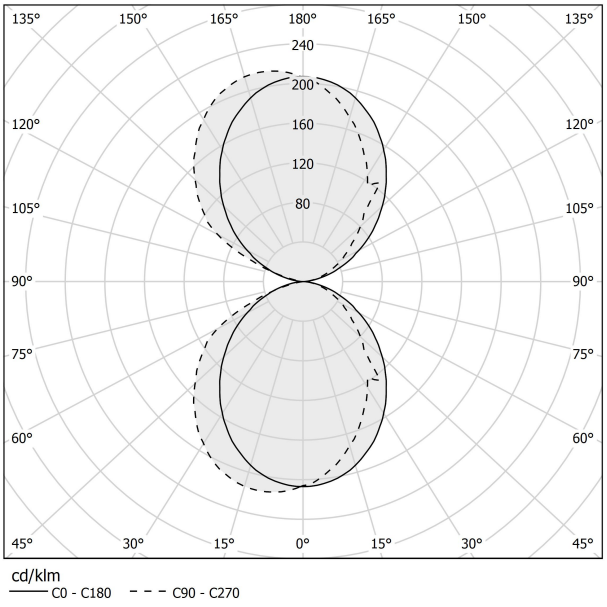

PANZERI

Toy R

220-240V AC ON-OFF
A14201.045.0401

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.045.0401
SYSTEM POWER CONSUMPTION	26W
EFFICACY	78.12lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3600lm
LUMEN OUTPUT	2031lm
EFFICIENCY	56.4%
WEIGHT	1,66 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,5 x 45,0 x 10,5 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

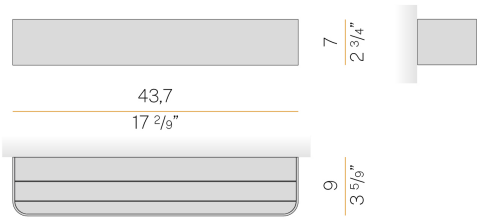

Polar diagram

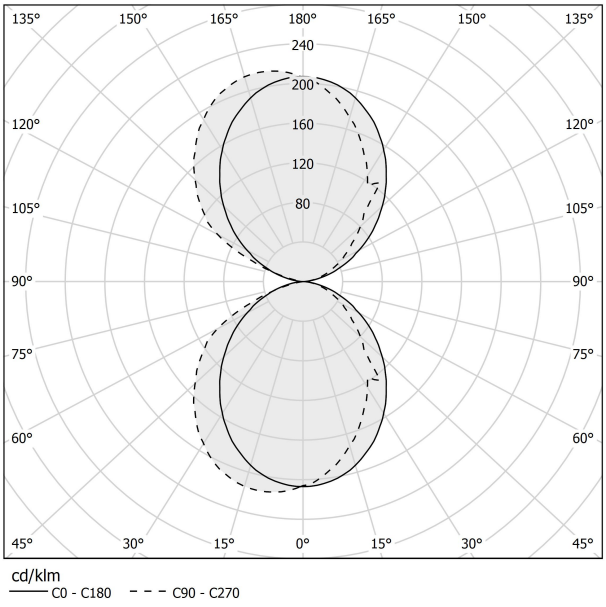

PANZERI

Toy R

220-240V AC ON-OFF
A14201.030.0401

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.030.0401
SYSTEM POWER CONSUMPTION	18W
EFFICACY	75.22lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2400lm
LUMEN OUTPUT	1354lm
EFFICIENCY	56.4%
WEIGHT	1,20 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 32,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

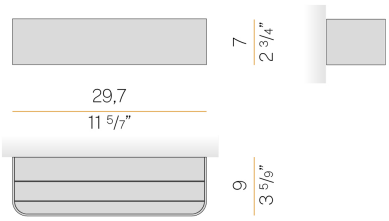

Polar diagram

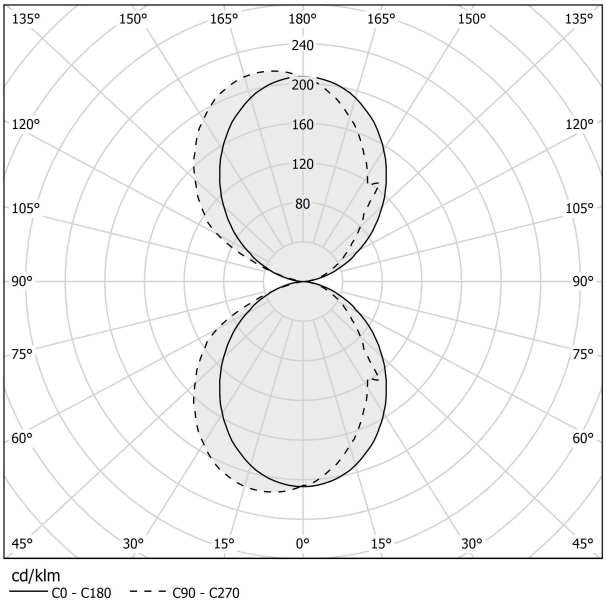

PANZERI

Toy R

220-240V AC ON-OFF
A14201.060.0501

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.060.0501
SYSTEM POWER CONSUMPTION	35W
EFFICACY	75.09lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4652lm
LUMEN OUTPUT	2628lm
EFFICIENCY	56.5%
WEIGHT	2,11 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,5 x 63,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

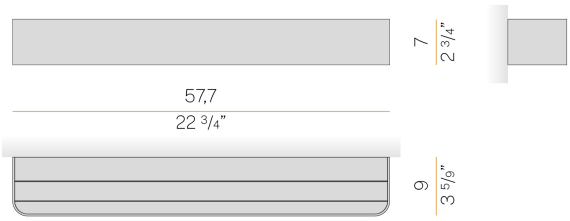

Polar diagram

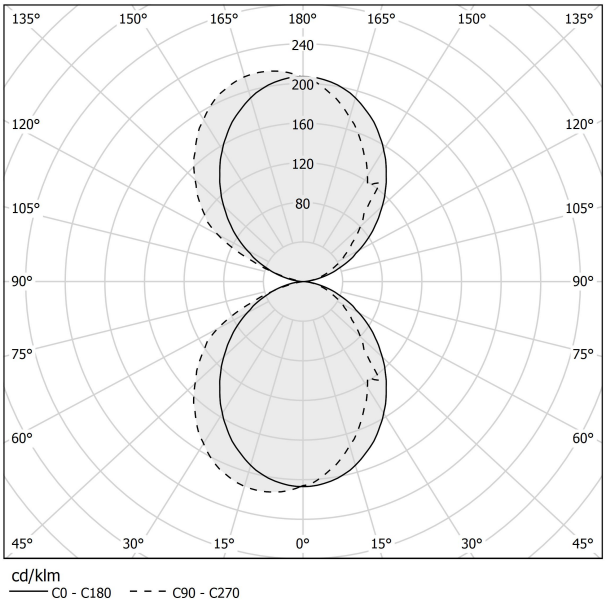

PANZERI

Toy R

220-240V AC ON-OFF
A14201.045.0501

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.045.0501
SYSTEM POWER CONSUMPTION	26W
EFFICACY	75.81lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3489lm
LUMEN OUTPUT	1971lm
EFFICIENCY	56.5%
WEIGHT	1,66 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,5 x 45,0 x 10,5 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

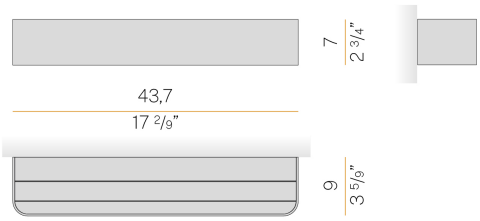

Polar diagram

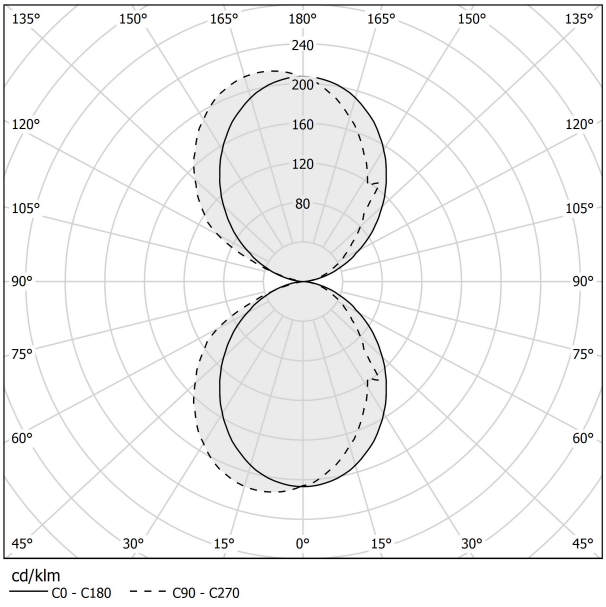

PANZERI

Toy R

220-240V AC ON-OFF
A14201.030.0501

white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	A14201.030.0501
SYSTEM POWER CONSUMPTION	18W
EFFICACY	73lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2326lm
LUMEN OUTPUT	1314lm
EFFICIENCY	56.5%
WEIGHT	1,20 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 32,0 x 13,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Body in extruded aluminium and cover in pickled sheet steel, with white, black, bronze, mat brass or titanium polyacrylic paint.
Wall mounting bracket in bent steel sheet.
Opal polycarbonate diffuser screens.

Technical drawing

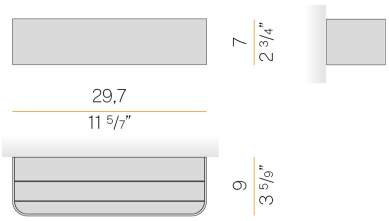

Polar diagram

