

Zero Round

24V DC 24V  
M15302.050.0410




Data sheet

CODE	M15302.050.0410
SYSTEM POWER CONSUMPTION	17W
EFFICACY	119.94lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2396lm
LUMEN OUTPUT	2039lm
EFFICIENCY	85.1%
WEIGHT	0,83 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	139,0 x 139,0 x 66,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

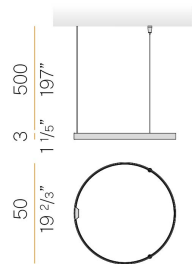

Polar diagram

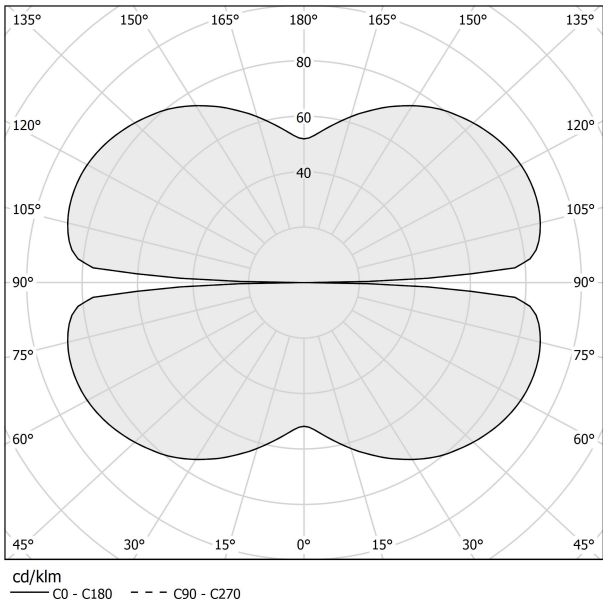


Zero Round

24V DC 24V  
M15302.075.0410




Data sheet

CODE	M15302.075.0410
SYSTEM POWER CONSUMPTION	24W
EFFICACY	127.46lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	3594lm
LUMEN OUTPUT	3059lm
EFFICIENCY	85.1%
WEIGHT	1,12 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	149,0 x 149,0 x 76,0 cm

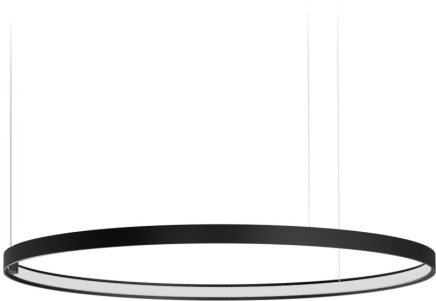


Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

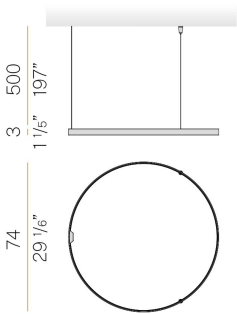

Polar diagram

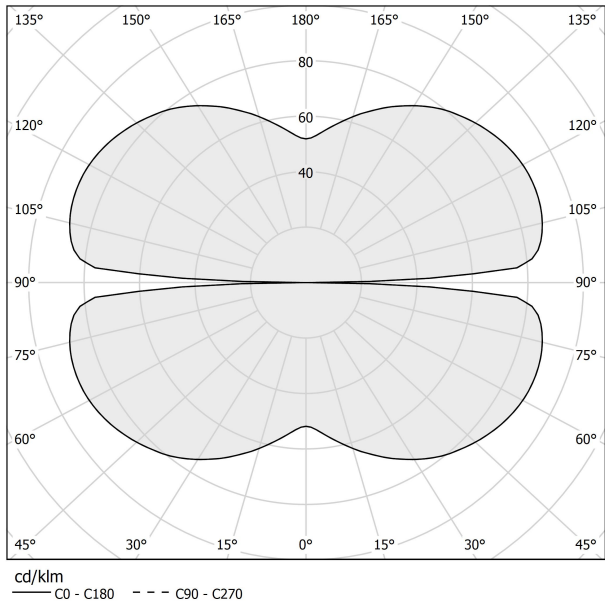


Zero Round

24V DC 24V  
M15302.100.0410




Data sheet

CODE	M15302.100.0410
SYSTEM POWER CONSUMPTION	33W
EFFICACY	123.6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	4792lm
LUMEN OUTPUT	4079lm
EFFICIENCY	85.1%
WEIGHT	1,43 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	129,0 x 129,0 x 56,0 cm

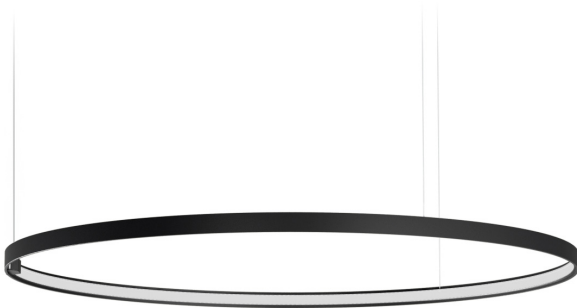


Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

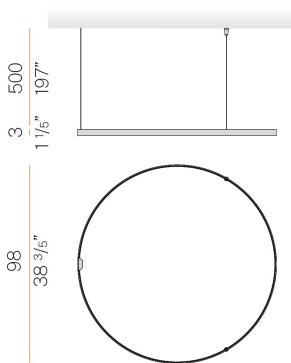

Polar diagram

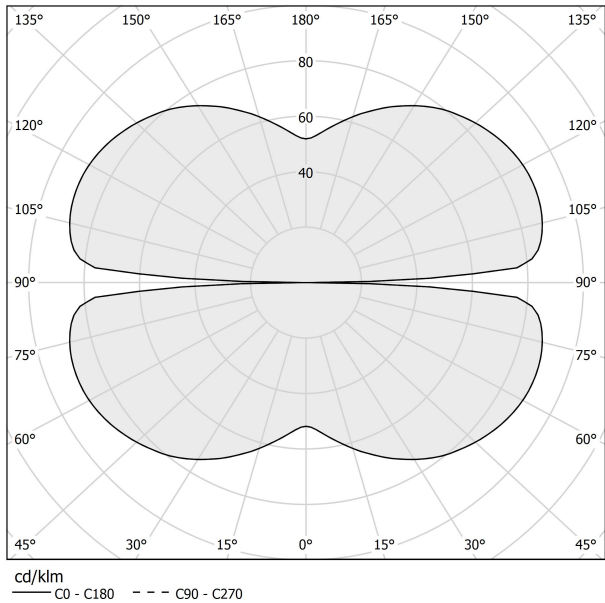


Zero Round

24V DC 24V  
M15502.125.0410




Data sheet

CODE	M15502.125.0410
SYSTEM POWER CONSUMPTION	41W
EFFICACY	124.37lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	5990lm
LUMEN OUTPUT	5099lm
EFFICIENCY	85.1%
WEIGHT	1,50 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	132,0 x 132,0 x 9,0 cm

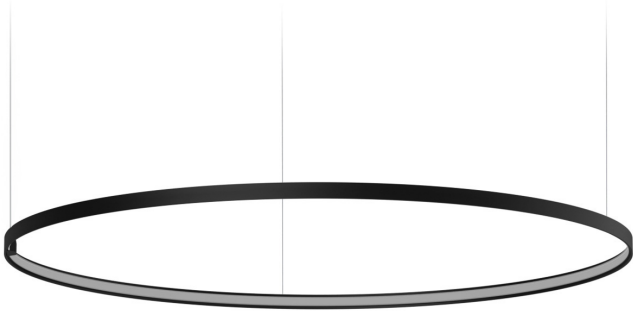


Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

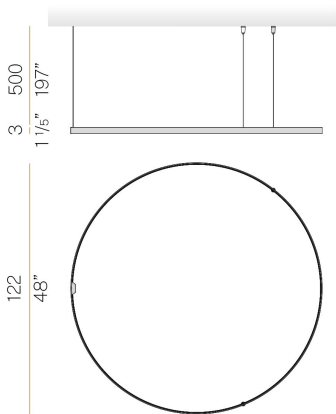

Polar diagram

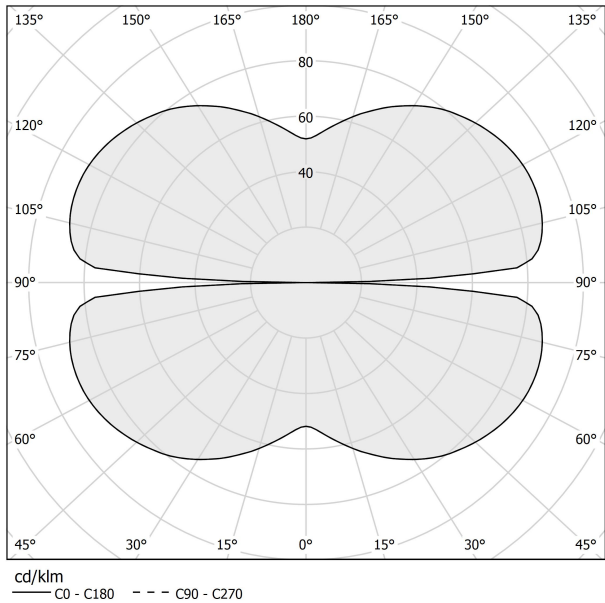



Zero Round


24V DC 24V  
M15502.150.0410

black




Data sheet

CODE	M15502.150.0410
SYSTEM POWER CONSUMPTION	48,5W
EFFICACY	127.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	7188lm
LUMEN OUTPUT	6120lm
EFFICIENCY	85.1%
WEIGHT	1,58 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	160,0 x 160,0 x 11,0 cm

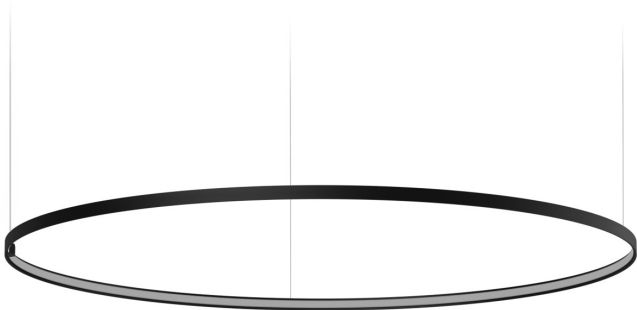


Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

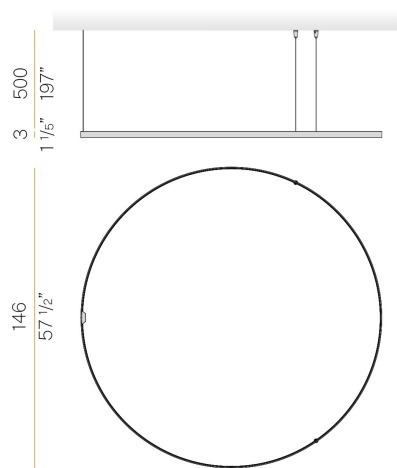

Polar diagram

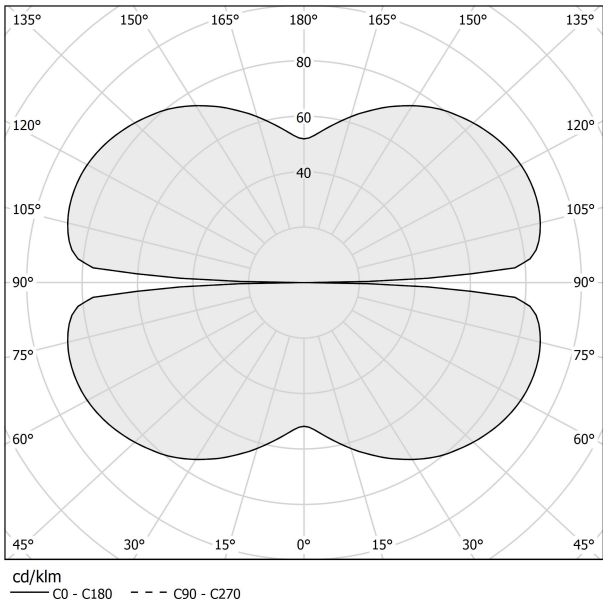


Zero Round

24V DC 24V  
M15502.200.0410



Data sheet

CODE	M15502.200.0410
SYSTEM POWER CONSUMPTION	65W
EFFICACY	125.51lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	9584lm
LUMEN OUTPUT	8158lm
EFFICIENCY	85.1%
WEIGHT	2,34 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	200,0 x 200,0 x 11,0 cm

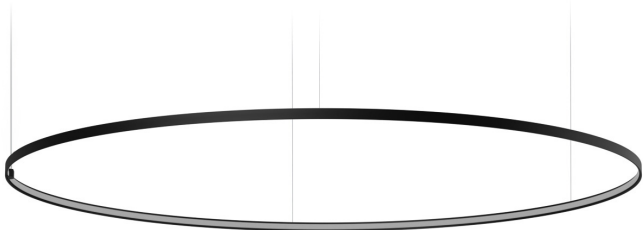

Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.


Extruded polycarbonate diffuser with opaline finish.

Suspension kit with griplocks and 5m (196,9") long steel cables.


5m (196,9") long power cable in transparent PVC.

Provided without power canopy.

Technical drawing

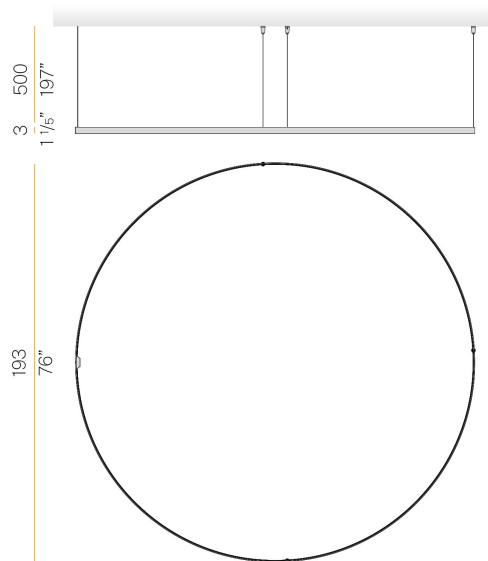

Polar diagram

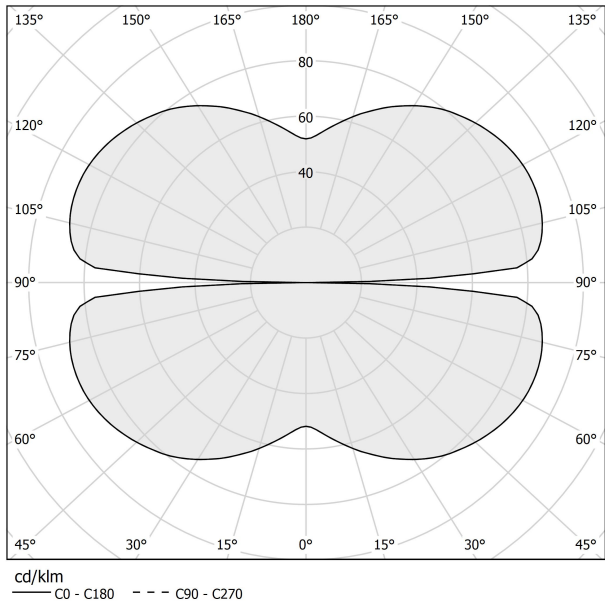

Zero Round

24V DC 24V  
M15301.050.0510

white




Data sheet

CODE	M15301.050.0510
SYSTEM POWER CONSUMPTION	17W
EFFICACY	119.94lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2396lm
LUMEN OUTPUT	2039lm
EFFICIENCY	85.1%
WEIGHT	0,83 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	134,0 x 134,0 x 61,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

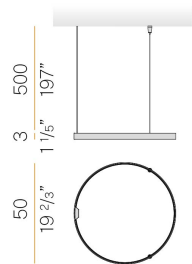

Polar diagram

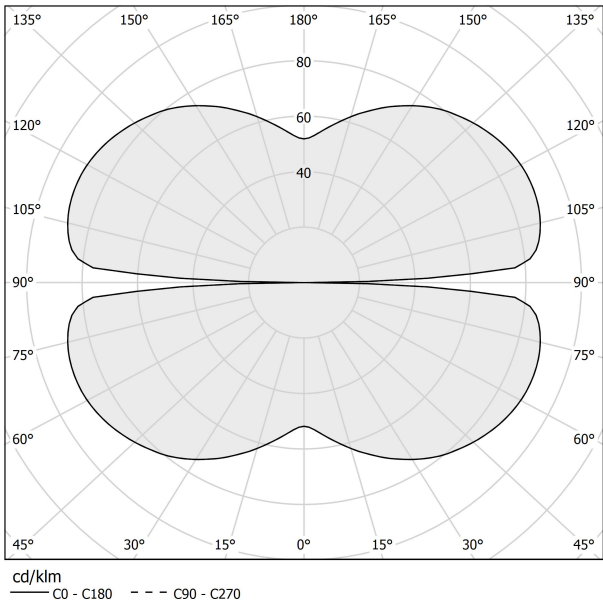

Zero Round

24V DC 24V  
M15301.075.0510

white




Data sheet

CODE	M15301.075.0510
SYSTEM POWER CONSUMPTION	24W
EFFICACY	127.46lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	3594lm
LUMEN OUTPUT	3059lm
EFFICIENCY	85.1%
WEIGHT	1,12 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	144,0 x 144,0 x 71,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

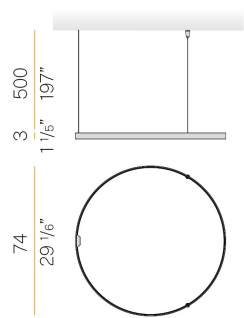

Polar diagram

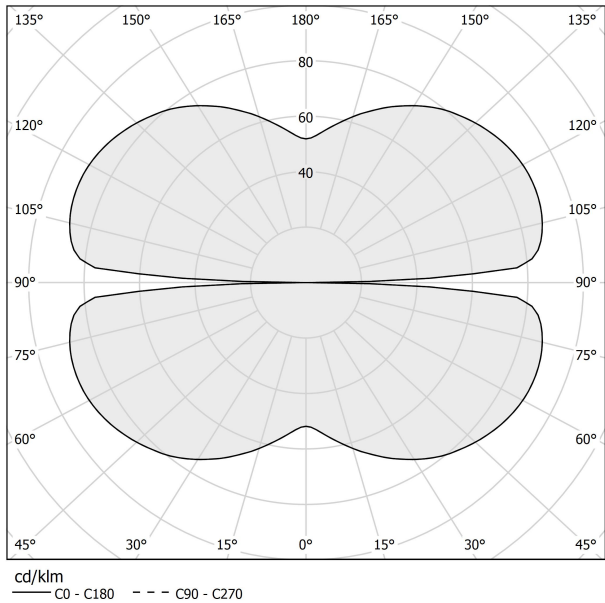

Zero Round

24V DC 24V  
M15301.100.0510

white




Data sheet

CODE	M15301.100.0510
SYSTEM POWER CONSUMPTION	33W
EFFICACY	123.6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	4792lm
LUMEN OUTPUT	4079lm
EFFICIENCY	85.1%
WEIGHT	1,43 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	124,0 x 124,0 x 51,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

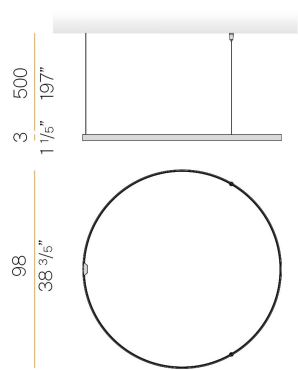

Polar diagram

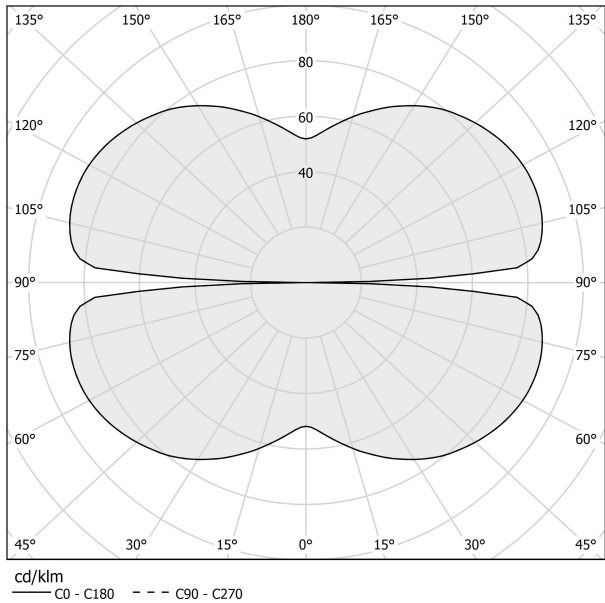

Zero Round

24V DC 24V  
M15501.125.0510

white




Data sheet

CODE	M15501.125.0510
SYSTEM POWER CONSUMPTION	41W
EFFICACY	124.37lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	5990lm
LUMEN OUTPUT	5099lm
EFFICIENCY	85.1%
WEIGHT	1,50 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	132,0 x 132,0 x 9,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

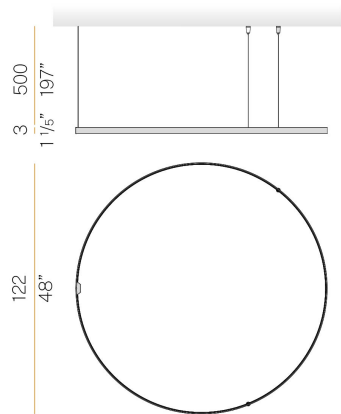

Polar diagram

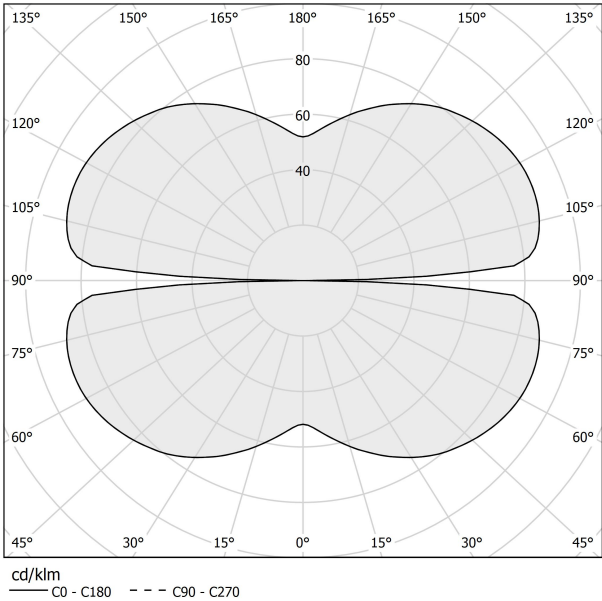

Zero Round


24V DC 24V  
M15501.150.0510

white




Data sheet

CODE	M15501.150.0510
SYSTEM POWER CONSUMPTION	48,5W
EFFICACY	127.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	7188lm
LUMEN OUTPUT	6120lm
EFFICIENCY	85.1%
WEIGHT	1,58 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	160,0 x 160,0 x 11,0 cm

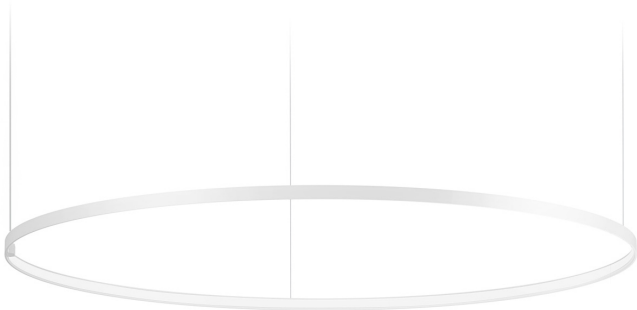


Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

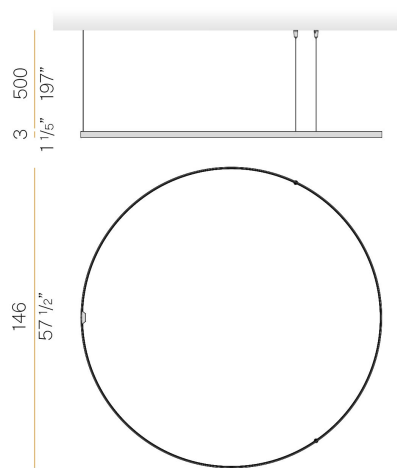

Polar diagram

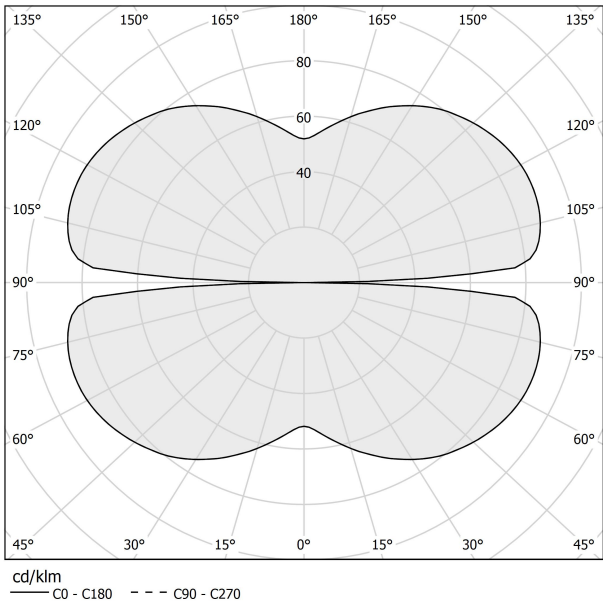

Zero Round

24V DC 24V  
M15501.200.0510

white




Data sheet

CODE	M15501.200.0510
SYSTEM POWER CONSUMPTION	65W
EFFICACY	125.51lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	9584lm
LUMEN OUTPUT	8158lm
EFFICIENCY	85.1%
WEIGHT	2,34 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	200,0 x 200,0 x 11,0 cm



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

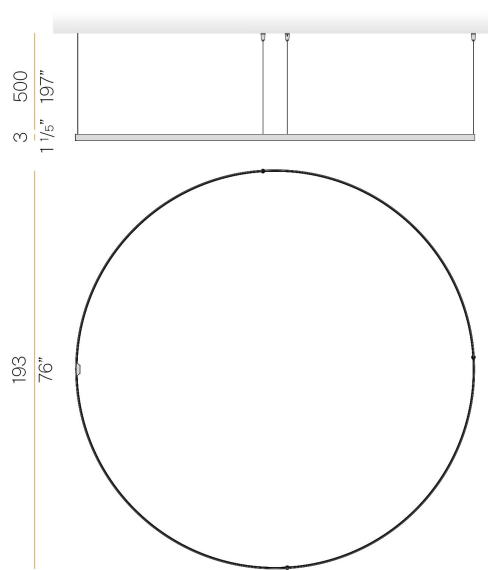

Polar diagram

