Project name: / Project type: /

PH 3/2 TABLE

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of mouth-blown opal three-layer glass, which is glossy on top and sandblasted matt on the underside, giving a soft and diffused light distribution.





Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.





American Heart Institute

Product info

Mounting

Cable type: Plastic cord with plug. Cable length: 2.1m. Light control: In-line switch on cord.

Finish

Brass metallised, black metallised or high lustre chrome plated. White opal glass.

Materials

Shades: Mouth-blown white opal glass. Top plate: Brass metallised, black metallised or high lustre chrome plated, spun brass. Base and stem: Brass metallised, black metallised or high lustre chrome plated, brass.

Sizes and weights

Width x Height x Length (mm) | 285 x 472 x 285 Max 3.0 kg

Class

Ingress protection IP20. Electric shock protection II w/o ground.

Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Related products





Product variants

Colour	Cable type	Light source
Black metallised	Black cord	-
Brass metallised	White cord	1x40W 1x40W E14
High lustre chrome plated		

louis poulsen louispoulsen.com

Product description

Portable fixture.

Terse and iconic design.

The size of the three shades is adjusted for optimum performance and comfort. Interior surfaces of glass shades sandblasted to diffuse light.

Member of a family products of various sizes and type.

Mounting

Portable fixture plugs into standard wall outet.

Light description

The fixture emits glare free, comfortable light.

Design

Poul Henningser

Material

Shades:mouth blown white glass, 1. 5mm (0. 06") thick.
Struts: chrome plated steel.
Base: steel with black or silver chrome-plated brass cover.
Stem: extruded steel, black or silver chrome plated, 1. 5mm (0. 06") thick.
Switch: on/off, phenolic, on base.

Socket: phenolic, candelabra base for G16. 5, frosted envelope lamps.

Weight


Min: 2.908 kg Max: 2.993 kg

Finish

Black metallised, Brass metallised, High lustre chrome plated

louis poulsen louispoulsen.com

Light distribution diagrams

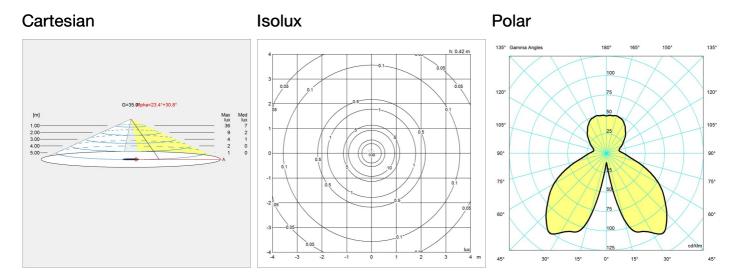

Spare parts & accessories

Product	Variant number
PH 3/2 Opal glass middle shade	5741481598
PH 3/2 Opal glass lower shade	5741481608
PH 3/2 Opal glass top shade	5741481585
PH 3/2 Amber glass top shade	5744162607
PH 3/2 Amber glass middle shade	5744162610
PH 3/2 Amber glass lower shade	5744162623
Finger screw SS M3X12 (3pcs) lower	5744610528
Finger screw SS M2X8 (3pcs) middle	5744611116
Finger screw brass raw M2X8 (3pcs)middle	5744611271
Finger screw brass raw M3X12 (3pcs)/ower	5744611284

louis poulsen louispoulsen.com