



PH HAT

The fixture emits indirect 100% glare-free light. The light emission depends on the angle of the screen, which can be tilted from 0° to about 67°. The shade is rose coloured on the inside, giving the light a warm tone.

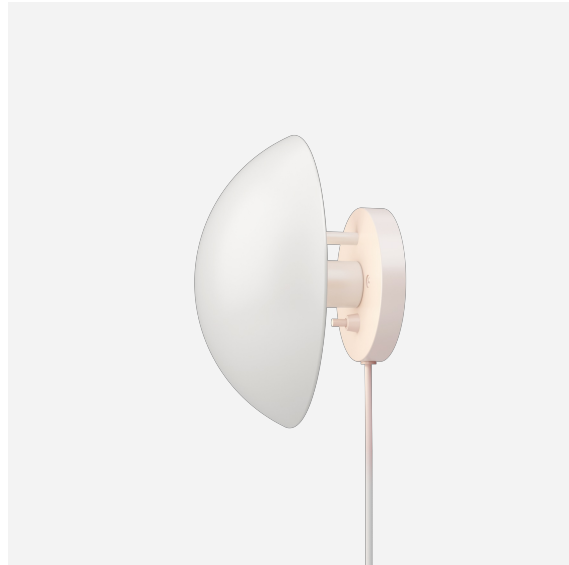

Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.

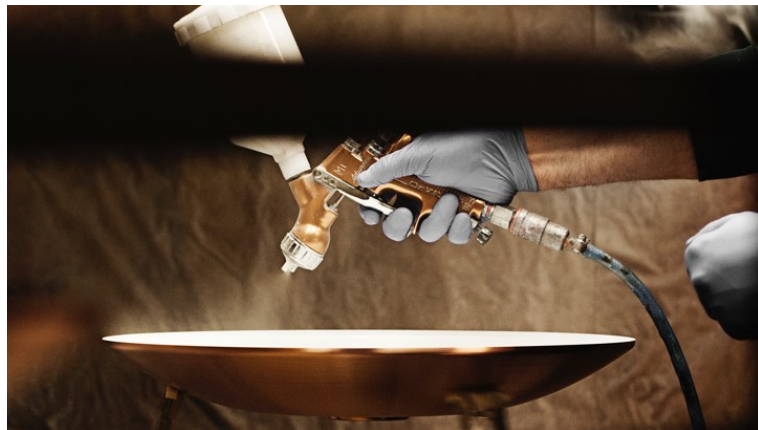

Product info

Information

The fixture is tiltable.

Mounting

Mounting with cord and plug or for hardwiring. With cord: Cord with plug. Cord length: 2.4m. Light control: On/off switch on wall box. Without cord for hardwiring: Wall bracket for mounting on wall. Light control: Two options. Either with on/off switch on wall box or without switch on wall box with turn on/off at main switch

Finish

The outer shade is white, wet painted. The inner shade is rose coloured, wet painted.

Materials

Shade: Spun steel. Wall box: Spun steel.

Sizes and weights

Width x Height x Length (mm) | 225 x 225 x 153 Max 1.8 kg

Class

Ingress protection IP20. With cord and plug: Electric shock protection II. For hardwiring: Electric shock protection I.

Specification notes


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Light source

1x20W E14

Information

The fixture is tiltable.

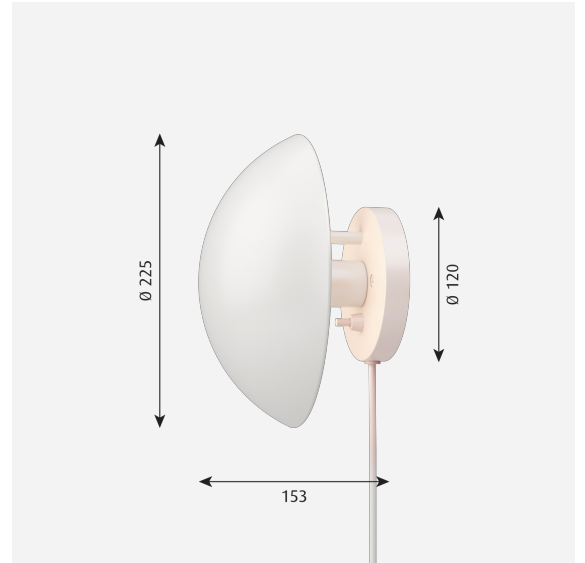

Product variants

Dimension	Cable type	Light source	Class	Switch
Ø 225	With cord	1x20W E14	I	With switch
	Without cord		II	Without switch

Design

Poul Henningsen

Weight

Min: 0.794 kg Max: 1.766 kg

Dimensions


Ø 225

Finish


White

Light distribution diagrams

Cartesian

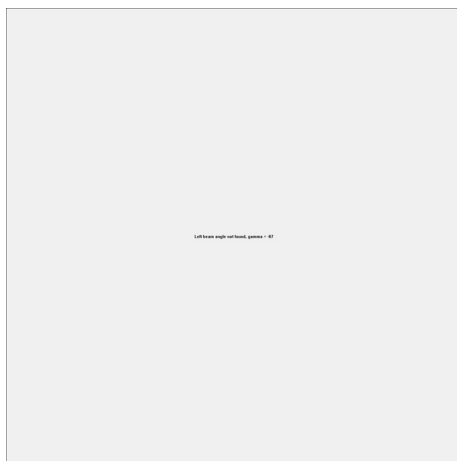

Isolux

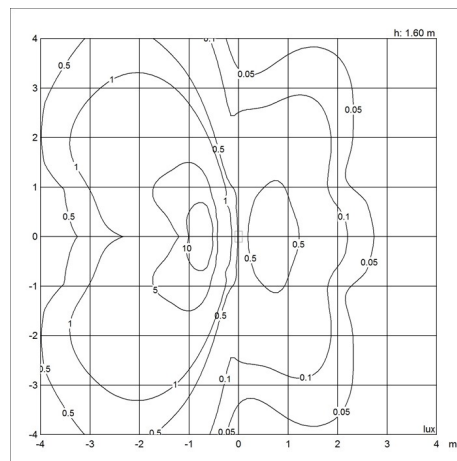

Polar

