


Technical data

Rated voltage	230V AC
Input voltage range	220 - 240 V AC
Driver output	-
Alimentation output	-
Class	2
IP	65
IK	-
Diffuser	Frosted glass
Bulb cover	No
Source	G9
Color temperature real output	-
Real light output	- lm
Total consumption	- W
Energy class	Classe de la lampe (non fournie)
Luminous efficacy	-
IRC	-
SDCM	-
Optic	-
Dimmable	-
Ta	-
Led lifetime	-
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
THDI	-
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

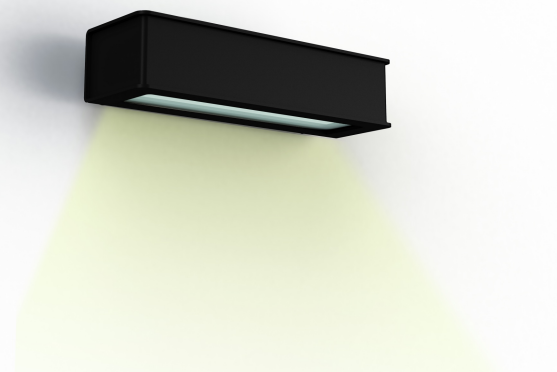

Plémo

catalogue 2024 p. 28

ref. 190001113

EAN. 3663660293051

Model ①



Materials and finishes

Material	aluminium
Colour	Velvet black - 113

Logistic data

Product dimensions	H.45 L.200 P.74
Net weight	0.610 Kg
Gross weight	0.650 Kg
Package dimensions 1	H.53 L.213 P.83


Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years

Technical data

Rated voltage	230V AC
Input voltage range	220 - 240 V AC
Driver output	-
Alimentation output	-
Class	2
IP	65
IK	-
Diffuser	Frosted glass
Bulb cover	No
Source	G9
Color temperature real output	-
Real light output	- lm
Total consumption	- W
Energy class	Classe de la lampe (non fournie)
Luminous efficacy	-
IRC	-
SDCM	-
Optic	-
Dimmable	-
Ta	-
Led lifetime	-
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
THDI	-
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

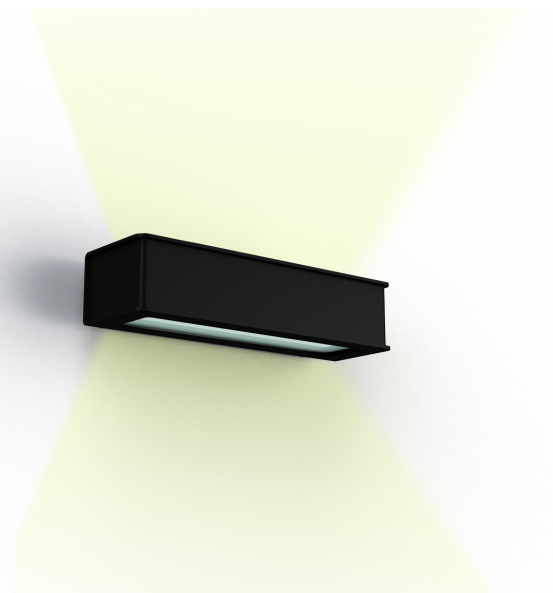

Plémo

catalogue 2024 p. 28

ref. 190002113

EAN. 3663660292870

Model 2



Materials and finishes

Material	aluminium
Colour	Velvet black - 113

Logistic data

Product dimensions	H.45 L.200 P.74
Net weight	0.560 Kg
Gross weight	0.620 Kg
Package dimensions 1	H.53 L.213 P.83

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years