

**erluna**

**suri midi  
adjustable  
origin**

**circular product**



IP65  
IP54





UK  
CA



# suri midi adjustable

## origin

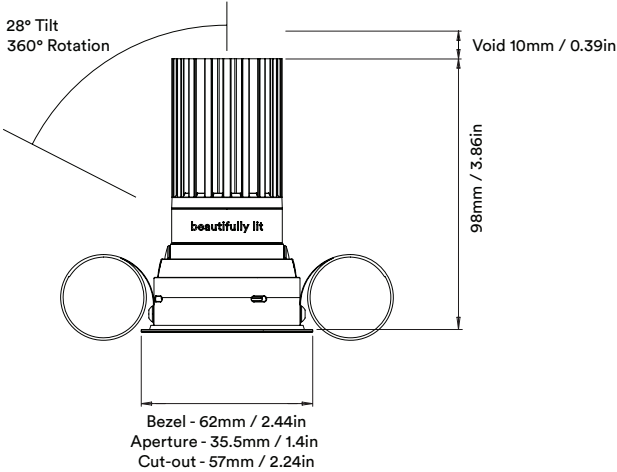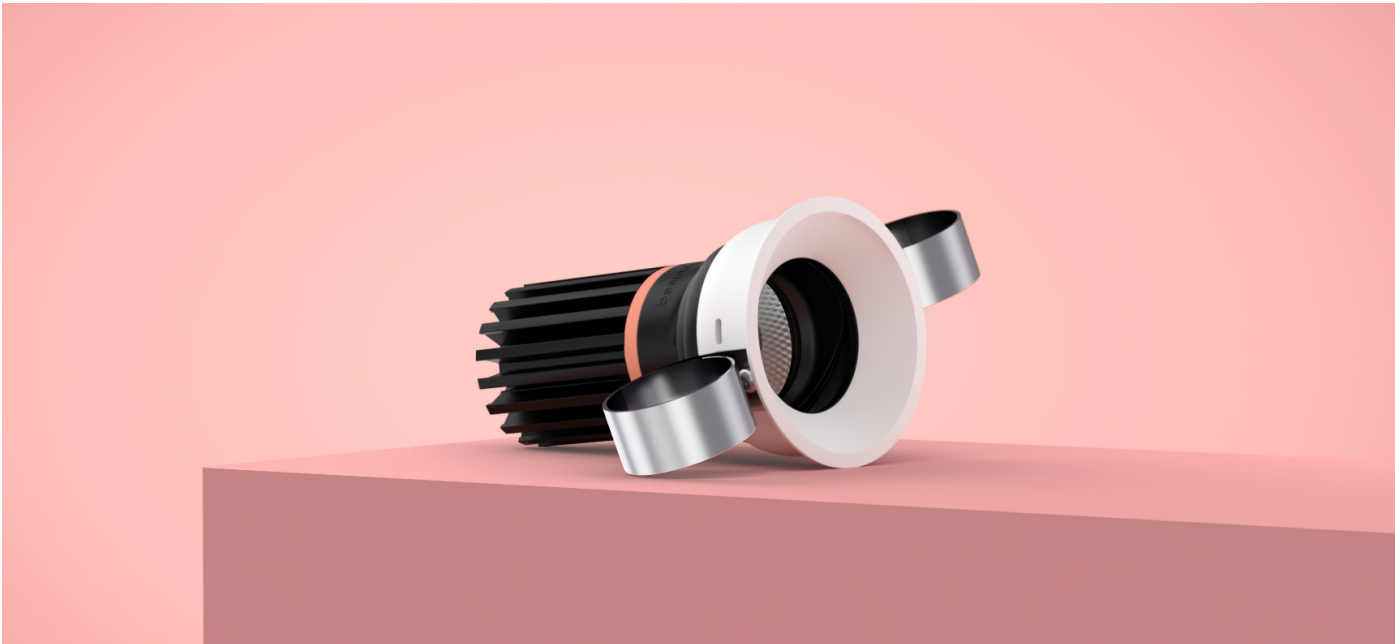

# suri midi adjustable origin


---

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

**1**

The fully repaired and tested product enters back into our stock –with a brand new warranty.

**3**

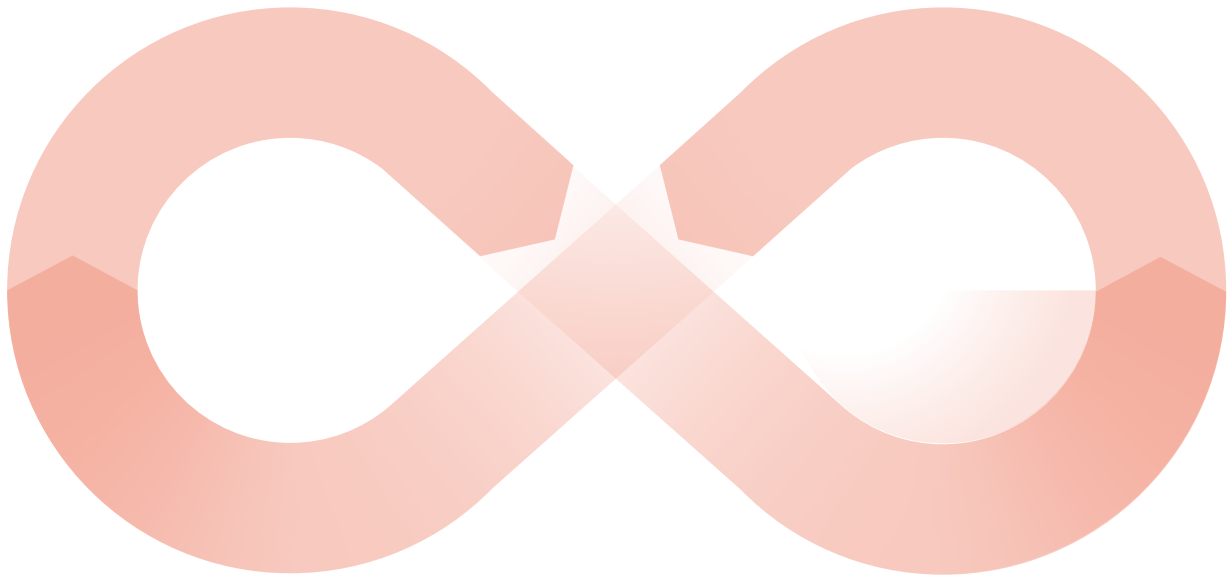

The 'new' light fitting is despatched to a new customer.

**4**

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

**2**



---

**circular product**

**orluna**



suri midi adjustable  
origin

circular product

|              |                     | 2700K |        |        |      |       |
|--------------|---------------------|-------|--------|--------|------|-------|
|              |                     | SOFT  |        |        |      |       |
| LIGHT VALUES |                     | Spot  | Narrow | Medium | Wide | Flood |
|              | Beam Width FWHM     | 12°   | 18°    | 24°    | 37°  | 45°   |
|              | Source Lumens       | 925   | 925    | 925    | 925  | 925   |
|              | Engine Lumens       | 358   | 687    | 724    | 731  | 732   |
|              | Luminaire Lumens    | 329   | 609    | 669    | 685  | 682   |
|              | Source Lm/CW *1     | 95    | 95     | 95     | 95   | 95    |
|              | Luminaire Lm/CW *2  | 34    | 63     | 69     | 71   | 70    |
|              | Luminiare Cd        | 4190  | 4496   | 3583   | 1785 | 1244  |
| POWER        | Voltage             | 34.6V |        |        |      |       |
|              | Drive Current       | 250mA |        |        |      |       |
|              | Circuit Power (typ) | 9.7W  |        |        |      |       |

\*1 Part L1 (Residential) \*2 Part L2 (Commercial)

|              |                     | 3000K |        |        |      |       |
|--------------|---------------------|-------|--------|--------|------|-------|
|              |                     | SOFT  |        |        |      |       |
|              |                     | Spot  | Narrow | Medium | Wide | Flood |
| LIGHT VALUES | Beam Width FWHM     | 12°   | 18°    | 24°    | 37°  | 45°   |
|              | Source Lumens       | 988   | 988    | 988    | 988  | 988   |
|              | Engine Lumens       | 382   | 734    | 773    | 781  | 782   |
|              | Luminaire Lumens    | 351   | 650    | 715    | 732  | 729   |
|              | Source Lm/CW *1     | 102   | 102    | 102    | 102  | 102   |
|              | Luminaire Lm/CW *2  | 36    | 67     | 74     | 76   | 75    |
|              | Luminiare Cd        | 4476  | 4804   | 3827   | 1907 | 1329  |
|              |                     |       |        |        |      |       |
| POWER        | Voltage             | 34.6V |        |        |      |       |
|              | Drive Current       | 250mA |        |        |      |       |
|              | Circuit Power (typ) | 9.7W  |        |        |      |       |

\*1 Part L1 (Residential) \*2 Part L2 (Commercial)

| DRIVER | Binning           | SDCM (Hot)                         | 2                             |
|--------|-------------------|------------------------------------|-------------------------------|
|        | CRI (typ)(R9)     |                                    | 98 (99)                       |
|        | TM30 Rf Rg        |                                    | Rf 93.8 Rg 101.9              |
|        | Lifetime (TM21)   |                                    | L90 B5 50,000hrs (inc driver) |
|        | Protocols         | Mains Dim / DALI / 0-10V / Non-dim |                               |
| DRIVER | Dim to Dark       | 0.1% Lux                           |                               |
|        | Distance from LED | 20m / 65' (series wiring)          |                               |
|        | Emergency         | Emergency packs available          |                               |

SPECIFICATION CODE

| Engine type | Bezel | Colour Temp              | Driver                                                                 | Beam Width                                                    | Bezel Colour                                                                                                                                                                                                                                            | Baffle Colour                                                                                                                                                                | Options                                                                                                                           |
|-------------|-------|--------------------------|------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| OR          | SURD  | 27                       | M                                                                      | M                                                             | W                                                                                                                                                                                                                                                       | BB                                                                                                                                                                           | 54 H                                                                                                                              |
|             |       | 27 / 2700K<br>30 / 3000K | M / Mains Dim<br>D / DALI<br>O / 0-10v<br>N / Non Dim<br>X / No Driver | S / Spot<br>N / Narrow<br>M / Medium<br>W / Wide<br>F / Flood | W / White 9010<br>D / White RAL 9003<br>B / Black RAL 9005<br>C / Other RAL<br>G / Polished Brass<br>K / Brushed Chrome<br>L / Polished Chrome<br>Z / Other Metallic<br>V / Dark Bronze<br>T / Medium Bronze<br>R / Light Bronze<br>Y / Burnished Brass | BB / Black 9005<br>WB / White RAL 9010<br>DB / White RAL 9003<br>CB / Other RAL<br>GB / Polished Brass<br>KB / Brushed Chrome<br>LB / Polished Chrome<br>ZB / Other Metallic | 54 / IP54<br>65 / IP65<br>H / Honeycomb Louvre<br>K / Click Connector<br>Z / LSZH Cable<br>E / Emergency<br>F / 60 min Fire Rated |