

Image shown above 28.6 Floor

Series 28, 38V, 57, 73, 84, 84V, 118

Glass Colours 28: Clear, colour pendants
38V: Clear
57: Grey, white, light mirror, dark mirror
73: Clear, grey 1, grey 2, grey 3
84: Clear/copper
84V: Clear/copper
118: White

Lamp 1W LED, 2700K, 100lm (2500K and 3000K options available)

Plug Types Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

Base Ø330mm

Cable Length 2290mm black flexible cord

Finishes Brass or black powder coated stem
Unlacquered brass or black powder coated base
Brass dial control

Materials Blown glass, brass stem, electrical components

Power Supply Integral, dial control with build-in dimmer

Environment Indoor, dry location. IP20

Note The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # 28: US D687,740
EU 001695834-001 to 004
38V: EU 002071019-001
57: US D796732
EU 002268581-0001 to 0006
73: US D762,323 S
EU 002633230-0001 - 0003
84: EU 003611144-0001 to 0004
118: Worldwide patents pending.


Certifications



Weight (kg)


| | XXX.3 (900mm) | XXX.3 (1800mm) | XXX.6 (1800mm) |
|------------|------------------|-------------------|-------------------|
| 28 | 9.8 | 10.8 | 14.5 |
| 38V | 12.2 | 13.2 | 19.4 |
| 57 | 10.3 | 11.3 | 15.6 |
| 73 | 11.3 | 12.3 | 17.5 |
| 84 | 11.5 | 12.6 | 18 |
| 84V | 12.5 | 13.5 | 19.9 |
| 118 | 12.5 | 13.5 | 20 |

28




± Ø165

38V




Ø190 - 215

57



100 - 150

73



± 230 - 380

± 120 - 150

84



± Ø100 - 120

± 110 - 120


84V




Ø125 - 140

± 90

118



± Ø140 - 160

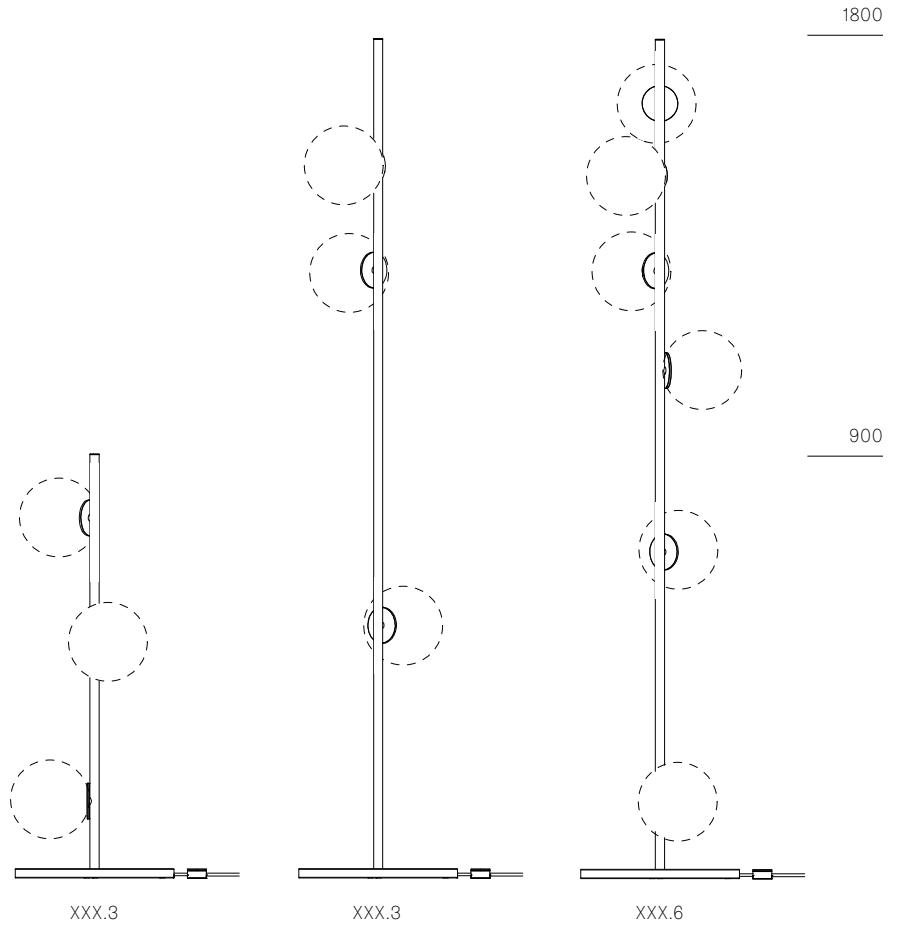


PLUG TYPES



Type A



Type C



Type G



Type I

All dimensions are in millimeters (mm) unless otherwise specified.