

FLOS

■ F6496030 Black

String Light - Sphere head - 22mt cable

Designed by Michael Anastassiades, 2014




21W - 1515lm - 2700K

Suspension lamp providing diffused light. Black, white or blue varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 22 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in black varnished PC. The on/off switch is electronic with optical and touch dimm mechanism included or touch dimm and CASAMBI Ready version. Dimmer included. Compulsory to add either floor switch or ceiling/wall rose.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

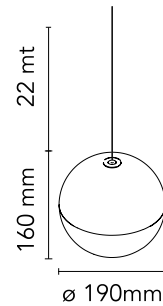

Main specifications

EAN	8059607041536
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Colour	Black
Cord length (mm)	22000
Net weight (kg)	1.27
Package height (mm)	300
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-----------------------

Technical Drawings

Bim	↓ ZIP
---------------------	-----------------------



Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only)
light source by a
professional

Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED voltage Vf (Vdc)	null
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No
Charging min time	No

Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

F6484030

String Light Floor switch



OPTIONAL

F6485030

String Light Kit cable

Spare Parts



- | | | |
|-----|---|-----------|
| 01. | Kit with white hooks and white cable clamps | RF6480109 |
| 01. | String Light black hooks & cable clamps 5-unit kit | RF6480130 |
| 02. | Power supply unit for led | RF22934 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RF6480200 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RFU648200 |



RF6480109

Kit with white hooks and white cable clamps



RF6480130

String Light black hooks & cable clamps 5-unit kit




RF22934

Power supply unit for led



RF6480200

Kit with allen key and screws for ceiling rose assembly



RFU648200

Kit with allen key and screws for ceiling rose assembly

FLOS

■ F6497030 Black

String Light - Cone head - 22mt cable

Designed by Michael Anastassiades, 2014




21W - 1035lm - 2700K

Suspension lamp providing diffused light. Black, white or blue varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 22 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in black varnished PC. The on/off switch is electronic with optical and touch dimm mechanism included or touch dimm and CASAMBI Ready version. Dimmer included. Compulsory to add either floor switch or ceiling/wall rose.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607041567
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Colour	Black
Cord length (mm)	22000
Net weight (kg)	1.15
Package height (mm)	300
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-----------------------

Technical Drawings

Bim	↓ ZIP
---------------------	-----------------------



Schematic light drawing



Luminous flux Luminaire
1035 lm

Photometric


Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED voltage Vf (Vdc)	null
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

F6484030

String Light Floor switch



OPTIONAL

F6485030

String Light Kit cable

Spare Parts



- | | | |
|-----|---|-----------|
| 01. | Kit with white hooks and white cable clamps | RF6480109 |
| 01. | String Light black hooks & cable clamps 5-unit kit | RF6480130 |
| 02. | Power supply unit for led | RF22934 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RF6480200 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RFU648200 |

DOWNLOAD



RF6480109
Kit with white hooks and white cable clamps




RF6480130
String Light black hooks & cable clamps 5-unit kit



RF22934
Power supply unit for led



RF6480200
Kit with allen key and screws for ceiling rose assembly



RFU648200
Kit with allen key and screws for ceiling rose assembly

FLOS

■ F6498030 Black

String Light - Sphere head - 22mt cable - CASAMBI Ready

Designed by Michael Anastassiades, 2014




21W - 1515lm - 2700K

Suspension lamp providing diffused light. Black, white or blue varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 22 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in black varnished PC. The on/off switch is electronic with optical and touch dimm mechanism included or touch dimm and CASAMBI Ready version. Dimmer included. Compulsory to add either floor switch or ceiling/wall rose.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8059607042281
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Colour	Black
Cord length (mm)	22000
Net weight (kg)	1.27
Package height (mm)	300
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-------

Technical Drawings

🔒 Bim	↓ ZIP
-------	-------




Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only)
light source by a
professional

Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED voltage Vf (Vdc)	null
Driver	Remote excluded
Dimming type	Electronic 48V
Batteries inside	No
Charging min time	No

Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

F6484030

String Light Floor switch




OPTIONAL

F6485030

String Light Kit cable

Spare Parts

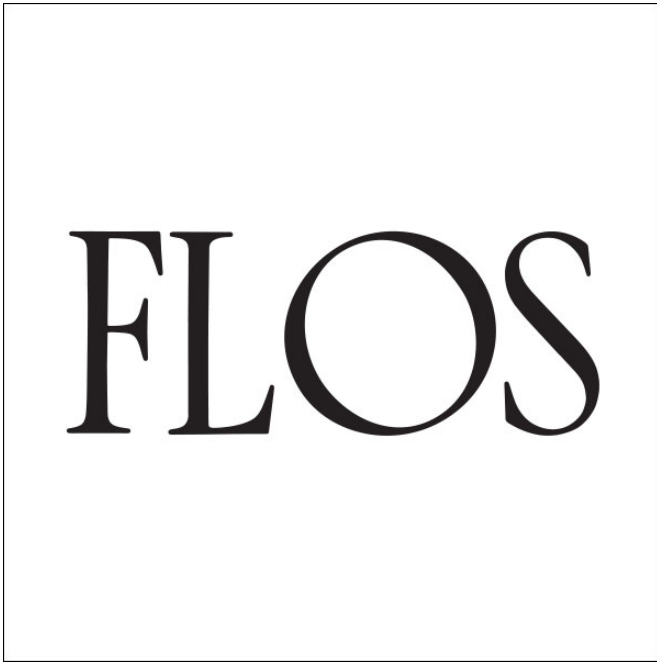

- | | | |
|-----|---|-----------|
| 01. | Kit with white hooks and white cable clamps | RF6480109 |
| 01. | String Light black hooks & cable clamps 5-unit kit | RF6480130 |
| 02. | Power supply unit for led | RF22934 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RF6480200 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RFU648200 |

DOWNLOAD



RF6480109
Kit with white hooks and white cable clamps




RF6480130
String Light black hooks & cable clamps 5-unit kit



RF22934
Power supply unit for led



RF6480200
Kit with allen key and screws for ceiling rose assembly



RFU648200
Kit with allen key and screws for ceiling rose assembly

FLOS

■ F6499030 Black

String Light - Cone head - 22mt cable - CASAMBI Ready

Designed by Michael Anastassiades, 2014




21W - 1035lm - 2700K

Suspension lamp providing diffused light. Black, white or blue varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 22 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in black varnished PC. The on/off switch is electronic with optical and touch dimm mechanism included or touch dimm and CASAMBI Ready version. Dimmer included. Compulsory to add either floor switch or ceiling/wall rose.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8059607042298
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Colour	Black
Cord length (mm)	22000
Net weight (kg)	1.15
Package height (mm)	300
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-------

Technical Drawings

🔒 Bim	↓ ZIP
-------	-------



Schematic light drawing



Luminous flux Luminaire
1035 lm

Photometric


Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED voltage Vf (Vdc)	null
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

F6484030

String Light Floor switch



OPTIONAL

F6485030

String Light Kit cable

Spare Parts



- | | | |
|-----|---|-----------|
| 01. | Kit with white hooks and white cable clamps | RF6480109 |
| 01. | String Light black hooks & cable clamps 5-unit kit | RF6480130 |
| 02. | Power supply unit for led | RF22934 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RF6480200 |
| 03. | Kit with allen key and screws for ceiling rose assembly | RFU648200 |

DOWNLOAD



RF6480109
Kit with white hooks and white cable clamps




RF6480130
String Light black hooks & cable clamps 5-unit kit



RF22934
Power supply unit for led



RF6480200
Kit with allen key and screws for ceiling rose assembly



RFU648200
Kit with allen key and screws for ceiling rose assembly

FLOS

■ F6482030 Black

String Light Rose

Designed by Michael Anastassiades, 2014



Wallrose. Feed up 3 heads maximum; 3 wayout for cables. Wall or ceiling installation. Space to wrap 10 meters cable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

Mounting instructions




Main specifications

EAN	8059607022382
Mounting	Wall
Environments	Indoor dry location
Power (W)	70

Physical

Colour	Black
Net weight (kg)	0.3
Package height (mm)	60
Package width (mm)	140
Package length (mm)	120
IP internal	20

Ecodesign and Energy Labelling



Replaceable control gear by a professional



Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120-277/48
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimming type	Electronic 48V
Batteries inside	No

FLOS

■ F6484030 Black

String Light Floor switch

Designed by Michael Anastassiades, 2014



Floor Switch. Feed up two heads maximum; 2 wayout for cables. Space to wrap 10 meters cable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

Mounting instructions




Main specifications

EAN	8059607022399
Mounting	Floor
Environments	Indoor dry location
Power (W)	70

Physical

Colour	Black
Net weight (kg)	0.82
Package height (mm)	240
Package width (mm)	180
Package length (mm)	200
Package volume (m3)	0.01
IP internal	20

Ecodesign and Energy Labelling



Replaceable control gear by a professional



Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120-277/48
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimming type	Electronic 48V
Plug type	Type C
Batteries inside	No