


# TOLDBOD 220 WALL

The light is directed 100% downwards and the shade has a matt white painted interior emitting a soft, diffused, comfortable light. The fixture fulfills full cut-off criteria.

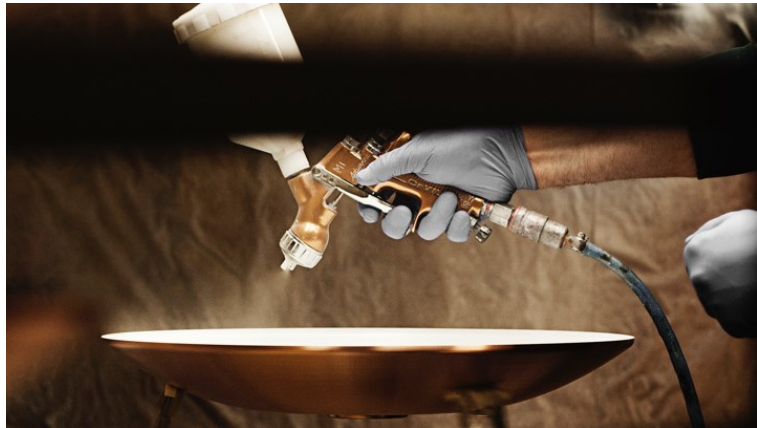

## Product info

### Information

The wall box and arm are painted in the same colour as the fixture head.

### Mounting

Terminal block: 1x3x2.5 mm<sup>2</sup>. Cable entries: 3x rear entries and 2x knock outs in bottom to Ø 10-14.5 mm cable. Looping: Approved, max. 3x1,5 mm<sup>2</sup>.

### Finish

Aluminium coloured with textured surface or black with textured surface, powder coated.

### Materials

Fixture head: Die cast aluminium. Shield: Injection moulded clear polycarbonate. Wall box: Die cast aluminium. Arm: Extruded aluminium.

### Sizes and weights


Width x Height x Length (mm) | 220 x 225 x 345 Max 3.6 kg

### Class

IP43. IK09. Electric shock protection I w. ground.

### Information

The wall box and arm are painted in the same colour as the fixture head.

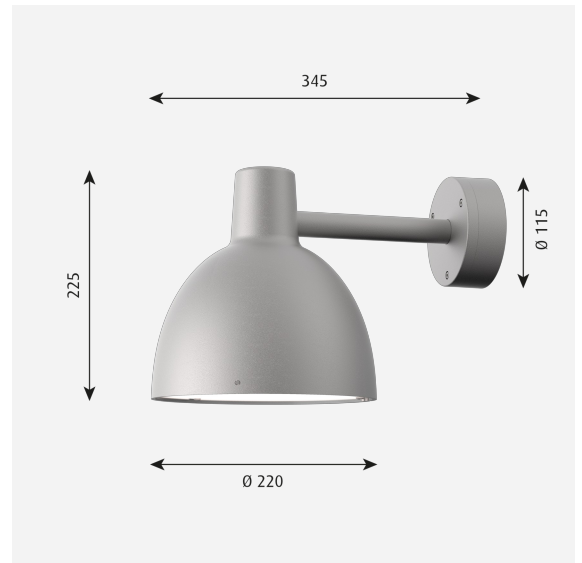


## Related products




Toldbod Pendant




Toldbod 155/220 Glass Pendant



Toldbod 290 Wall



Toldbod 155 Bollard



Toldbod 155 Wall



Toldbod 290 Post



Toldbod 290 LED Upgrade Kit

## Product variants

Dimension	Colour	Light source	Lighting control
Ø 220	<input type="radio"/> Aluminium colour texture <input type="radio"/> Black texture	-  1x100W E27	-  Dac: dali + clo Dpc: nightdim + clo

## Design

Louis Poulsen A/S

---

## Weight

Min: 3.523 kg Max: 3.578 kg

---

## Dimensions

Ø 220

---

## Finish

Aluminium colour texture, Black texture