



WOHLERT

The fixture provides uniform, general and diffused illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.



Vilhelm Wohlert

Vilhelm Wohlert (1920-2007) graduated as an architect from The Royal Danish Academy of Fine Arts in Copenhagen in 1944. During his career, he held the position of professor at The Royal Danish Academy of Fine Arts in Copenhagen from 1968 until 1986, was an Honorary Member of the same institution, where he was also Deputy CEO in the period 1968-71.

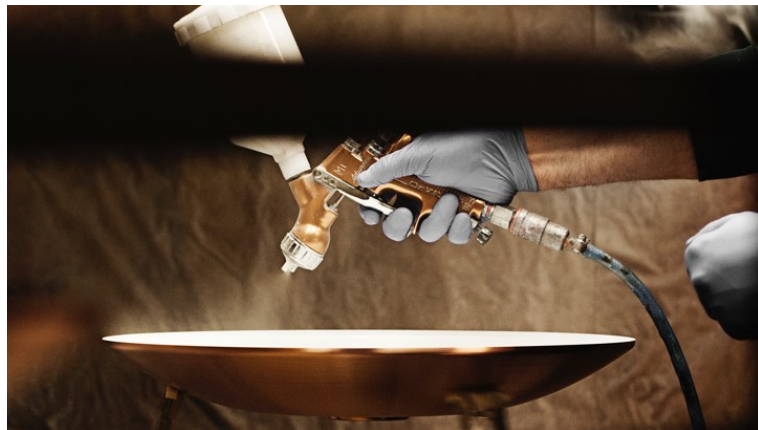

Product info

Mounting

Suspension type E27: Cable 3x0,75mm². Canopy: Yes. Cable length: 3m. Suspension type LED: Cable 2x1,5mm². Canopy: Yes. LED canopy contains driver. Cable length: 4m.

Finish

Matt white opal glass.

Materials

Shade: Mouth-blown matt white opal glass. Pendant tube: Brushed steel.

Sizes and weights


Width x Height x Length (mm) | 350 x 370 x 350 Max 4.8 kg | 300 x 320 x 300 Max 2.9 kg | 400 x 420 x 400 Max 4.8 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.

Light source

1x70W E27

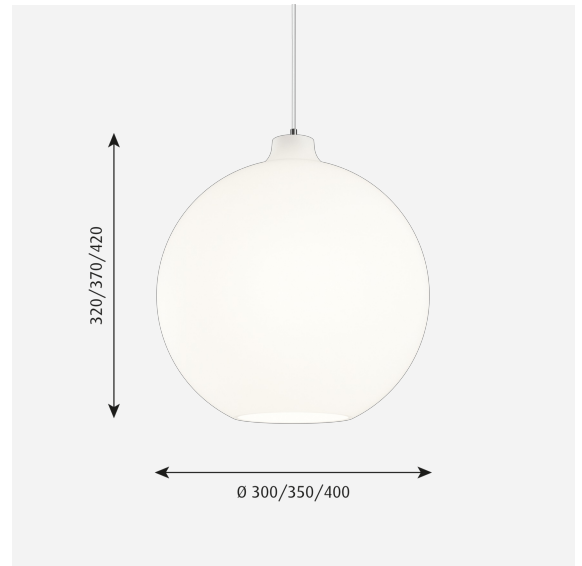

Product variants

Dimension	Light source	Lumen	Lighting control
Ø 300	1x70W E27	-	-
Ø 350	LED 3000-1800K D2W 41W	2955	Dali
Ø 400	LED 3000K 41W	2981	Phase dimming (mains dimm)
		3587	Wireless bluetooth
		3617	

Product description

Suspended glass luminaire
Iconic design
Family of three dimensions

Mounting

Can be mounted on 4" octagonal junction box. (USA only)

Light description

360° distribution
Glare-free

Design

Vilhelm Wohlert

Material

Shade: matte opal, mouth-blown glass.
Stem: brushed aluminum
Socket (incandescent): Porcelain, medium base, for A-23 frosted envelope lamps.
Socket (compact fluorescent): Polycarbonate, GX24q-3/4 base, for 4-pin compact fluorescent lamps.
Canopy (incandescent): 5. 3" diameter x 0. 9" tall cone of spun aluminum. Canopy (fluorescent): 6. 6" diameter x 2. 7" tall cone of spun aluminum.
Cable: white PVC coated, 12 ft. (USA)
For compact fluorescent variant: electronic ballast for 120-277V operation housed inside canopy. (USA only)

Weight

Min: 2.922 kg Max: 4.801 kg

Dimensions


Ø 300, Ø 350, Ø 400

Finish


White opal glass

Light distribution diagrams


Cartesian

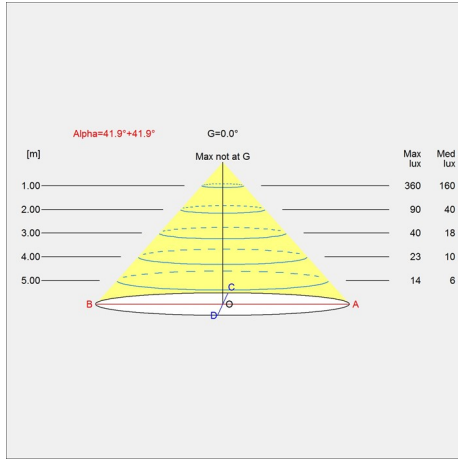

Isolux

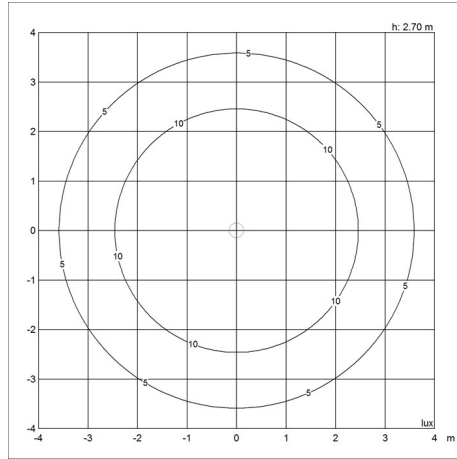

Polar

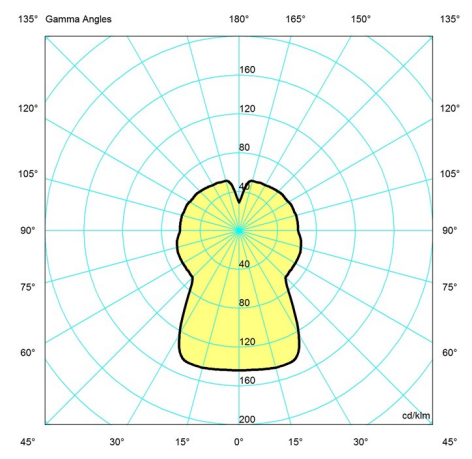

Spare parts & accessories

Product	Variant number
Canopy White 2-part tophat ©	5749329034
Wohlerlert Ø300 glass	5741480382
Wohlerlert Ø350 glass	5741480395
Wohlerlert Ø400 glass	5741480405