
ELLISSE PENDANT DOUBLE

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

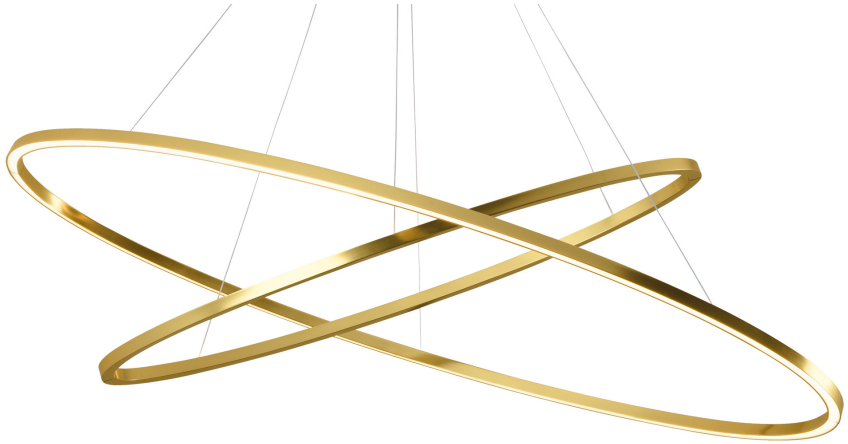

2700K

LAMPING

Source	linear LED
Total power	85W
Emission	diffused uplight (minor), diffused downlight (major)
Switching	dimmable, DALI push
Tension	110-240V
Color temperature	2700K
Luminous flux	2825+1850lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)


Codes	*Structure*
ELP LW2 56	white
ELP LN2 56	black
ELP LO2 56	gold painted
ELP LL2 56	polished aluminium
ELP LGW 56	gold polished anodized

PACKAGE

Package 01	Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni



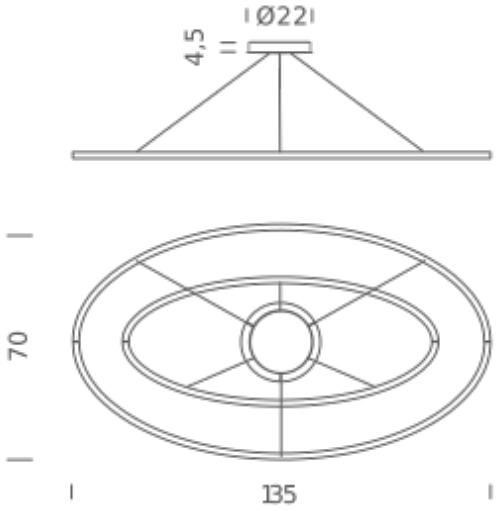

3000K

LAMPING

Source	linear LED
Total power	85W
Emission	diffused uplight (minor), diffused downlight (major)
Switching	dimmable, DALI push
Tension	110-240V
Color temperature	3000K
Luminous flux	2825+1850lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)

Codes	*Structure*
ELP LWW 56	white
ELP LNW 56	black
ELP LOW 56	gold painted
ELP LLW 56	polished aluminium

PACKAGE

Package 01	Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni



