

# LUX SPOT

The LUX collection, characterized by small spots for outdoor applications, is enriched with more powerful versions to meet the need for a more powerful lighting.

Lux Spot, is available in different lumen package dedicated to specific application needs, finishes, color temperatures and beam angles.

Bracket to install the spot and adjust the orientation. The spot can be installed also using a ground spike.



4,2W | 3000K - 17°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801N21WAA  
BLUS1801N21WAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

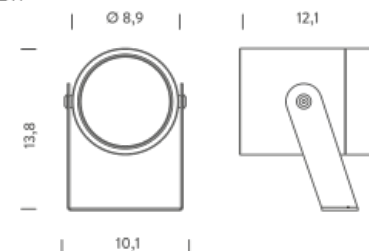

4,2W | 3000K - 46°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801F21WAA  
BLUS1801F21WAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

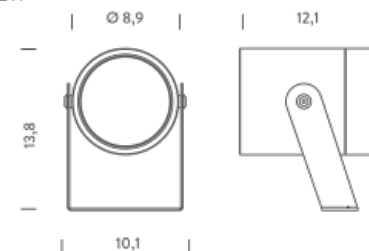

4,2W | 4000K - 17°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801N21NAA  
BLUS1801N21NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

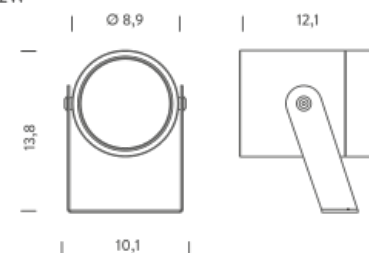

4,2W | 4000K - 46°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801F21NAA  
BLUS1801F21NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg

## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

