

LUX W-S

LUX W is a spots collection suitable for accent and decorative lighting of façades. Spots are made from anodized aluminium in either natural grey or black finish. Available with single and double light emission and in various colour temperatures and optic beams. The body is rotatable during installation and allows the adjustment of the light to adhere to specific project needs. The product features a color rendering index higher than 90 and an onboard driver.



3000K | 17°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 366lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101N21WAA
BLUW4101N21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

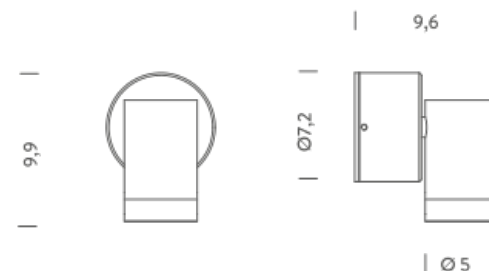

3000K | 46°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 372lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101F21WAA
BLUW4101F21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

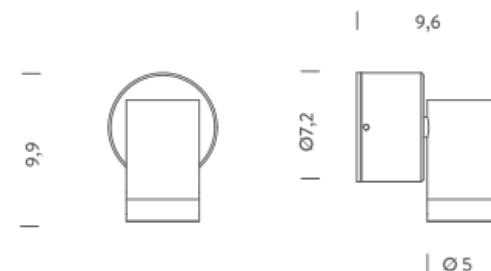

4000K | 17°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 366lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101N21NAA
BLUW4101N21NAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

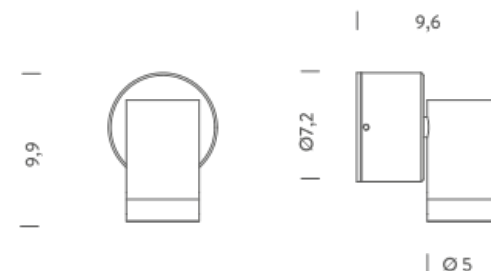

4000K | 46°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 372lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101F21NAA
BLUW4101F21NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

