


Rastaf 86 Fix - Led GU10 - White

Studio Artemide



IP20  

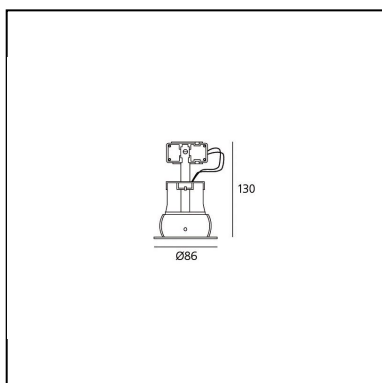

LUMINAIRE

- Watt: **5,5W**
- Voltage: **230-240V**
- Delivered lumen output: **286lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **57.11lm/W**
- CRI: **90**

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M047900**
- Colour: **White**
- Installation: **Recessed**
- Material: **Steel**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **130 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Recessed depth: **130 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.15**
- Glow Wire Test: **960°**

SOURCES NOT INCLUDED

- Category: **LED RETROFIT**
- Number: **1**
- Watt: **4W**
- Wattage (Single): **4W**
- Color temperature (K): **3000K**
- Voltage: **230-240V**
- CRI: **85**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILING M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 20° - fixed optic - 2700K- White

Studio Artemide



IP20 / 44  

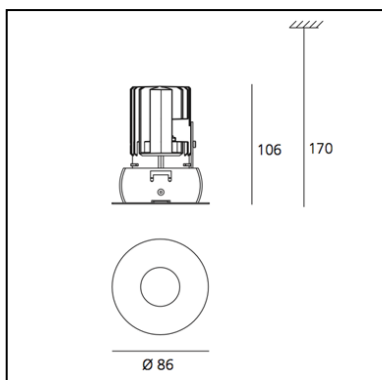

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **391lm**
- CCT: **2700K**
- Efficiency: **30%**
- Efficacy: **32.57lm/W**
- CRI: **90**

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038200**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **106 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **2700K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 32° - fixed optic - 2700K - White

Studio Artemide



IP20 / 44  

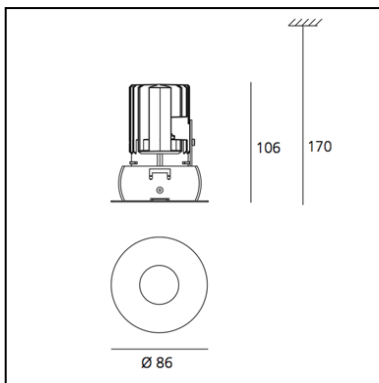

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **311lm**
- CCT: **2700K**
- Efficiency: **24%**
- Efficacy: **25.88lm/W**
- CRI: **90**

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038300**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **106 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **2700K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300






RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 20° - fixed optic - 3000K - White

Studio Artemide



IP20 / 44  

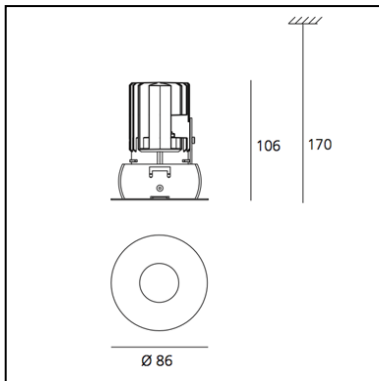

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **408lm**
- CCT: **3000K**
- Efficiency: **30%**
- Efficacy: **34.03lm/W**
- CRI: **90**

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038500**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **106 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **3000K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




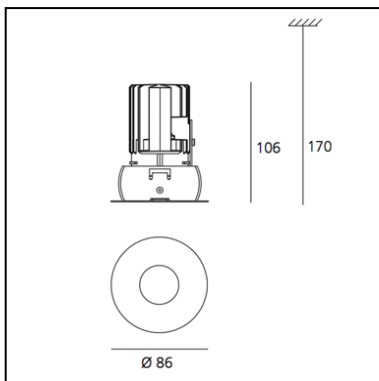
RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 32° - fixed optic - 3000K- White

Studio Artemide



IP20 / 44  



LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **325lm**
- CCT: **3000K**
- Efficiency: **24%**
- Efficacy: **27.04lm/W**
- CRI: **90**

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038700**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **106 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **3000K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Adjustable - Led GU10 - White

Studio Artemide



IP20  

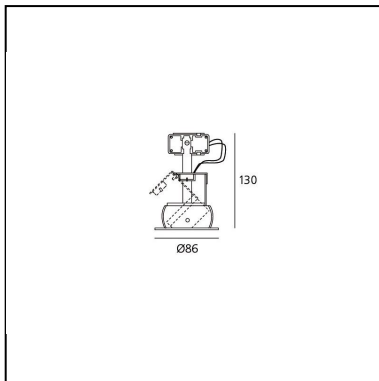

LUMINAIRE

- Watt: **5,5W**
- Voltage: **230-240V**
- Delivered lumen output: **286lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **57.11lm/W**
- CRI: **90**

Notes

Tilt angle: 45°

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights ø86mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M047905**
- Colour: **White**
- Material: **Steel**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **130 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Recessed depth: **130 mm**
- Inclination: **450 mm**
- Cutout shape: **Rounded**
- Weight: **kg 0.15**
- Glow Wire Test: **960°**

SOURCES NOT INCLUDED

- Category: **LED RETROFIT**
- Number: **1**
- Watt: **4W**
- Wattage (Single): **4W**
- Color temperature (K): **3000K**
- Voltage: **230-240V**
- CRI: **85**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILING M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 20° - adjustable optic - 2700K- White

Studio Artemide



IP20  

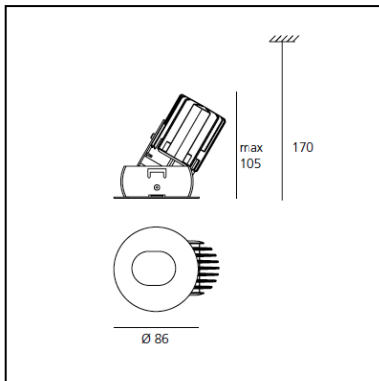

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **391lm**
- CCT: **2700K**
- Efficiency: **30%**
- Efficacy: **32.57lm/W**
- CRI: **90**

Notes

Tilt angle:
Sheet metal panel support (1mm): 34°
Plasterboard support (12.5mm): 29°
Double plasterboard support (25mm): 26°

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights ø86mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038205**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **105 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Rotation: **450 mm°**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **2700K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 32° - adjustable optic - 2700K - White

Studio Artemide



IP20  

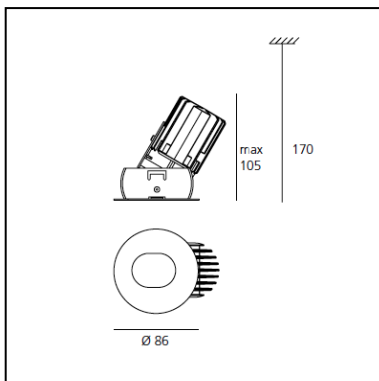

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **311lm**
- CCT: **2700K**
- Efficiency: **24%**
- Efficacy: **25.88lm/W**
- CRI: **90**

Notes

Tilt angle:
Sheet metal panel support (1mm): 34°
Plasterboard support (12.5mm): 29°
Double plasterboard support (25mm): 26°

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights ø86mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038305**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **105 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Rotation: **450 mm°**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **2700K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 20° - adjustable optic - 3000K - White

Studio Artemide



IP20  

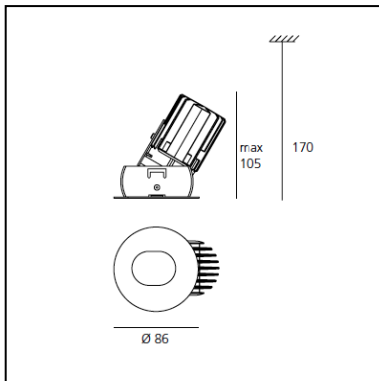

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **408lm**
- CCT: **3000K**
- Efficiency: **30%**
- Efficacy: **34.03lm/W**
- CRI: **90**

Notes

Tilt angle:
Sheet metal panel support (1mm): 34°
Plasterboard support (12.5mm): 29°
Double plasterboard support (25mm): 26°

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights ø86mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038505**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **105 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Rotation: **450 mm°**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **3000K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300




RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038

Rastaf 86 Led round - 12W - 32° - adjustable optic - 3000K - White

Studio Artemide



IP20  

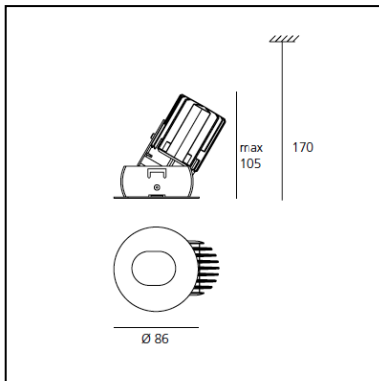

LUMINAIRE

- Watt: **12W**
- Delivered lumen output: **325lm**
- CCT: **3000K**
- Efficiency: **24%**
- Efficacy: **27.04lm/W**
- CRI: **90**

Notes

Tilt angle:
Sheet metal panel support (1mm): 34°
Plasterboard support (12.5mm): 29°
Double plasterboard support (25mm): 26°

DESCRIPTION

Fixed or adjustable recessed LED downlight. Steel body. Optional steel recessing ring with white finish for use with 2 or 3 downlights $\varnothing 86$ mm. Wide range of accessories for recessing into false ceilings, allowing lamp replacement without damaging the surface. Remote transformer. IP44 in version of fixed downlight. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M038705**
- Colour: **White**
- Installation: **Recessed**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Height: **105 mm**
- Diameter: **86 mm**
- Cutout diameter: **72 mm**
- Rotation: **450 mm°**
- Cutout shape: **Rounded**
- Weight: **kg 0.65**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **3000K**

Accessories



RASTAF 86 RECESSING RING Ø78MM FOR FIBER CEILINGS M080018



RASTAF 86 STEEL RECESSING PLATE 425MM WHITE FOR 3 SPOTS M017400



RASTAF 86 ALUMINIUM RECESSING RING Ø78MM M080028



Driver 16/20/23/25/28/32W - 900mA - 220-240 156x52x26 (LxWxH) Dimmable DALI/PUSH M077401



DRIVER cc 15W 350mA 220-240 125 38 23 1max Non dimmable M077500



RASTAF 86 STEEL RECESSING PLATE 275MM WHITE FOR 2 SPOTS M017300



RASTAF 86 STEEL RECESSING RING Ø78MM WITH SPRINGS M080038