

# SKILLED

Recessed LED spot for outdoor use.

Weight resistant up to 3000kg.

Aluminium body, chromed brass and polycarbonate.

Radiant white light effect or RGB created by a clear polycarbonate disk (blue/green/amber/red on request).

1 high-efficiency LED.

IP67, fully-protected against dust and water ingress.

Fixing through aluminium box BOXSKILL1 (not included).



# 6000K

## LAMPING

Source	LED spot
Total power	2W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	67
Dimensions	ø11,8x5cm
Materials	Chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	recessed box not included BOXSKILL1, driver not included, cable 1m. Certified 500kg static load, 3000kg dynamic load. Dimmable 1-10V, DALI, DMX, Casambi

Customization options

Accessories

Net lamp weight

## Codes

BSKL0212G310CS

## Structure



grey

## PACKAGE

Package 01

Dimension: 14,2x14,2x9,3 cm / Gross weight: 1,1 kg

## Certificazioni

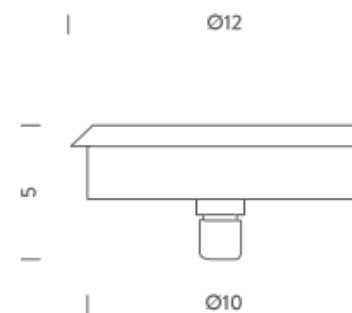

# RGB

## LAMPING

Source	LED spot
Total power	3,6W
Emission	Diffused
Tension	24VDC
Color temperature	RGB
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
Ip class	67
Dimensions	ø11,8x5cm
Materials	Chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	recessed box not included BOXSKILL1, driver not included, cable 1m. Certified 500kg static load, 3000kg dynamic load. Dimmable 1-10V, DALI, DMX, Casambi

Customization options

Colour temperatures

Accessories

Drivers 24VDC + DALI interface, | Recessed box skill, Recessed boxskill 1

Net lamp weight

1 kg

## Codes

BSKL0212G315CS

## Structure


grey

## PACKAGE


Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

## Certificazioni



Ø12

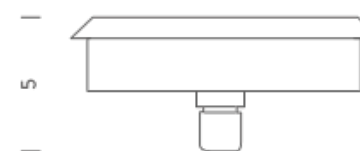

5

Ø10