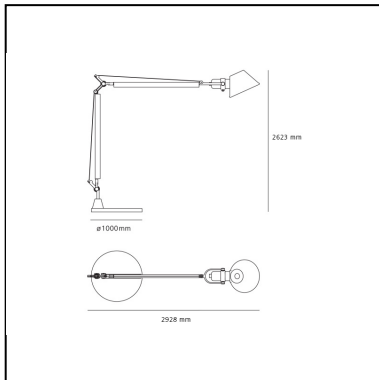# Tolomeo XXL with fixed support - LED

Michele De Lucchi
Giancarlo Fassina

DESCRIPTION

The famous Tolomeo, icon of the Italian Design, becomes giant. In scale 4:1 relative to the table model, it's both indoor and outdoor. Fixed support (pivot) made up of mass-coloured concrete; mobile-arm structure in extruded EN-AW-6060 aluminium with bright anodizing treatment; diffuser in mass-pigmented polypropylene, screen in light-diffusing silkscreened methacrylate, reflector in painted aluminium; polished-painted articulations in die-cast EN-AB 46100 aluminium; adjustment system in AISI 316 stainless steel; silicone seal gaskets.

IP65

FEATURES

– Product Code: **1535150A**
– Colour: **Silver grey**
– Installation: **Floor**
– Material: **Aluminum, technopolymer, cement, inox steel**
– Series: **Architectural Outdoor**
– Environment: **Outdoor**
– Area contract: **Hospitality, null**
– Emission: **Direct Adjustable**
– design by: **Michele De Lucchi, Giancarlo Fassina**

LUMINAIRE

– Watt: **55W**
– Voltage: **220V-240V**
– Delivered lumen output: **5052lm**
– CCT: **3000K**
– Efficiency: **74%**
– Efficacy: **91.85lm/W**
– CRI: **80**

Notes

Suitable for watertight connection.

DIMENSIONS

– Length: **2920 mm**
– Height: **2620 mm**

SOURCES INCLUDED

– Category: **Led**
– Number: **1**
– Watt: **55W**
– Color temperature (K): **3000K**

We reserve the right to change our product specifications. — Last update: August 2023
Please visit www.artemide.com for the latest product information
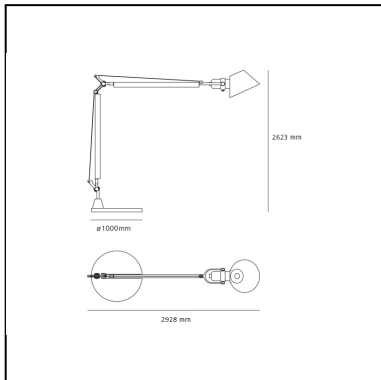
Artemide

Tolomeo XXL with base - LED

Michele De Lucchi
Giancarlo Fassina

DESCRIPTION

The famous Tolomeo, icon of the Italian Design, becomes giant. In scale 4:1 relative to the table model, it's both indoor and outdoor. Base made up of mass-coloured concrete; mobile-arm structure in extruded EN-AW-6060 aluminium with bright anodizing treatment; diffuser in mass-pigmented polypropylene, screen in light-diffusing silkscreened methacrylate, reflector in painted aluminium; polished-painted articulations in die-cast EN-AB 46100 aluminium; adjustment system in AISI 316 stainless steel; silicone seal gaskets.

IP65

FEATURES

– Product Code: **1532150A**
– Colour: **Silver grey**
– Installation: **Floor**
– Material: **Aluminum, technopolymer, cement, inox steel**
– Series: **Architectural Outdoor**
– Environment: **Outdoor**
– Area contract: **Hospitality, null**
– Emission: **Direct Adjustable**
– design by: **Michele De Lucchi, Giancarlo Fassina**

DIMENSIONS

– Length: **2920 mm**
– Height: **2620 mm**
– Base Diameter: **1000 mm**

SOURCES INCLUDED

– Category: **Led**
– Number: **1**
– Watt: **55W**
– Color temperature (K): **3000K**

LUMINAIRE

– Watt: **55W**
– Voltage: **220V-240V**
– Delivered lumen output: **5052lm**
– CCT: **3000K**
– Efficiency: **74%**
– Efficacy: **91.85lm/W**
– CRI: **80**

Notes

Suitable for watertight connection.

We reserve the right to change our product specifications. — Last update: August 2023
Please visit www.artemide.com for the latest product information

Artemide