

# UNTITLED READING CONE

*Bernhard Osann*

A definitive synthesis of mechanics and lighting technology, this design is clean and essential, with miniaturized joints that allow for extreme flexibility of movement. The Linear version has been designed explicitly with optics to ensure maximum visual comfort in work environments.



2700K

### LAMPING

Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	110-240V
Color temperature	2700K
Luminous flux	395lm
Typ CRI	90
IP class	20
Materials	aluminum, technopolymer
Notes	Cable length 2m, 40° optic, 155° joint rotation
Net lamp weight	5 kg

### Codes

UNT LN2 2C  
UNT LN2 2D


### Structure/Diffuser

black/gold  
black/black

### PACKAGE

Package 01 Dimension: 206x15x11 cm / Gross weight: 4,5 kg  
Package 02 Dimension: 24x20x8 cm / Gross weight: 1,5 kg

### Certificazioni

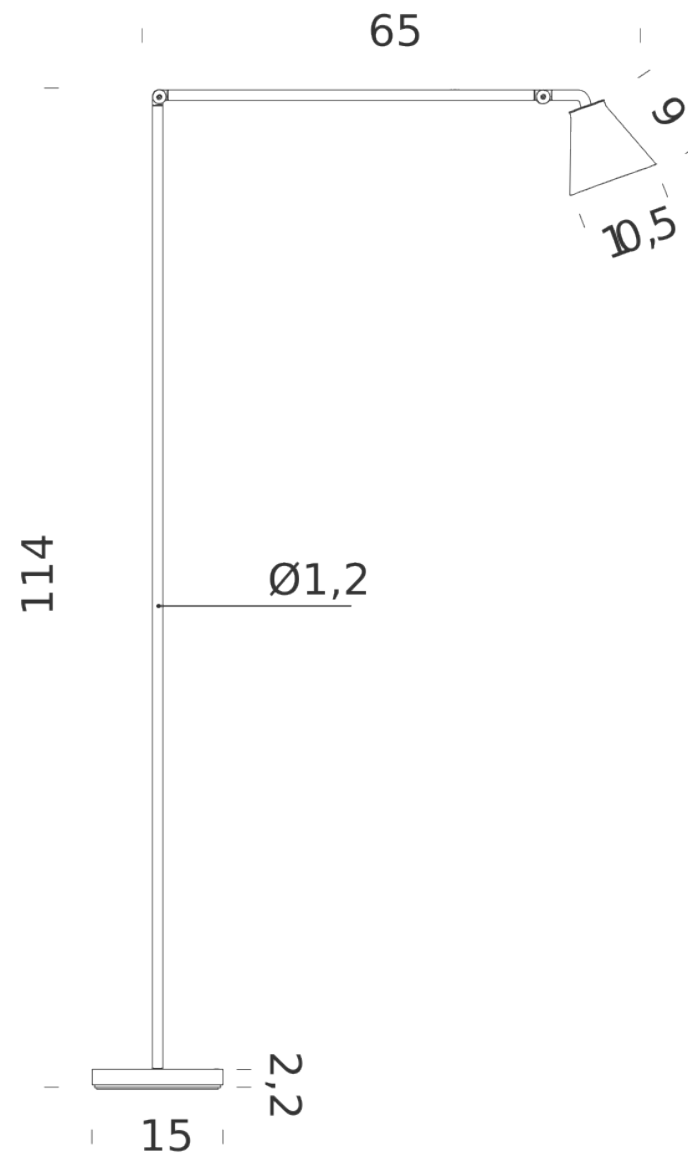

3000K

### LAMPING

Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	110-240V
Color temperature	3000K
Luminous flux	395lm
Typ CRI	90
IP class	20
Materials	aluminum, technopolymer
Notes	Cable length 2m, 40° optic, 155° joint rotation
Net lamp weight	5 kg

### Codes

UNT LNN 2C  
UNT LNN 2D

### Structure/Diffuser

black/gold  
black/black

### PACKAGE

Package 01	Dimension: 206x15x11 cm / Gross weight: 4,5 kg
Package 02	Dimension: 24x20x8 cm / Gross weight: 1,5 kg

### Certificazioni

