


ZIRKOL GAP

Starting from Zirkol Circle, Zirkol Gap is for general and decorative lighting. Anodised aluminium body and opal cover for homogeneous downlight and uplight emission. Available in the finishes black, white and matte gold and with LED colour temperatures of 2700K, 3000K and 4000K. Remote driver and dimmer interface included.

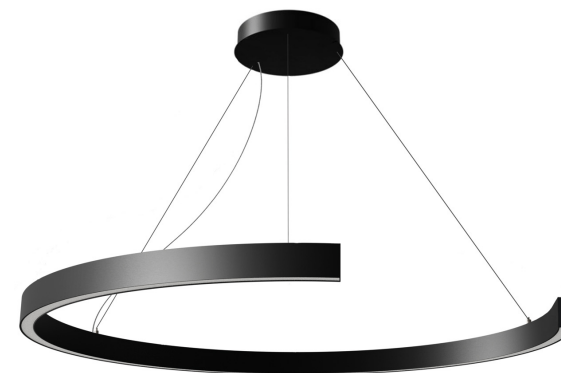

Ø0,85M | UP-DOWNLIGHT | 2700K

LAMPING

Source	Linear LED
Total power	45W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled

Codes

BZRG1708G15DBO
BZRG1708G15DNE
BZRG1708G15DOR



Structure

white
black
matte gold

Certificazioni




ZIRKOL GAP 0,85-1-1,5m



Ø85/100/150

ZIRKOL GAP



Ø0,85M | UP-DOWNLIGHT | 3000K

LAMPING

Source	Linear LED
Total power	45W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	3300lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1708G15WBO
BZRG1708G15WNE
BZRG1708G15WOR

Structure

white
black
matte gold

Certificazioni

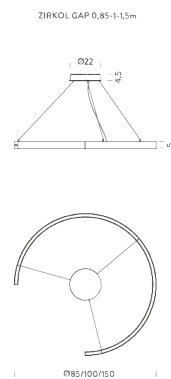

Ø0,85M | UP-DOWNLIGHT | 4000K

LAMPING

Source	Linear LED
Total power	45W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	3540lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1708G15NBO
BZRG1708G15NNE
BZRG1708G15NOR

Structure

white
black
matte gold

Certificazioni

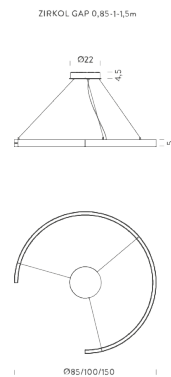

Ø1M | UP-DOWNLIGHT | 2700K

LAMPING

Source	Linear LED
Total power	68W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1710G15DBO
BZRG1710G15DNE
BZRG1710G15DOR

Structure

white
black
matte gold

Certificazioni

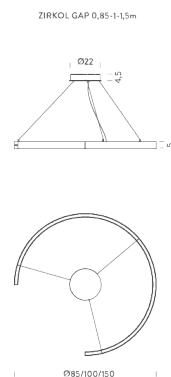

Ø1M | UP-DOWNLIGHT | 3000K

LAMPING

Source	Linear LED
Total power	68W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled

Codes

BZRG1710G15WBO
BZRG1710G15WNE
BZRG1710G15WOR



Structure

white
black
matte gold

Certificazioni




ZIRKOL GAP 0,85-1-1,5m



Ø85/100/150

ZIRKOL GAP



Ø1M | UP-DOWNLIGHT | 4000K

LAMPING

Source	Linear LED
Total power	68W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	4615lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1710G15NBO
BZRG1710G15NNE
BZRG1710G15NOR

Structure

white
black
matte gold

Certificazioni

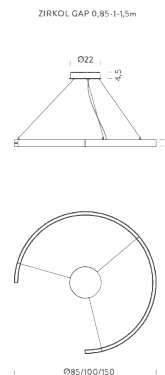

Ø1,5M | UP-DOWNLIGHT | 2700K

LAMPING

Source	Linear LED
Total power	90W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	5885lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1715G15DBO
BZRG1715G15DNE
BZRG1715G15DOR

Structure

white
black
matte gold

Certificazioni

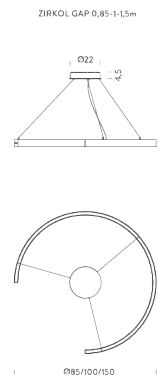

Ø1,5M | UP-DOWNLIGHT | 3000K

LAMPING

Source	Linear LED
Total power	90W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	6231lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled



Codes

BZRG1715G15WBO
BZRG1715G15WNE
BZRG1715G15WOR

Structure

white
black
matte gold

Certificazioni

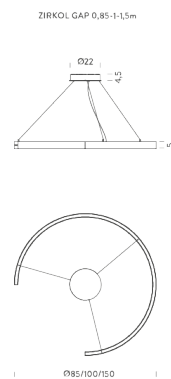

Ø1,5M | UP-DOWNLIGHT | 4000K

LAMPING

Source	Linear LED
Total power	90W
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5885lm
Typ CRI	90
Notes	RAL 9005 black RAL 9016 white shipped assembled

Codes

BZRG1715G15NBO
BZRG1715G15NNE
BZRG1715G15NOR



Structure

white
black
matte gold

Certificazioni



ZIRKOL GAP 0,85-1-1,5m



Ø85/100/150

ZIRKOL GAP

