


# ZIRKOL SQUARE

ZIRKOL – S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver and dimmer interface included

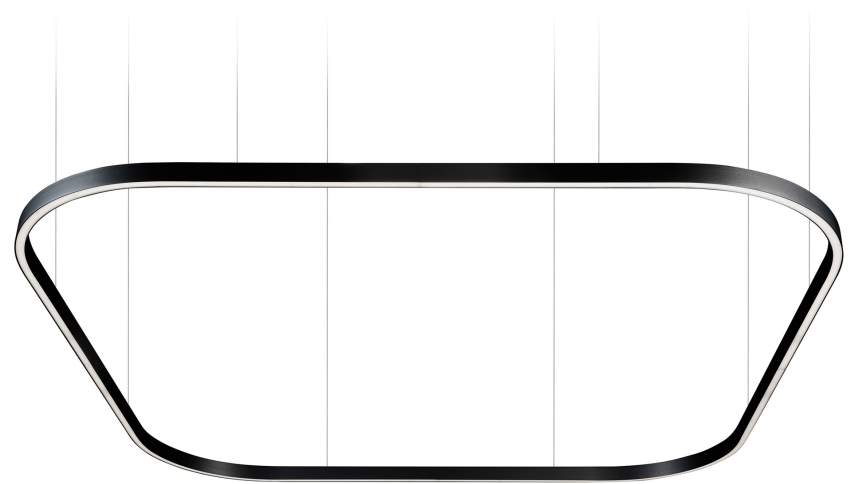

# 1,5X1,5M | UP - DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8863lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15DBO  
BZRQ1712G15DNE  
BZRQ1712G15DOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

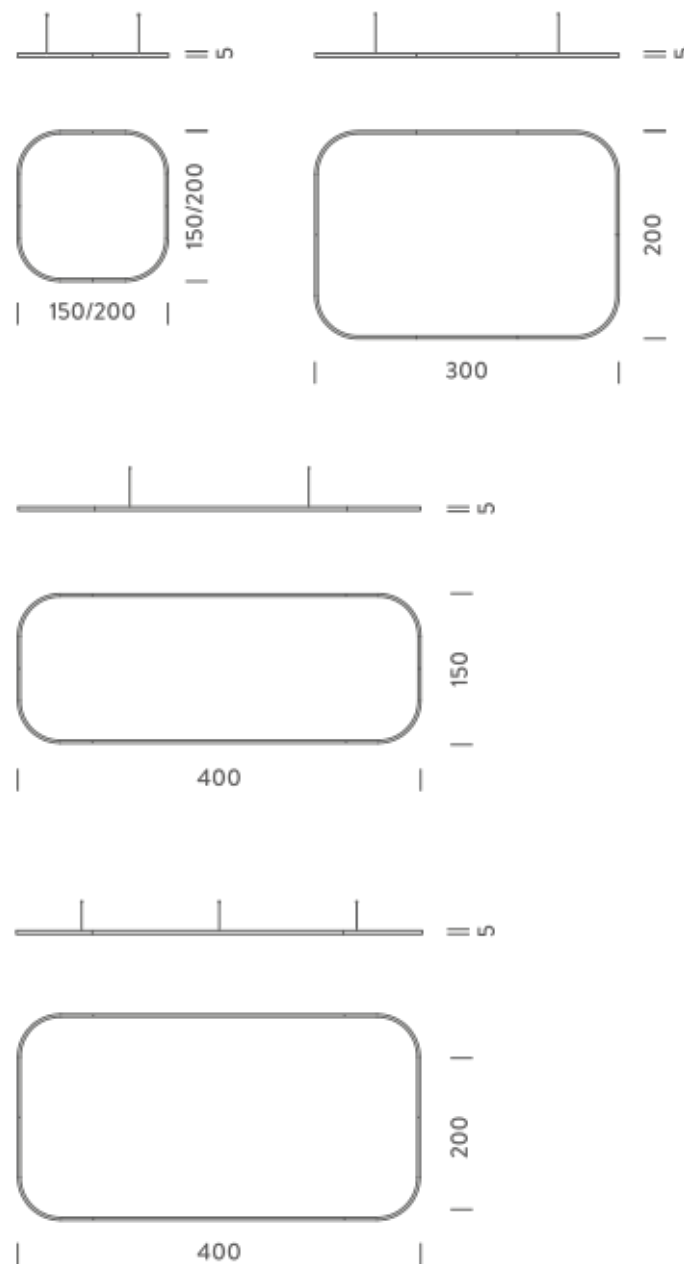

## Certificazioni



NEMO 3.000

# 1,5X1,5M | UP - DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9384lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15WBO  
BZRQ1712G15WNE  
BZRQ1712G15WOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

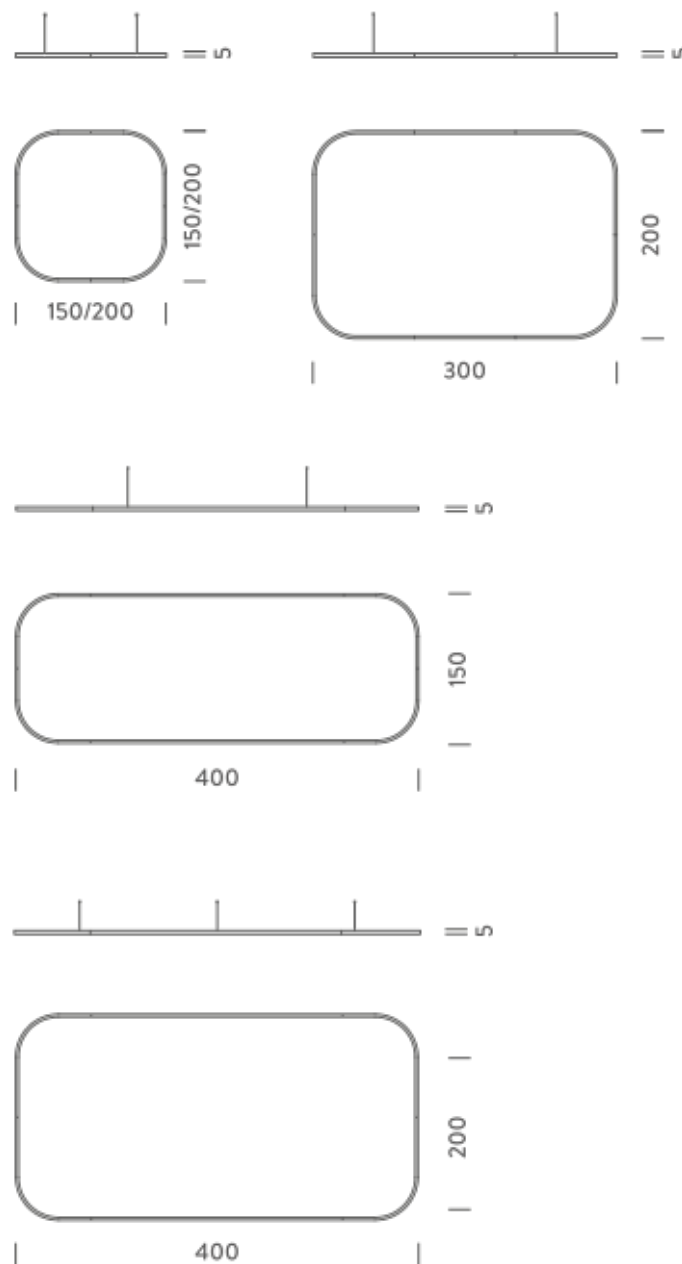

## Certificazioni



NEMO s.p.a.

# 1,5X1,5M | UP - DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10427lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15NBO  
BZRQ1712G15NNE  
BZRQ1712G15NOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

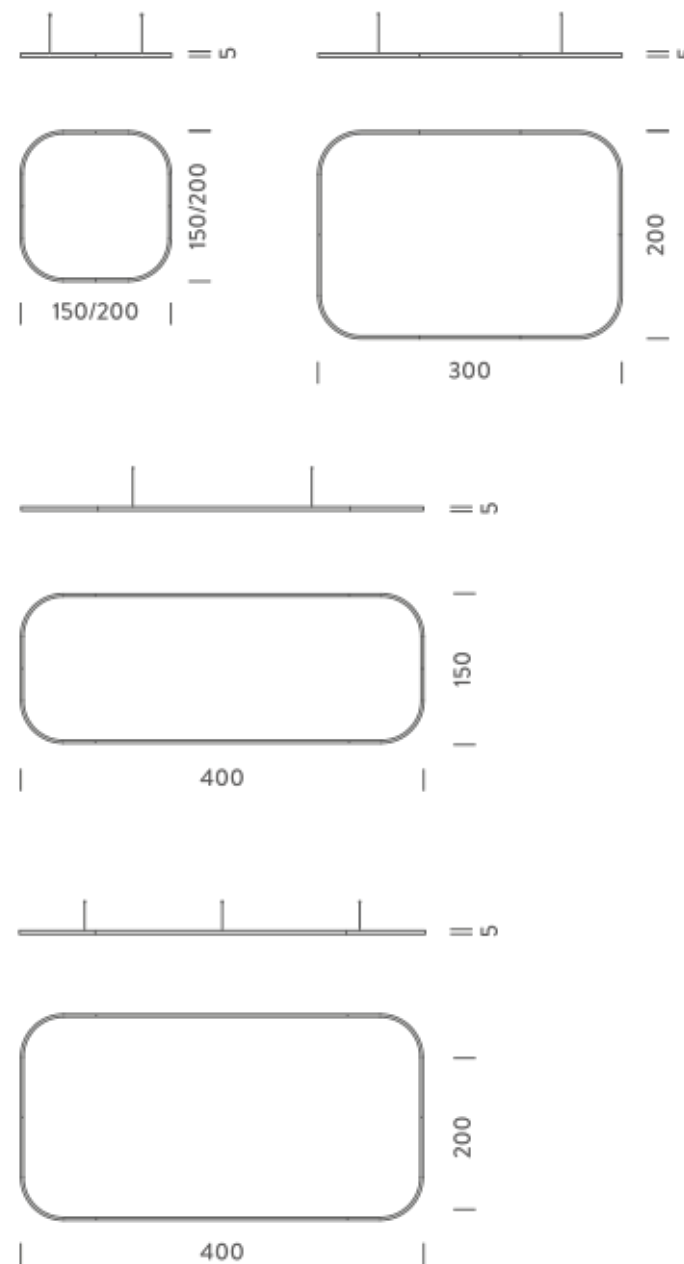

## Certificazioni



NEMO s.p.a.

## 2X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	12195lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1716G15DBO  
BZRQ1716G15DNE  
BZRQ1716G15DOR

Shapes, sizes  
Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

### Structure

white  
black  
gold

### PACKAGE


### Package 01

Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

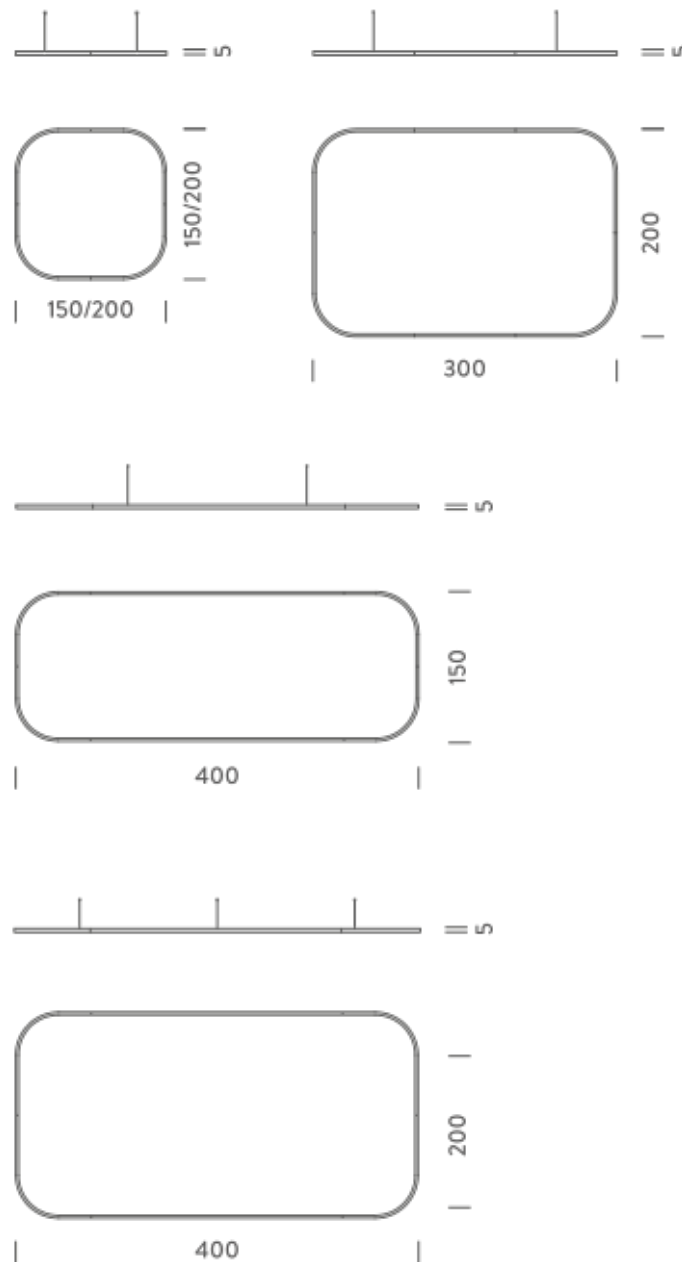

## 2X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	12912lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRQ1716G15WBO  
BZRQ1716G15WNE  
BZRQ1716G15WOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO s.p.a.

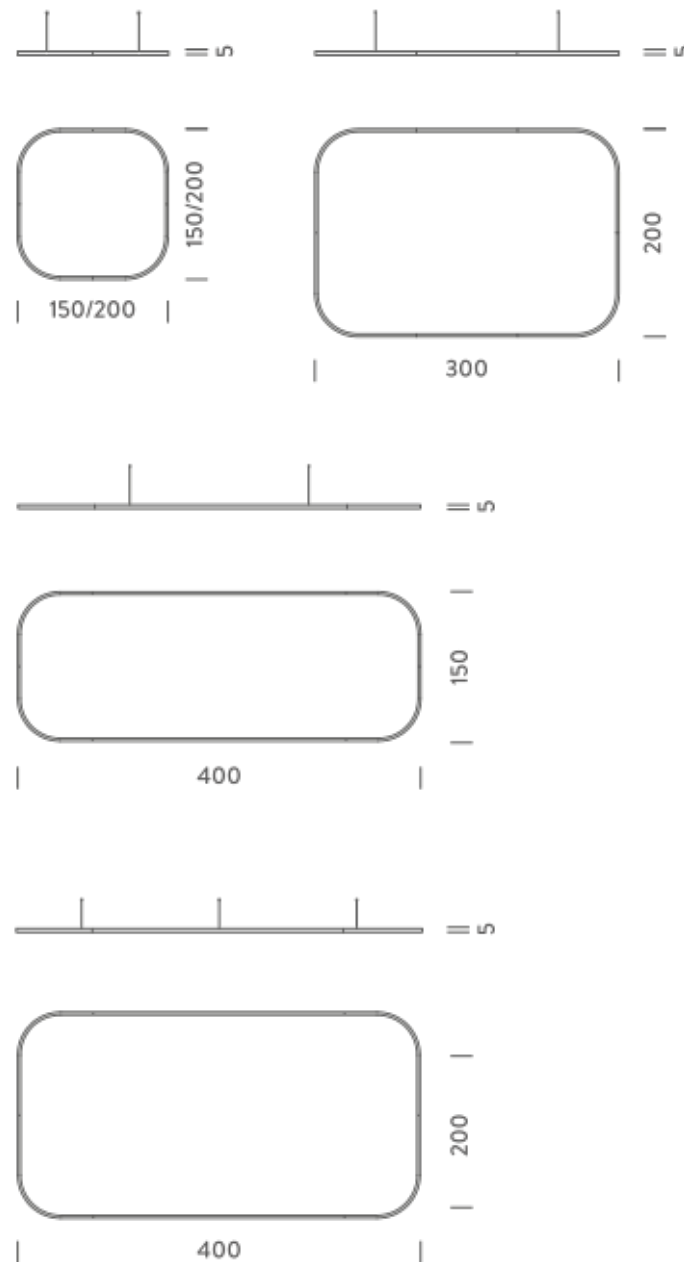

## 2X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	14347lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1716G15NBO  
BZRQ1716G15NNE  
BZRQ1716G15NOR

### PACKAGE


Package 01

Structure	white black gold
Dimensions	210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

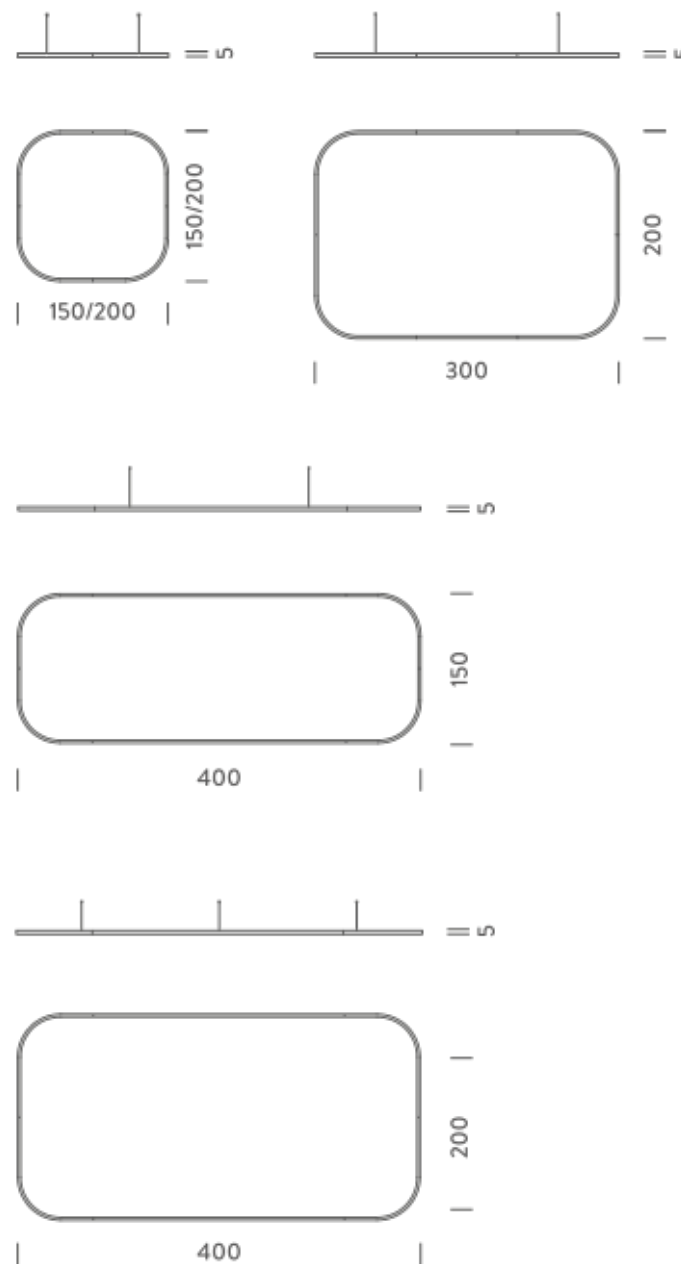

## 3X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	15527lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15DBO  
BZRQ1720G15DNE  
BZRQ1720G15DOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

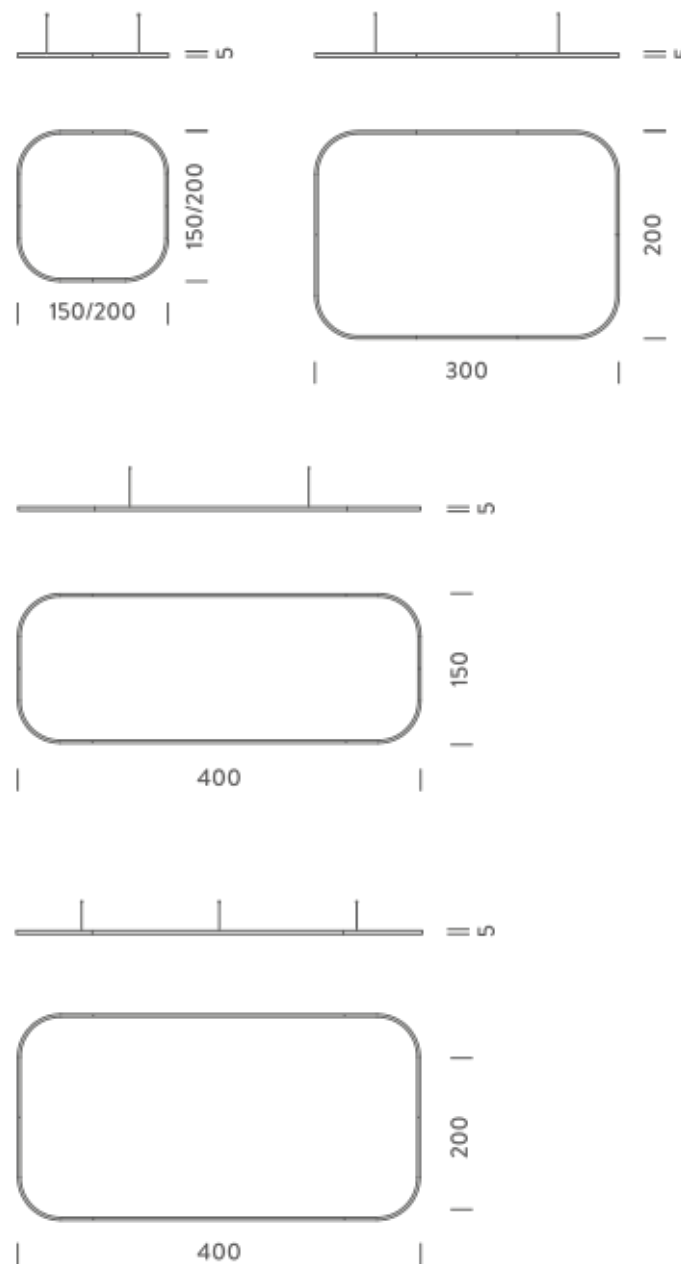

### Certificazioni



NEMO 3.000



## 3X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	16440lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15WBO  
BZRQ1720G15WNE  
BZRQ1720G15WOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO 3.000

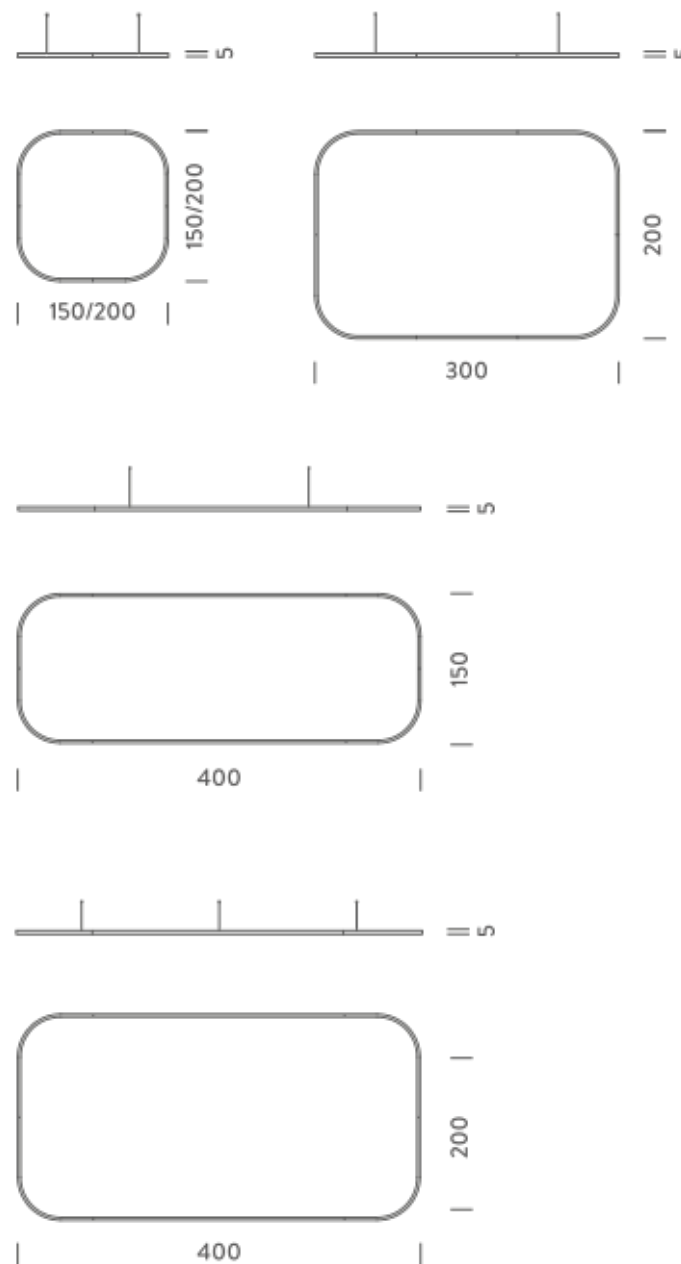

## 3X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	18267lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15NBO

BZRQ1720G15NNE

BZRQ1720G15NOR

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO<sup>3,000</sup>

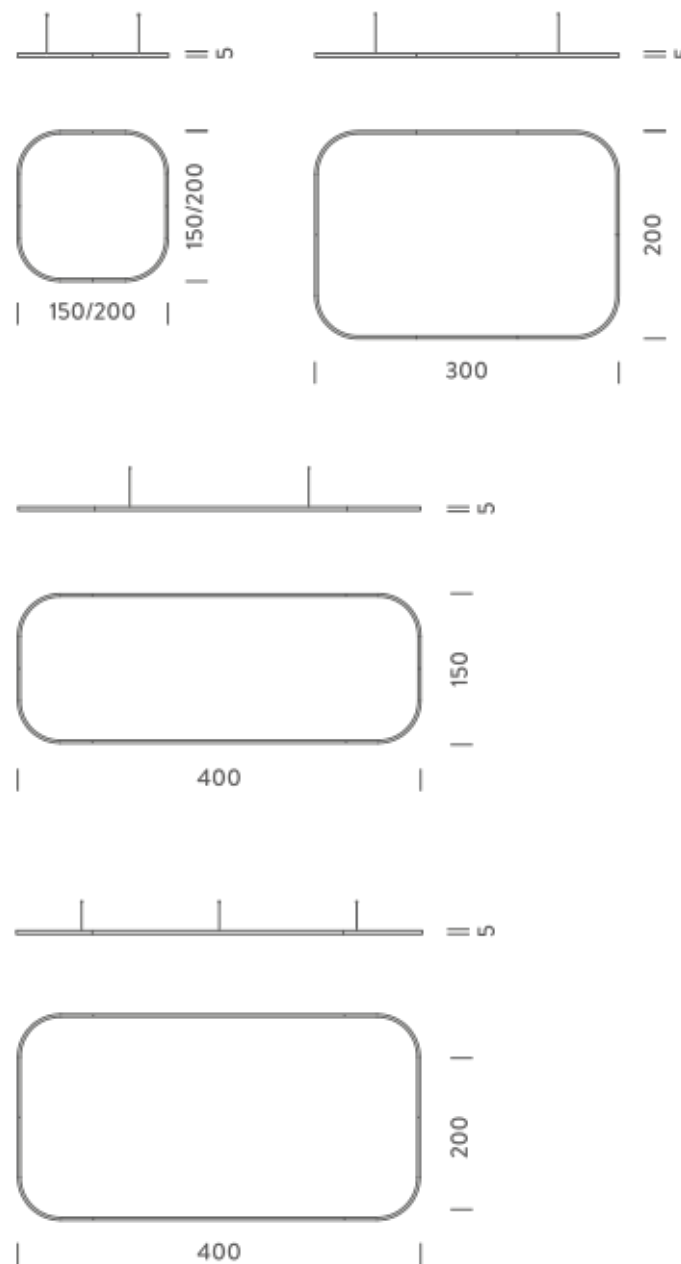

## 4X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	17193lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1722G15DBO  
BZRQ1722G15DNE  
BZRQ1722G15DOR

### PACKAGE

Package 01

### Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

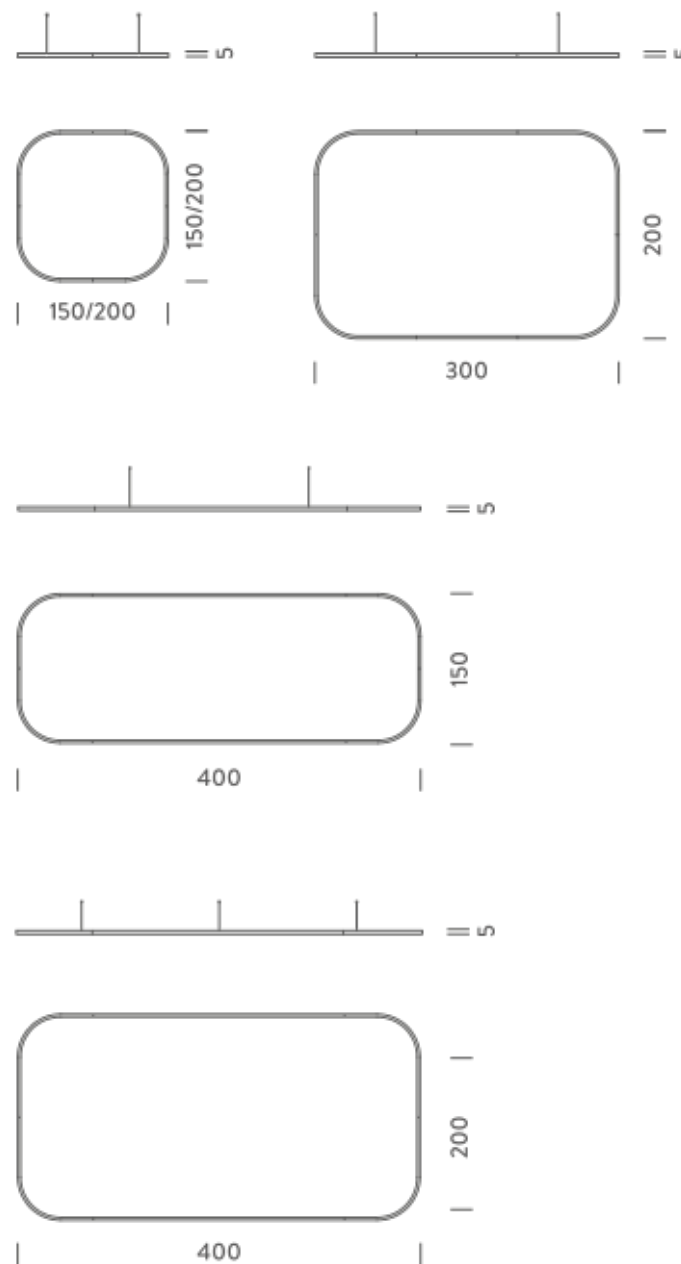

### Certificazioni



NEMO<sup>3.000</sup>

## 4X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	18204lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1722G15WBO  
BZRQ1722G15WNE  
BZRQ1722G15WOR

### PACKAGE

Package 01

### Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

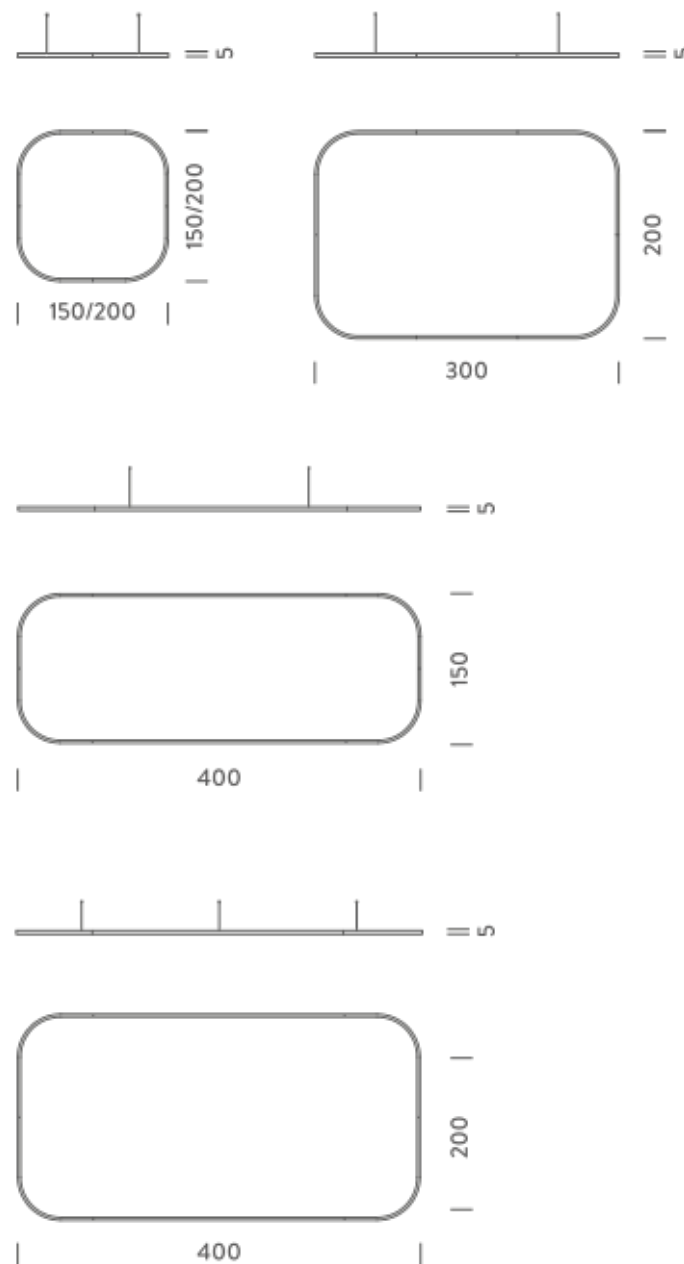

### Certificazioni



NEMO

## 4X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	20227lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

### Codes

BZRQ1722G15NBO  
BZRQ1722G15NNE  
BZRQ1722G15NOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

### Certificazioni



NEMO<sup>3.000</sup>

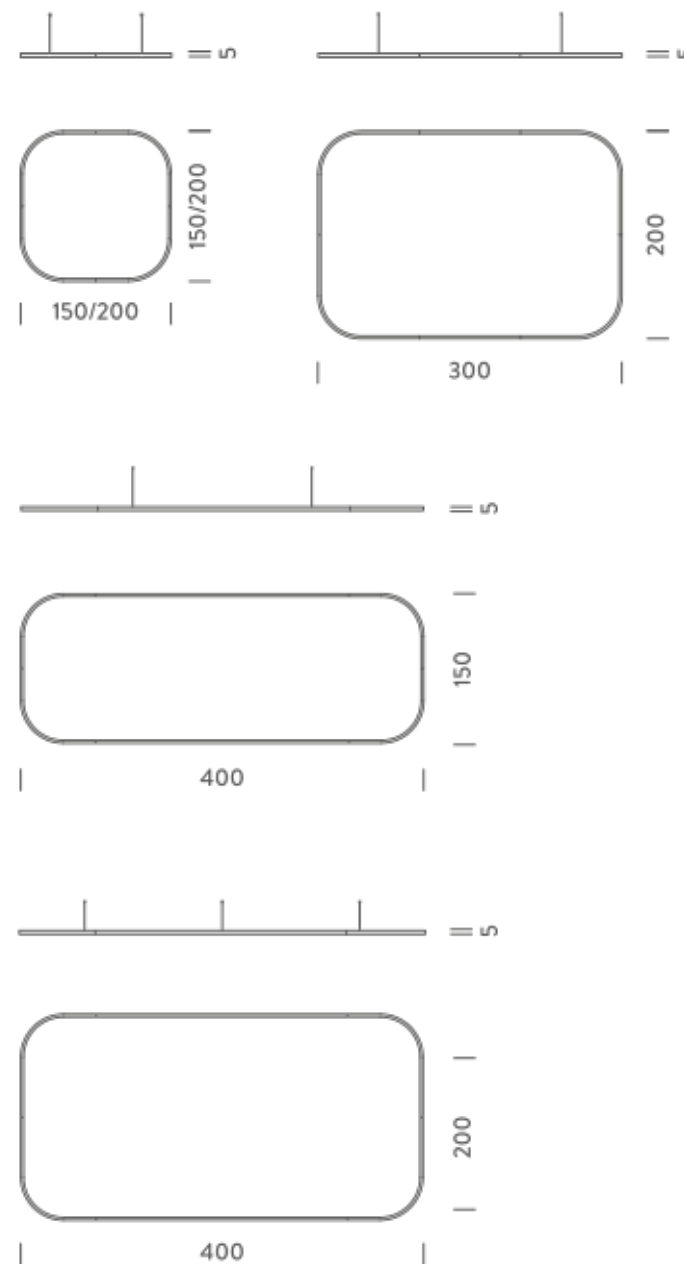

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	18859lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg


### Codes

BZRQ1724G15DBO  
BZRQ1724G15DNE  
BZRQ1724G15DOR

### PACKAGE

Package 01


### Certificazioni



### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

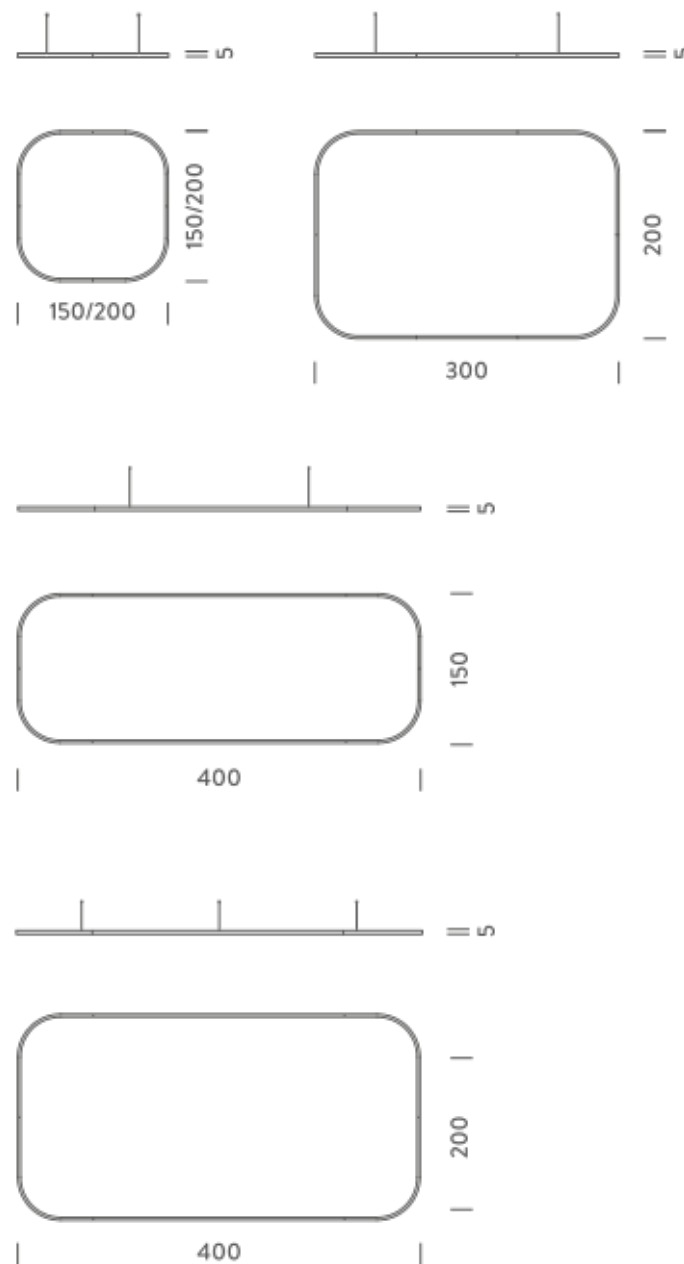

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	19968lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15WBO  
BZRQ1724G15WNE  
BZRQ1724G15WOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Certificazioni

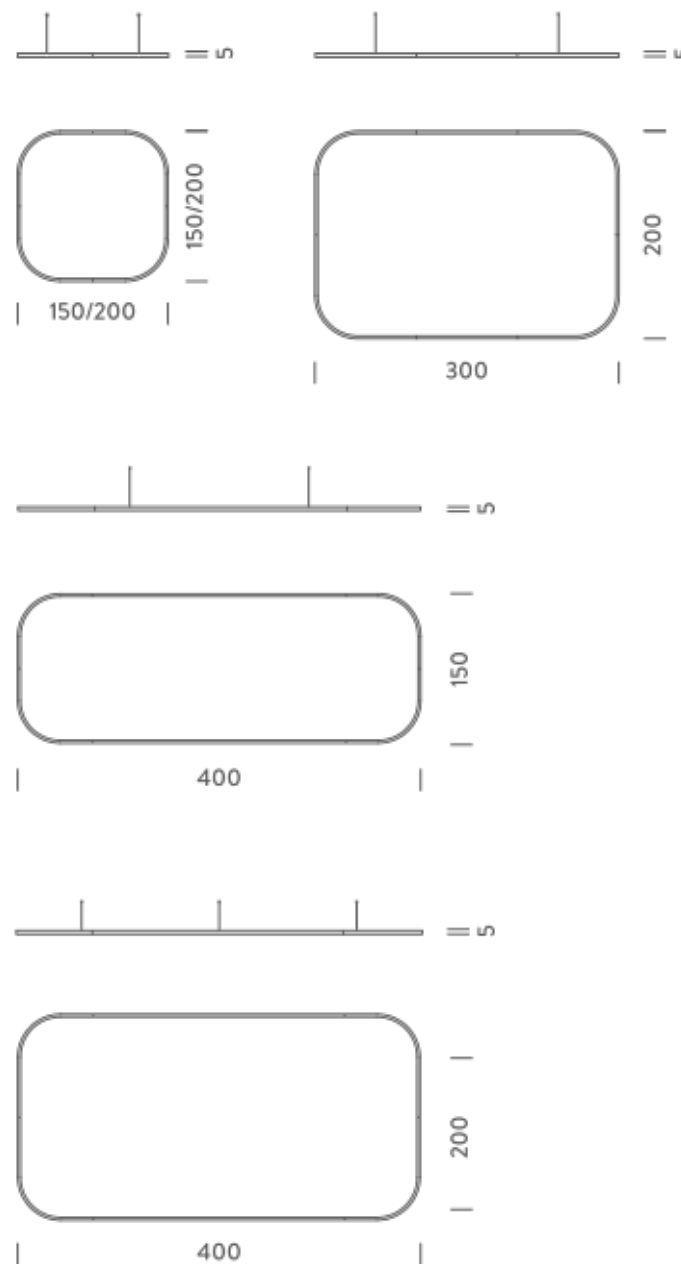

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	22187lm
Initial luminaire efficacy	35lm/W
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15NBO  
BZRQ1724G15NNE  
BZRQ1724G15NOR


### PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Structure

white  
black  
gold

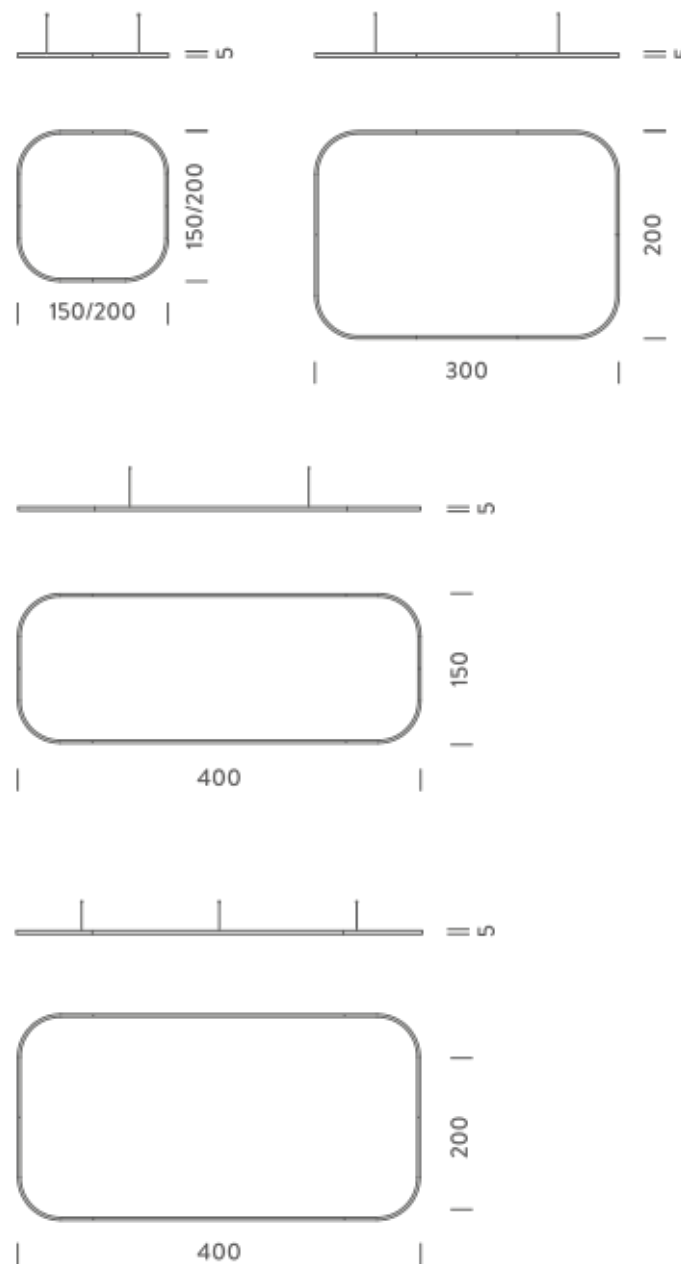

### Certificazioni

