



Parentesi

Designed by Achille Castiglioni and Pio Manzu, 1971



Halogen - 150W

Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer housing a switch. Length of power cord from lamp-holder 4000 mm. Net weight 3 kg.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

4000 mm max

ø 110 mm

Main specifications

EAN	8059607020296
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSR
Number of heads	1
Dower (M)	150

Physical

Colour	Nickel
Cord length (mm)	4000
Net weight (kg)	3.2
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m3)	0.01
IP internal	20



Mounting instructions	业 PDF
Spare Parts	业 PDF

Photometric Files

LDT / IES



Technical Drawings

2D	⊥ ZIP
3D	⊥ ZIP
a Bim	.↓. ZIP



20

















https://professional.flos.com/en/global/product/parentesi-f5400058/

F5400058

Schematic light drawing



Beam Angle:		131°
h(m)	E(lx)	D(m)
1	156	4.37
2	39	8.75
3	17	13.12
4	10	17.50
5	6	21.87

Luminous flux luminaire 652 lm

Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Switch Integrated (Remote Dimmable)
Plug type	Type C
Batteries inside	No
Charging min time	No

Accessories & Power Supply



F5500058

Parentesi Element





NOT INCLUDED

RF31459


LED Reflector Frosted Lamp E27 13W 2700K R125 Dimmable

NOT INCLUDED

RF32366


LED Lamp 12W E27 220-240V 2700K R125

Spare Parts



01.	Complete nickel rose	RF5400158
02.	Anchor hook screw	RF06745
03.	Parentesi 4m steel cable	RF01442
03.	Parentesi 6m steel cable	RF01444
04.	Nickel tube	RF02896
05.	Parentesi inox turnbuckle & grub	RF01438
	screw	
07.	Hook + nut	RF06747
08.	Parentesi switch assembly	RF04633
09.	Parentesi rubber support	RF06068
12.	Kit wire ties and screw	RF5600200

DOWNLOAD

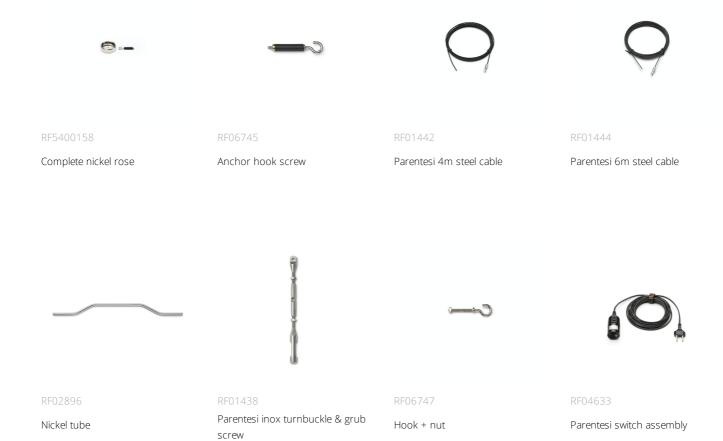



RF06068

RF5600200

Parentesi rubber support

Kit wire ties and screw





Parentesi dimmer

Designed by Achille Castiglioni and Pio Manzu, 1971

Halogen - 150W

Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607020470
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSR
Number of heads	1
Power (W)	150

Physical

Colour	Nickel
Cord length (mm)	4000
Net weight (kg)	3.57
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m3)	0.01
IP internal	20



Download

Mounting instructions	₹ PDF
pare Parts	业 PDF

Photometric Files

LDT / IES



Technical Drawings

2D	<u>↓</u> ZIP
3D	⊥ ZIP
∂ Bim	⊥ ZIP



20

















https://professional.flos.com/en/global/product/parentesi-dimmer-f5600058/

F5600058

Schematic light drawing



Beam	Beam Angle:	
h(m)	E(lx)	D(m)
1	156	4.37
2	39	8.75
3	17	13.12
4	10	17.50
5	6	21.87

Luminous flux luminaire 652 lm

Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No
Charging min time	No

Accessories & Power Supply



F5700058

Parentesi dimmer Element





NOT INCLUDED

RF31459


LED Reflector Frosted Lamp E27 13W 2700K R125 Dimmable

NOT INCLUDED

RF32366


LED Lamp 12W E27 220-240V 2700K R125

Spare Parts



01.	Complete nickel rose	RF5400158
02.	Anchor hook screw	RF06745
03.	Parentesi 4m steel cable	RF01442
03.	Parentesi 6m steel cable	RF01444
04.	Nickel tube	RF02896
05.	Parentesi inox turnbuckle & grub	RF01438
	screw	
07.	Hook + nut	RF06747
09.	Parentesi rubber support	RF06068
11.	Led rondo' dimmer 220/240v 40-	RF28045
	250w 4-100w	
12.	Kit wire ties and screw	RF5600200

DOWNLOAD

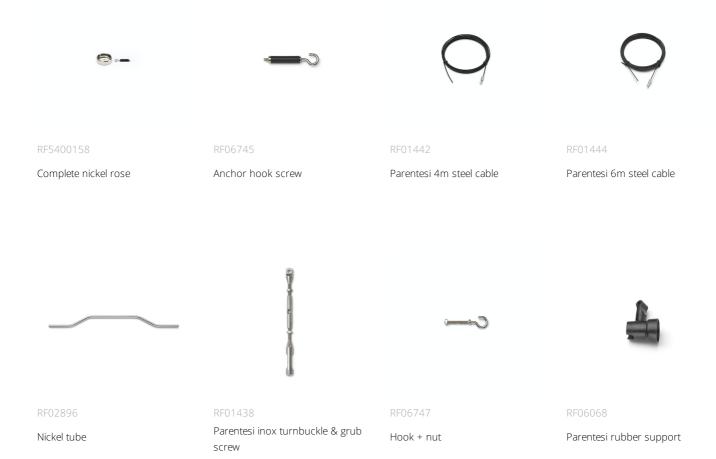



RF28045 Led rondo' dimmer 220/240v 40-250w 4-100w



RF5600200

Kit wire ties and screw